


**Buchsenleisten, Raster 1.27, Einreihig**  
**Female Header, Pitch 1.27, Single Row**



**Isolierkörper**

Polyester, UL 94V-0

**Kontakte**

Phosphor Bronze

**Strombelastbarkeit**

1A

**Isolationswiderstand**

min 5000 MΩ

**Kontaktwiderstand**

max. 20 mΩ

**Spannungsfestigkeit**

500 V AC

**Betriebstemperatur**

-40°C bis +105°C

**Insulator**

Polyester, UL 94V-0

**Contacts**

Phosphor bronze

**Current rating**

1A

**Insulation resistance**

min 5000 MΩ

**Contact resistance**


max. 20 mΩ

**Tensile strength**

500 V AC

**Operating temperature**

-40°C bis +105°C

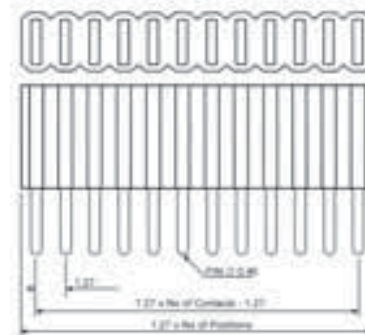

Bestellcode: **A** - **BL127** - **EG** - **x** - **x** - **D**  
 Ordercode :

Bitte „x“ durch die unten geeignete Option ersetzen  
 Please replace „x“ with appropriate option listed below

1. 2.

1.

**Oberfläche**

G -flash vergoldet \*  
 Z -verzinkt  
 S -selektiv

**Contact plating**

G -gold flash \*  
 Z -tinned  
 S -selective

2.

**Polzahl**

06 - 40

**Number of contacts**

06 - 40

\* Standard