


BB02-KZ :-2.54mm (0.1") SOCKET, STRAIGHT, T/H, DUAL ROW - 04 to 80 CONTACTS, DUAL ENTRY


SPECIFICATIONS

CURRENT RATING 3 AMP
 INSULATOR RESISTANCE 1000 MEGOHMS MIN.
 CONTACT RESISTANCE 20m ohms MAX.
 DIELECTRIC WITHSTANDING AC 600 V
 OPERATING TEMPREATURE -40°FXC TO +105°FXC
 CONTACT MATERIAL PHOSPHOR BRONZE
 INSULATOR MATERIAL POLYESTER, UL 94-2
 STANDARD NYLON 6T(T5)+30%G.F.
 (LCP AVAILABLE UPON REQUEST)
 FINISH: GOLD, SELECTIVE, OR TIN PLATED
 SOLDERABILITY IR REFLOW: 260°C FOR 10 SEC
 WAVE: 230°C FOR 5-10 SEC
 MANUAL SOLDER: 350°C FOR 3-5 SEC

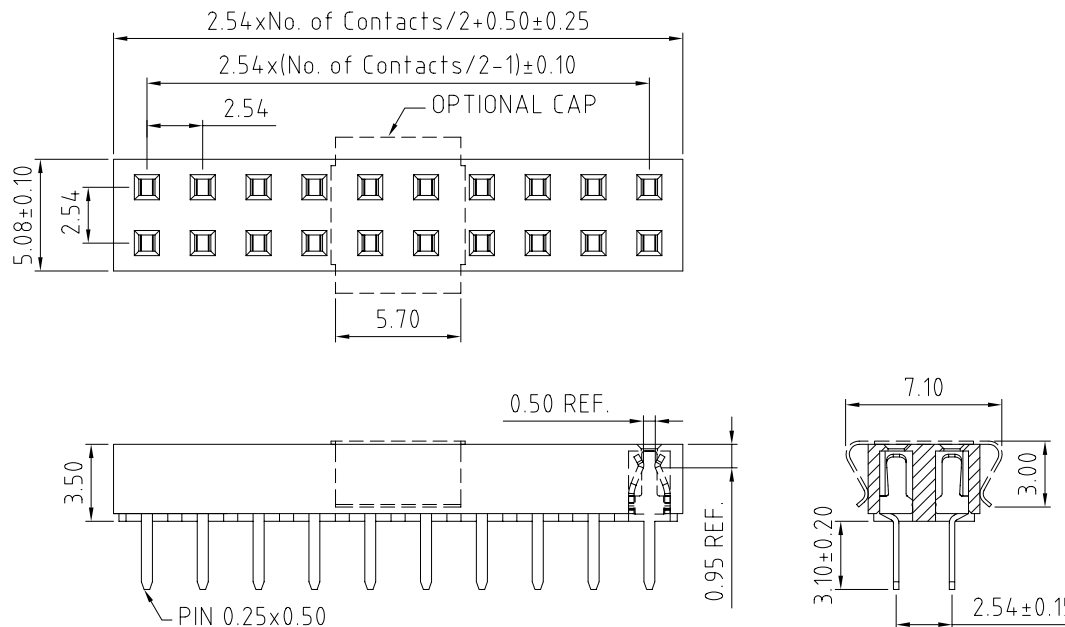

MATES WITH: BB02-HE BB02-HQ
 BB02-HF BB02-HR
 BB02-HJ BB02-HU
 BB02-HK BB02-TB
 BB02-HP


HOW TO ORDER



NO. OF CONTACTS
04 TO 80

CONTACT PLATING
 GOLD FLASH = K
 10 MICRO INCHES GOLD = A
 15 MICRO INCHES GOLD = B
 30 MICRO INCHES GOLD = C
 TIN = T
 SELECTIVE GOLD FLASH = D
 10 MICRO INCHES SELECTIVE GOLD = E
 15 MICRO INCHES SELECTIVE GOLD = F
 30 MICRO INCHES SELECTIVE GOLD = G
 STANDARD = K

PACKAGING OPTIONS
 3 - TUBE
 5 - TUBE & CAP
 6 - T & R
 8 - T & R & CAP
 STANDARD = 3



RECOMMENDED PC BOARD HOLE LAYOUT

REV. DATE & DRN
10 17/07/05 - NYW RELEASE

Scale: 4:1	THIRD ANGLE	Unstated Tolerances: 0 Dec Places 1 Dec Places 2 Dec Places 3 Dec Places	Material SEE NOTE	 www.gradconn.com	Type: BB02-KZ
Drawn: NYW			NOT TO SCALE		BB02-KZ
App'd: XXXX	Title: SOCKET		Unit: mm		Drawing Number:
Date: 17 OCT '06	Revision: 1.0				Sheet 1 of 1
					Drawing © E and O E

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT