



RUE SAINT-HENRI 11, P.O. BOX 834 - CH-2800 DELÉMONT / SWITZERLAND

Your selected product

PCB Connectors - Straight solder tail

Series 351

351-PP-1NN-00-003101

Single row

2.54 mm, Straight solder tail, Pin Ø 0.47 mm

Pin connectors, solder tail.

Technical specs.:

Insulator: Black glass filled polyester PCT-GF30-FR

Flammability: UL 94V-O

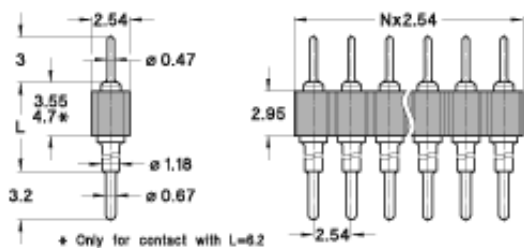
Contact: Brass CuZn36Pb3 (C36000)

Connecting pin Ø: 0.47 mm

Mechanical life: Min. 500 cycles

Rated current: 3 A

Dielectric strength: Min. 1000 V RMS



Ordering information RoHS-compliant parts

PP Plating code Termination Connecting pin

10 Gold 0.25 µm Gold 0.25 µm

80 Tin Tin

NN number of poles. Replace **NN** with the requested number of poles, e.g. 451-10-2**NN**-00-003101 for a double row version with 8 pins becomes 451-10-2**08**-00-003101.

[General technical specs.](#) [View CAD](#)

351-PP-1NN-00-003101

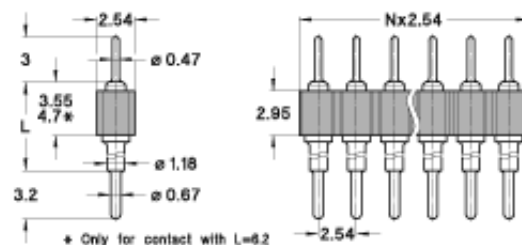
Straight interconnect pin connector: solder tail, single row.

Pin Ø 0.47 mm

Availability from: 2 to 64 contacts.

Standard number of contacts 64.

L = 6.2 mm

**351-PP-1NN-00-004101**

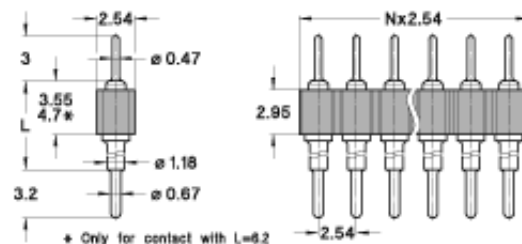
Straight interconnect pin connector: solder tail, single row.

Pin Ø 0.47 mm

Availability from: 2 to 64 contacts.

Standard number of contacts 64.

L = 8.4 mm

**351-PP-1NN-00-005101**

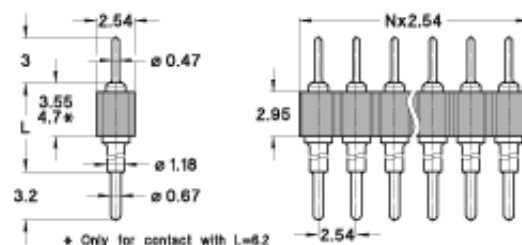
Straight interconnect pin connector: solder tail, single row.

Pin Ø 0.47 mm

Availability from: 2 to 64 contacts.

Standard number of contacts 64.

L = 15.3 mm



351-PP-1NN-00-016101

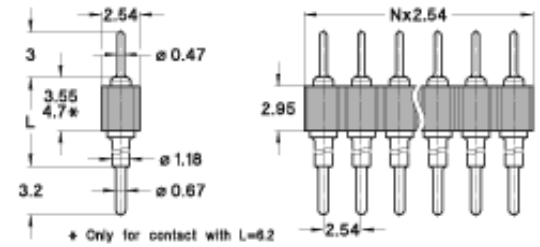
Straight interconnect pin connector: solder tail, single row.

Pin Ø 0.47 mm

Availability from: 2 to 64 contacts.

Standard number of contacts 64.

L = 21.2 mm

**351-PP-1NN-00-017101**

Straight interconnect pin connector: solder tail, single row.

Pin Ø 0.47 mm

Availability from: 2 to 64 contacts.

Standard number of contacts 64.

L = 27.4 mm

