

**SN5451, SN54LS51, SN54S51,  
SN7451, SN74LS51, SN74S51  
AND-OR-INVERT GATES**

DECEMBER 1983 ~ REVISED MARCH 1988

- Package Options Include Plastic "Small Outline" Packages, Ceramic Chip Carriers and Flat Packages, and Plastic and Ceramic DIPs
- Dependable Texas Instruments Quality and Reliability

#### description


The '51 and 'S51 contain two independent 2-wide 2-input AND-OR-INVERT gates. They perform the Boolean function  $Y = \overline{AB} + \overline{CD}$ .

The 'LS51 contains one 2-wide 3-input and one 2-wide 2-input AND-OR-INVERT gates. They perform the Boolean functions  $1Y = (\overline{1A} \cdot \overline{1B} \cdot \overline{1C}) + (\overline{1D} \cdot \overline{1E} \cdot \overline{1F})$  and  $2Y = (\overline{2A} \cdot \overline{2B}) + (\overline{2C} \cdot \overline{2D})$ .


The SN5451, SN54LS51, and SN54S51 are characterized for operation over the full military temperature range of  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . The SN7451, SN74LS51 and SN74S51 are characterized for operation from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ .

#### logic diagrams

'51, 'S51

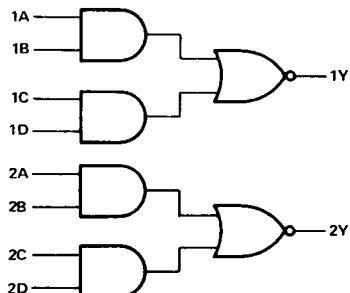


'LS51

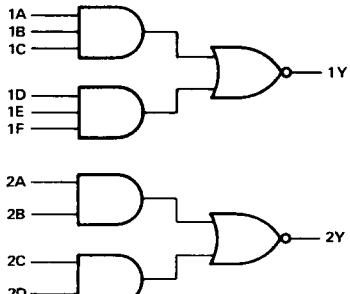


**SN5451 . . . J PACKAGE  
SN54S51 . . . J OR W PACKAGE  
SN7451 . . . N PACKAGE  
SN74S51 . . . D OR N PACKAGE**

(TOP VIEW)




**SN5451 . . . W PACKAGE**

(TOP VIEW)



**SN54LS51 . . . J OR W PACKAGE  
SN74LS51 . . . D OR N PACKAGE**

(TOP VIEW)



NC - No internal connection


NU - Make no external connection

2


TTL Devices

**SN5451, SN54LS51, SN54S51,  
SN7451, SN74LS51, SN74S51  
AND-OR-INVERT GATES**

**SN54S51 . . . FK PACKAGE  
(TOP VIEW)**



**SN54LS51 . . . FK PACKAGE  
(TOP VIEW)**




NC - No internal connection  
NU - Make no external connection

## 2

### logic symbols†


### TTL Devices

'51, 'S51



positive logic:  $Y = \overline{AB} + \overline{CD}$

'LS51




positive logic:

$$1Y = \overline{(1A \cdot 1B \cdot 1C)} + (\overline{1D} \cdot \overline{1E} \cdot \overline{1F})$$

$$2Y = \overline{(2A \cdot 2B)} + (2C \cdot 2D)$$

†These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.  
Pin numbers shown are for D, J, N, and W packages.



### schematics

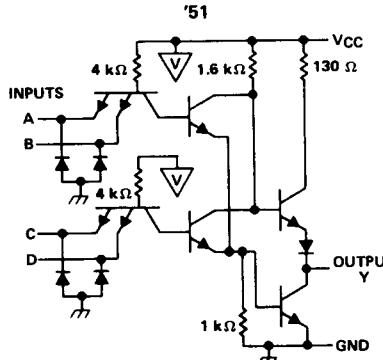

schematics

2

TTL Devices

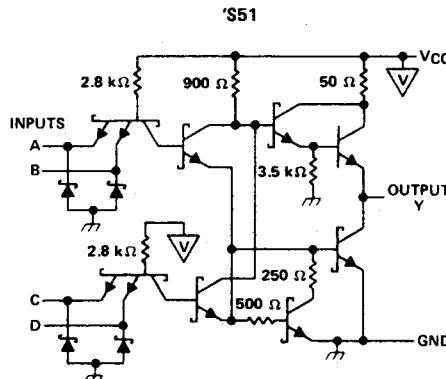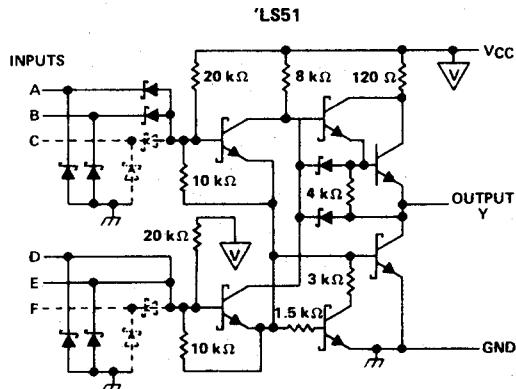

**absolute maximum ratings over operating free-air temperature range (unless otherwise noted)**

Supply voltage, V <sub>CC</sub> (See Note 1): '51, 'LS51, 'S51 . . . . .	7 V
Input voltage: '51, 'S51 . . . . .	5.5 V
'LS51 . . . . .	7 V
Operating free-air temperature range: SN54' . . . . .	-55°C to 125°C
SN74' . . . . .	0°C to 70°C
Storage temperature range . . . . .	-65°C to 150°C

NOTE 1: Voltage values are with respect to network ground terminal.

# SN5451, SN7451 AND-OR-INVERT GATES

## recommended operating conditions

	SN5451			SN7451			UNIT
	MIN	NOM	MAX	MIN	NOM	MAX	
V <sub>CC</sub> Supply voltage	4.5	5	5.5	4.75	5	5.25	V
V <sub>IH</sub> High-level input voltage	2			2			V
V <sub>IL</sub> Low-level input voltage				0.8			V
I <sub>OH</sub> High-level output current				-0.4			mA
I <sub>OL</sub> Low-level output current				16			mA
T <sub>A</sub> Operating free-air temperature	-55		125	0		70	°C

## electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS †	SN5451			SN7451			UNIT
		MIN	TYP‡	MAX	MIN	TYP‡	MAX	
V <sub>IK</sub>	V <sub>CC</sub> = MIN, I <sub>I</sub> = -12 mA				-1.5		-1.5	V
V <sub>OH</sub>	V <sub>CC</sub> = MIN, V <sub>IL</sub> = 0.8 V, I <sub>OH</sub> = -0.4 mA	2.4	3.4		2.4	3.4		V
V <sub>OL</sub>	V <sub>CC</sub> = MIN, V <sub>IH</sub> = 2 V, I <sub>OL</sub> = 16 mA	0.2	0.4		0.2	0.4		V
I <sub>I</sub>	V <sub>CC</sub> = MAX, V <sub>I</sub> = 5.5 V			1			1	mA
I <sub>IH</sub>	V <sub>CC</sub> = MAX, V <sub>I</sub> = 2.4 V			40			40	µA
I <sub>IL</sub>	V <sub>CC</sub> = MAX, V <sub>I</sub> = 0.4 V			-1.6			-1.6	mA
I <sub>OS§</sub>	V <sub>CC</sub> = MAX	-20	-55		-18		-55	mA
I <sub>CCH</sub>	V <sub>CC</sub> = MAX, V <sub>I</sub> = 0 V	4	8		4	8		mA
I <sub>CCL</sub>	V <sub>CC</sub> = MAX, See Note 2	7.4	14		7.4	14		mA

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C.

§ Not more than one output should be shorted at a time.

NOTE 2: All inputs of one AND gate at 4.5 V, all others at GND.

## switching characteristics, V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C (see note 3)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS		MIN	TYP	MAX	UNIT
			R <sub>L</sub> = 400 Ω,	C <sub>L</sub> = 15 pF				
t <sub>PLH</sub>	Any	Y			13	22		
t <sub>PHL</sub>					8	15		ns

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.

# SN54LS51, SN74LS51 AND-OR-INVERT GATES

## recommended operating conditions

	SN54LS51			SN74LS51			UNIT
	MIN	NOM	MAX	MIN	NOM	MAX	
$V_{CC}$ Supply voltage	4.5	5	5.5	4.75	5	5.25	V
$V_{IH}$ High-level input voltage		2			2		V
$V_{IL}$ Low-level input voltage			0.7			0.8	V
$I_{OH}$ High-level output current			-0.4			-0.4	mA
$I_{OL}$ Low-level output current			4			8	mA
$T_A$ Operating free-air temperature	-55		125	0		70	°C

## electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS <sup>†</sup>	SN54LS51			SN74LS51			UNIT
		MIN	TYP <sup>‡</sup>	MAX	MIN	TYP <sup>‡</sup>	MAX	
$V_{IK}$	$V_{CC} = \text{MIN}$ , $I_I = -18 \text{ mA}$			-1.5			-1.5	V
$V_{OH}$	$V_{CC} = \text{MIN}$ , $V_{IL} = \text{MAX}$ , $I_{OH} = -0.4 \text{ mA}$	2.5	3.4		2.7	3.4		V
$V_{OL}$	$V_{CC} = \text{MIN}$ , $V_{IH} = 2 \text{ V}$ , $I_{OL} = 4 \text{ mA}$	0.25	0.4		0.25	0.4		V
	$V_{CC} = \text{MIN}$ , $V_{IH} = 2 \text{ V}$ , $I_{OL} = 8 \text{ mA}$			0.35	0.5			
$I_I$	$V_{CC} = \text{MAX}$ , $V_I = 7 \text{ V}$		0.1			0.1		mA
$I_{IH}$	$V_{CC} = \text{MAX}$ , $V_I = 2.7 \text{ V}$		20			20		μA
$I_{IL}$	$V_{CC} = \text{MAX}$ , $V_I = 0.4 \text{ V}$		-0.4			-0.4		mA
$I_{OS\$}$	$V_{CC} = \text{MAX}$	-20	-100		-20	-100		mA
$I_{CCH}$	$V_{CC} = \text{MAX}$ , $V_I = 0 \text{ V}$	0.8	1.6		0.8	1.6		mA
$I_{CCL}$	$V_{CC} = \text{MAX}$ , See Note 2	1.4	2.8		1.4	2.8		mA

<sup>†</sup> For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

<sup>‡</sup> All typical values are at  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^\circ\text{C}$ .

§ Not more than one output should be shorted at a time, and the duration of the short-circuit should not exceed one second.

NOTE 2: All inputs of one AND gate at 4.5 V, all others at GND.

## switching characteristics, $V_{CC} = 5 \text{ V}$ , $T_A = 25^\circ\text{C}$ (see note 3)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{PLH}$	Any	Y	$R_L = 2 \text{ k}\Omega$ , $C_L = 15 \text{ pF}$	12	20		ns
				12.5	20		ns

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.

2

TTL Devices

# SN54S51, SN74S51 AND-OR-INVERT GATES

## recommended operating conditions

	SN54S51	SN74S51			UNIT
		MIN	NOM	MAX	
V <sub>CC</sub> Supply voltage	4.5	5	5.5	4.75	5 5.25
V <sub>IH</sub> High-level input voltage	2			2	V
V <sub>IL</sub> Low-level input voltage			0.8		V
I <sub>OH</sub> High-level output current			-1		mA
I <sub>OL</sub> Low-level output current			20		mA
T <sub>A</sub> Operating free-air temperature	-55	125	0	70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS †	SN54S51			SN74S51			UNIT
		MIN	TYP ‡	MAX	MIN	TYP ‡	MAX	
V <sub>IK</sub>	V <sub>CC</sub> = MIN, I <sub>I</sub> = -18 mA			-1.2			-1.2	V
V <sub>OH</sub>	V <sub>CC</sub> = MIN, V <sub>IL</sub> = 0.8 V, I <sub>OH</sub> = -1 mA	2.5	3.4		2.7	3.4		V
V <sub>OL</sub>	V <sub>CC</sub> = MIN, V <sub>IH</sub> = 2 V, I <sub>OL</sub> = 20 mA			0.5			0.5	V
I <sub>I</sub>	V <sub>CC</sub> = MAX, V <sub>I</sub> = 5.5 V			1			1	mA
I <sub>IH</sub>	V <sub>CC</sub> = MAX, V <sub>I</sub> = 2.7 V			50			50	µA
I <sub>IL</sub>	V <sub>CC</sub> = MAX, V <sub>I</sub> = 0.5 V			-2			-2	mA
I <sub>OS</sub> §	V <sub>CC</sub> = MAX	-40		-100	-40		-100	mA
I <sub>CCH</sub>	V <sub>CC</sub> = MAX, V <sub>I</sub> = 0 V			8.2	17.8		8.2	17.8
I <sub>CCL</sub>	V <sub>CC</sub> = MAX, See Note 2			13.6	22		13.6	mA

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C.

§ Not more than one output should be shorted at a time, and the duration of the short-circuit should not exceed one second.

NOTE 2: All inputs of one AND gate at 4.5 V, all others at GND.

switching characteristics, V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C (see note 3)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t <sub>PLH</sub>	Any	Y	R <sub>L</sub> = 280 Ω, C <sub>L</sub> = 15 pF	3.5	5.5	ns	
t <sub>PHL</sub>			R <sub>L</sub> = 280 Ω, C <sub>L</sub> = 50 pF	3.5	5.5	ns	
t <sub>PLH</sub>		Y	R <sub>L</sub> = 280 Ω, C <sub>L</sub> = 50 pF	5		ns	
t <sub>PHL</sub>				5.5		ns	

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.