




HOME PRODUCTS INDUSTRIES RESOURCES ABOUT PANCON CONTACT US

Search

PANCON CONNECTORS

Part Number: CE100F22-3-D

Agency Cert	cULus
Product Family	Pancon Connectors
Product Name	MAS-CON® .100" IDC Wire to Board Connector System
Brand Name	End Connectors - Non-Polarized
Rohs Status	COMPLIANT
Comp Type	Socket
Term Method	IDC
Wire Awg	22 awg
Contact Material	Copper Alloy
Contact Plating	Bright Tin over Nickel
Housing Material	6/6 Nylon
Dielectric Voltage	2.0 KVAC Min.
Flammability	UL 94V-2
Insulation Resistance	5,000 Megohms Min
Mating Froce	1.17lbs/circuit max
Unmatting Force	0.3lbs/circuit
Packaging Type	Bag
Standard Pack Size	500
Product Specification	PS 1003
Sales Drawing	KA-10036.pdf
Stackable	YES
Polarized To Mating Part	NO
Lock To Mating Part	NO
Polarization	NO
Breakaway	NO
Current Max Per Contact	4.0 amps
Voltage Max	300 volts
Wire Size Awg	22
Num Rows	1
Pitch Mating	.100"
Pitch Termination	.100"
Spacing	.100"
Gender	Female

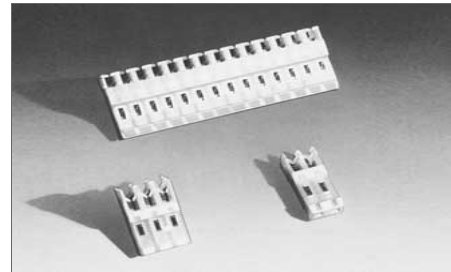

[Request Quote](#)

[Request Sample](#)

[View PDF](#)

[Compliance Specifications](#)

Pancon Corporation

350 Revolutionary Drive
East Taunton, MA 02718
800-342-6472 (toll-free)
781-297-6000

info@panconcorp.com

Ark-Les Connectors

Flag
Quick Connects
Rings and Spades
Splices
Stationary

Pancon Connectors

Cross Reference
HI-CON Products
I/O Connectors
Jumper Switches
LAT-CON Products

Paktron Capacitors

Metallized PET
Metallized PET-SMD
Multilayer Polymer
RC Snubber

Pancon MIE

Insert Molded Connectors
Insert Molded Housings
Insert Molded Modules
Over Molded Leadframes

Pancon S3

Stamped Terminals
Stamped Contacts
Compliant Pins
Bandolier Pins



[Site Map](#) | All content copyright 2013 Pancon Corporation