


Female Header for 0,46 mm Square Pins 1,27 mm

Series

184

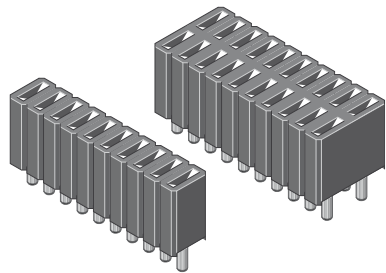

| | |
|-------------------------|--|
| Rated current | 1,0 A |
| Rated voltage | 100 V _{RMS} / V _{DC} |
| Withstand voltage | 300 V _{RMS} for one minute |
| Material contact | Phosphor bronze |
| Material insulator | High temp. thermoplast UL94V-0 |
| Operating temperature | -40°C to +105°C |
| Max. processing temper. | 260°C for 10 seconds |


| | |
|-----------------|--------------------------------------|
| pitch | 1,27 |
| termination | |
| mating pin size | <input type="checkbox"/> 0,46 |
| max. pincount | 040 / 050 |

All dimensions in mm.



Variation

PCB Layout


Product group
4

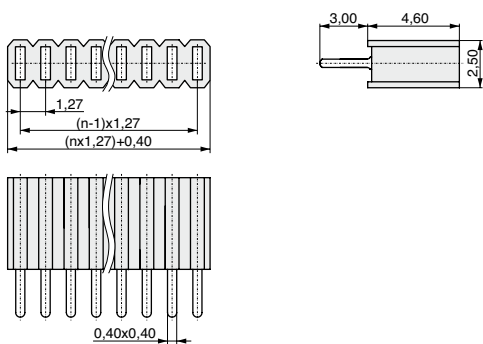

1

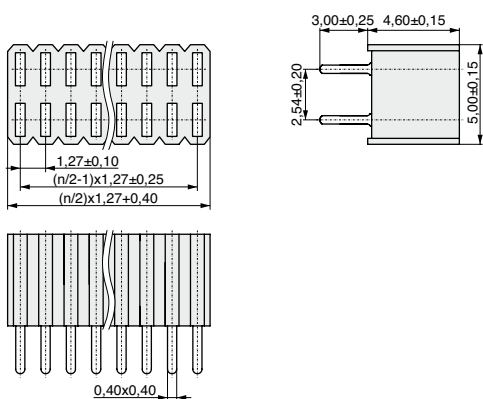

2



Plating: T = Sn
F = Au
S = Sel. Au

Packaging: T = Tube

* No. of contacts:
Variation 1 = 003 - 040
Variation 2 = 004 - 080

Variation (1,2)

No. of contacts *
(003,... - 080)

Plating contact (T,F,S)

Packaging



www.mpe-connector.de

Order code:

184 - 2 - 222 - 0 - N 2 X - BT 0

CS031212_V4

MPE-Garry GmbH • Schäßlerstraße 13 • 87629 Füssen • Germany • Phone: +49 (0) 83 62 / 91 56-0 • Fax: +49 (0) 83 62 / 91 56-500 • Email: vk@mpe-connector.de • www.mpe-connector.de