



DATA SHEET

SD820YT~SD8150YT

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS


VOLTAGE	20 to 150 Volts	CURRENT	8 Amperes	TO-251AB	Unit : inch (mm)
----------------	------------------------	----------------	------------------	-----------------	-------------------------

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Low power loss, High efficiency
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- Pb free product are available : 99% Sn above can meet Rohs environment substance directive request

MECHANICAL DATA

Case: D PAK/TO-251AB molded plastic
 Terminals: Solder plated, solderable per MIL-STD-202G, Method 2026
 Polarity: As marking
 Standard packaging: 16mm tape (EIA-481)
 Weight: 0.015 ounces, 0.4grams.

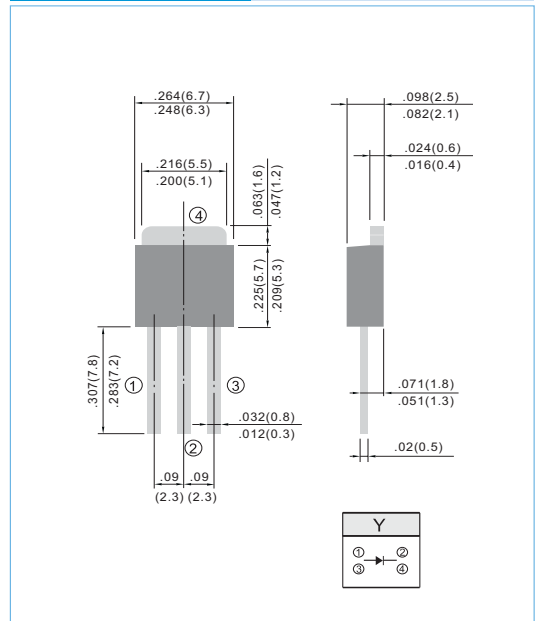

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

PARAMETER	SYMBOL	SD820YT	SD830YT	SD840YT	SD850YT	SD860YT	SD880YT	SD8100YT	SD8150YT	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	80	100	150	V
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	56	70	105	V
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	80	100	150	V
Maximum Average Forward Current .375"(9.5mm) lead length at $T_c = 85^\circ C$	I_{AV}	8								A
Peak Forward Surge Current :8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I_{FSM}	85								A
Maximum Forward Voltage at 8.0A	V_F	0.55		0.75		0.85		0.92		V
Maximum DC Reverse Current $T_J = 25^\circ C$ at Rated DC Blocking Voltage $T_J = 100^\circ C$	I_R	0.5 20								mA
Typical Thermal Resistance	$R_{\theta JC}$	5								$^\circ C / W$
Operating Junction Temperature Rang	T_J	-50 to +125								$^\circ C$
Storage Temperature Rang	T_J, T_{STG}	-50 to +150								$^\circ C$



RATING AND CHARACTERISTIC CURVES

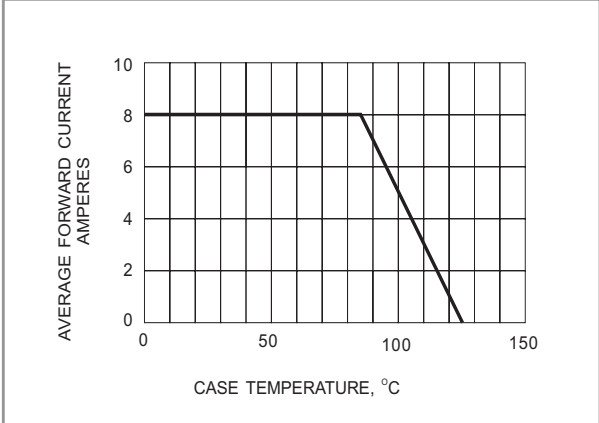


Fig.1- FORWARD CURRENT DERATING CURVE

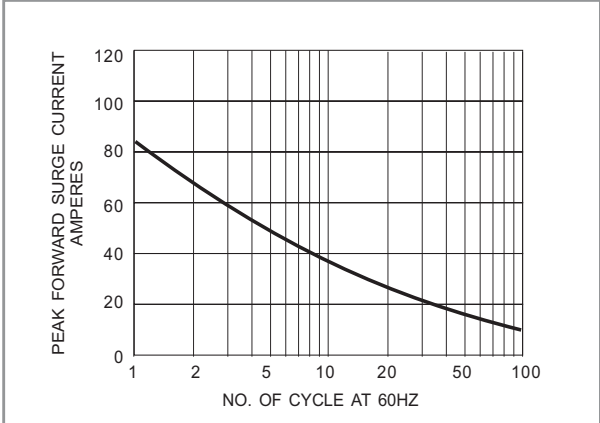


Fig.2- MAXIMUM NON - REPETITIVE SURGE CURRENT

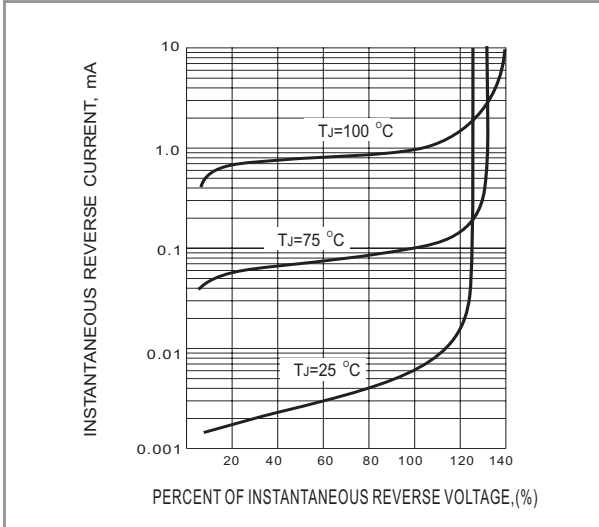


Fig.3- TYPICAL REVERSE CHARACTERISTICS

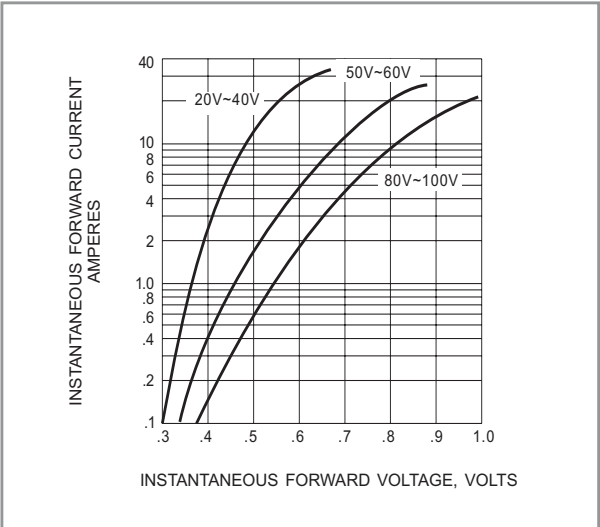


Fig.4- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS