


2532 SERIES

FFC/FPC CONNECTOR 1.25mm(0.049")

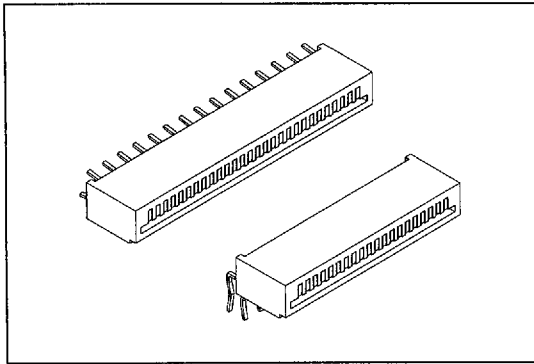

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Plating: Tin plated.

Electrical Characteristics:

Current Rating: 1 AMP.



Insulator Resistance: 5000M Ω min. at DC 500V.

Contact Resistance: 20m Ω max. at DC 100mA.


Operating Temperature: -55°C ~ +105°C.

Features:

- * Size 3 through 36 available.
- * Straight & right angle, Non-ZIF.
- * For 0.30mm(0.0118") thick FFC/FPC.

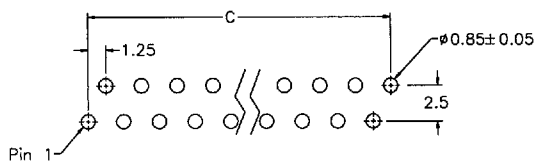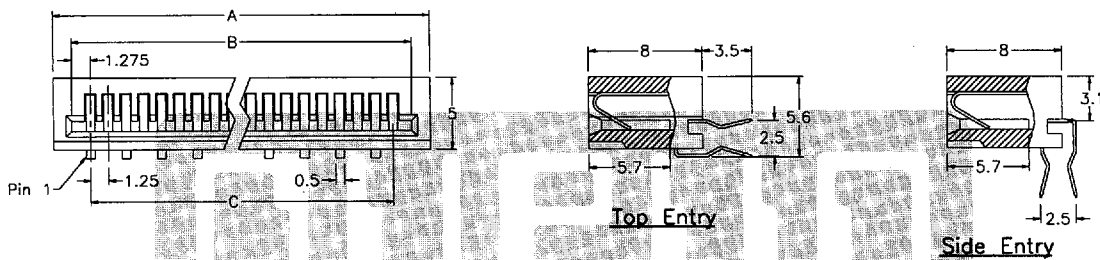

P.C. Board Layout



FFC/FPC Dimension
Thickness 0.3±0.05mm

Position	3 Thru 36
Dimension	
A	(No. of Positions X 1.25)+3.4
B	(No. of Positions X 1.25)+1.3
C	(No. of Positions X 1.25)

Ordering information

2532-
Series

36
No. of
Pin Count

T
T: Tin Plated

S
S: Top Entry (Straight)
R: Side Entry (Right Angle)