
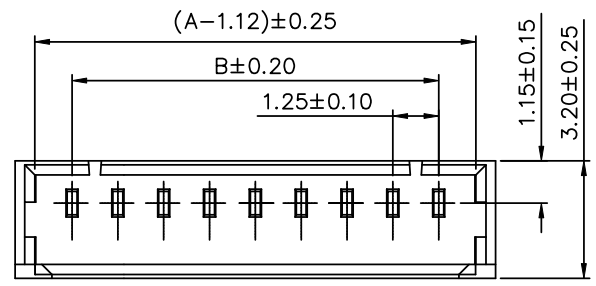
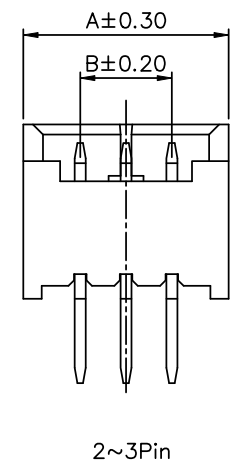

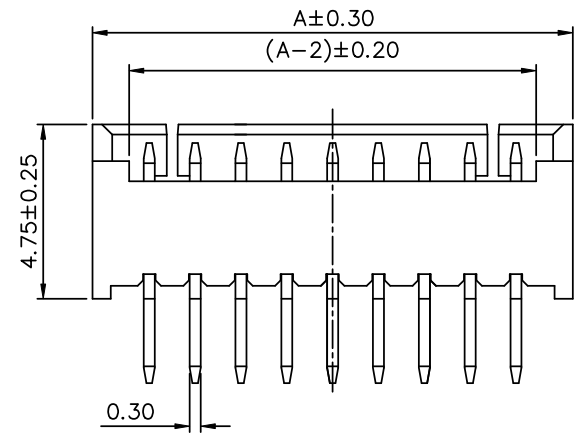


SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 125V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 500 Megohms Min.
 Withstanding Voltage: 500V AC/Minute
 Insulator: PA66+30%GF,UL94V-0
 Pin: Brass,
 Underplated: Nickel
 Whole Tin Plated
 RoHS Compliant

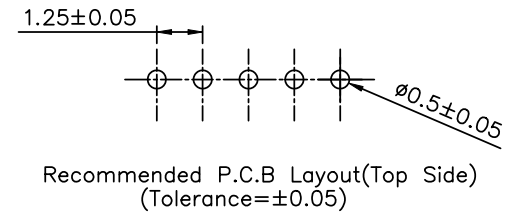

Pin	A	B
2	4.25	1.25
3	5.50	2.50
4	6.75	3.75
5	8.00	5.00
6	9.25	6.25
7	10.50	7.50
8	11.75	8.75
9	13.00	10.00
10	14.25	11.25
11	15.50	12.50
12	16.75	13.75
13	18.00	15.00
14	19.25	16.25
15	20.50	17.50
16	21.75	18.75

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ~10 ±0.15 20~30 ±0.30 30~ ±0.50 ANG ±2°
PART No. FHXXD-H		MEI		
DRAWING No. FHXXD-H		CHECKED BY HZF		
		DRAWING BY PEGA		
SCALE	NONE	REV.	BO	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ BO		NEW RELEASE	HZF	12/05/2006