



MMDT2907A

DUAL PNP GENERAL PURPOSE SWITCHING TRANSISTOR

VOLTAGE 60 Volts **POWER** 150 mW

FEATURES

- PNP epitaxial silicon, planar design
- Collector-emitter voltage $V_{CE} = -60V$
- Collector current $I_C = -600mA$
- $V_{CE(sat)} = -0.2V$ at $I_C = -600mA$, $V_{BE} = -0.7V$
- $V_{BE(sat)} = -0.7V$ at $I_C = -600mA$, $V_{CE} = -5V$

MECHANICAL DATA

- Case: SOT-363
- Terminals : Solderable per MIL-STD-750, Method 2026
- Apporx. Weight: 0.0002 ounce, 0.006 gram
- Device Marking : M7A





Fig.53

SOT-363 Unit: inch (mm)

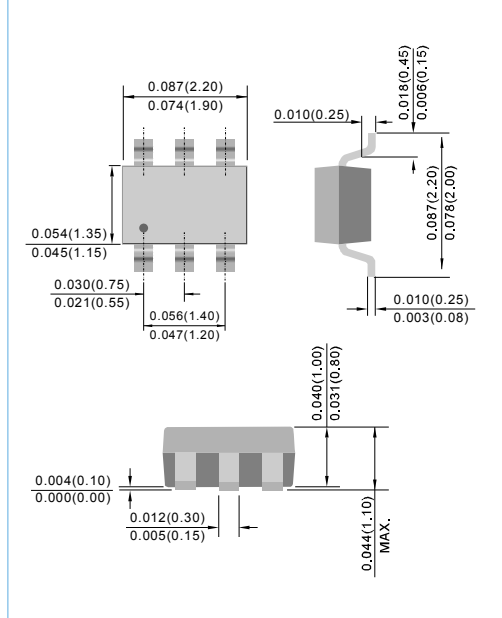

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Units
Collector-Emitter Voltage	V_{CEO}	-60	V
Collector-Base Voltage	V_{CBO}	-60	V
Emitter-Base Voltage	V_{EBO}	-5.0	V
Collector Current-Continuous	I_C	-600	mA

THERMAL CHARACTERISTICS

Parameter	Symbol	Value	Units
Max Power Dissipation (Note 1)	P_{TOT}	150	mW
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	830	$^{\circ}C / W$
Storage Temperature	T_{STG}	-55 to +150	$^{\circ}C$
Junction Temperature	T_J	-55 to +150	$^{\circ}C$

Note 1 : Transistor mounted on FR-5 board 1.0 x 0.75 x 0.062 in.



MMDT2907A

ELECTRICAL CHARACTERISTICS $(T_J=25^\circ\text{C}$, unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Units
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=-10\text{mA}, I_B=0$	-60	-	-	V
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=-10\mu\text{A}, I_E=0$	-60	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=-10\mu\text{A}, I_C=0$	-5.0	-	-	V
Base Cutoff Current	I_{BL}	$V_{CE}=-30\text{V}, V_{EB}=-0.5\text{V}$	-	-	-50	nA
Collector Cutoff Current	I_{CEX}	$V_{CE}=-30\text{V}, V_{EB}=-0.5\text{V}$	-	-	-50	nA
	I_{CBO}	$V_{CE}=-50\text{V}, I_E=0$	-	-	-10	nA
		$V_{CE}=-50\text{V}, I_E=0$ $T_J=125^\circ\text{C}$	-	-	-10	μA
DC Current Gain	h_{FE}	$I_C=-0.1\text{mA}, V_{CE}=-10\text{V}$ $I_C=-1.0\text{mA}, V_{CE}=-10\text{V}$ $I_C=-10\text{mA}, V_{CE}=-10\text{V}$ $I_C=-150\text{mA}, V_{CE}=-10\text{V}$ $I_C=-500\text{mA}, V_{CE}=-10\text{V}$	75 100 100 100 50	- - - - -	- - - 300 -	-
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=-150\text{mA}, I_B=-15\text{mA}$ $I_C=-500\text{mA}, I_B=-50\text{mA}$	- -	- -	-0.4 -1.6	V
Base-Emitter Saturation Voltage	$V_{BE(SAT)}$	$I_C=-150\text{mA}, I_B=-15\text{mA}$ $I_C=-500\text{mA}, I_B=-50\text{mA}$	- -	- -	-1.3 -2.6	V
Collector-Base Capacitance	C_{CBO}	$V_{CB}=-10\text{V}, I_E=0, f=1\text{MHz}$	-	-	8.0	pF
Emitter-Base Capacitance	C_{EBO}	$V_{CB}=-2\text{V}, I_C=0, f=1\text{MHz}$	-	-	30	pF
Current Gain-Bandwidth Product	F_T	$I_C=-50\text{mA}, V_{CE}=-20\text{V}, f=100\text{MHz}$	200	-	-	MHz
Turn-On Time	t_{on}	$V_{CC}=-30\text{V}, V_{BE}=-0.5\text{V}, I_C=-150\text{mA}, I_B=-15\text{mA}$	-	-	45	ns
Delay Time	t_d	$V_{CC}=-30\text{V}, V_{BE}=-0.5\text{V}, I_C=-150\text{mA}, I_B=-15\text{mA}$	-	-	10	ns
Rise Time	t_r	$V_{CC}=-30\text{V}, V_{BE}=-0.5\text{V}, I_C=-150\text{mA}, I_B=-15\text{mA}$	-	-	40	ns
Turn-Off Time	t_{off}	$V_{CC}=-6\text{V}, I_C=-150\text{mA}, I_{B1}=I_{B2}=-15\text{mA}$	-	-	100	ns
Storage Time	t_s	$V_{CC}=-6\text{V}, I_C=-150\text{mA}, I_{B1}=I_{B2}=-15\text{mA}$	-	-	80	ns
Fall Time	t_f	$V_{CC}=-6\text{V}, I_C=-150\text{mA}, I_{B1}=I_{B2}=-15\text{mA}$	-	-	30	ns



MMDT2907A

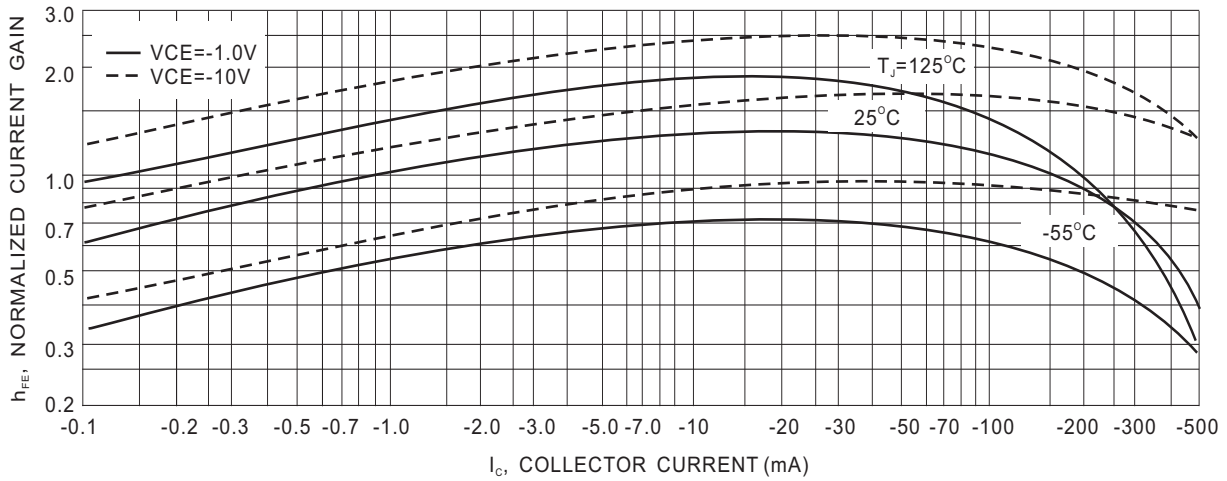


Fig.1-DC Current Gain

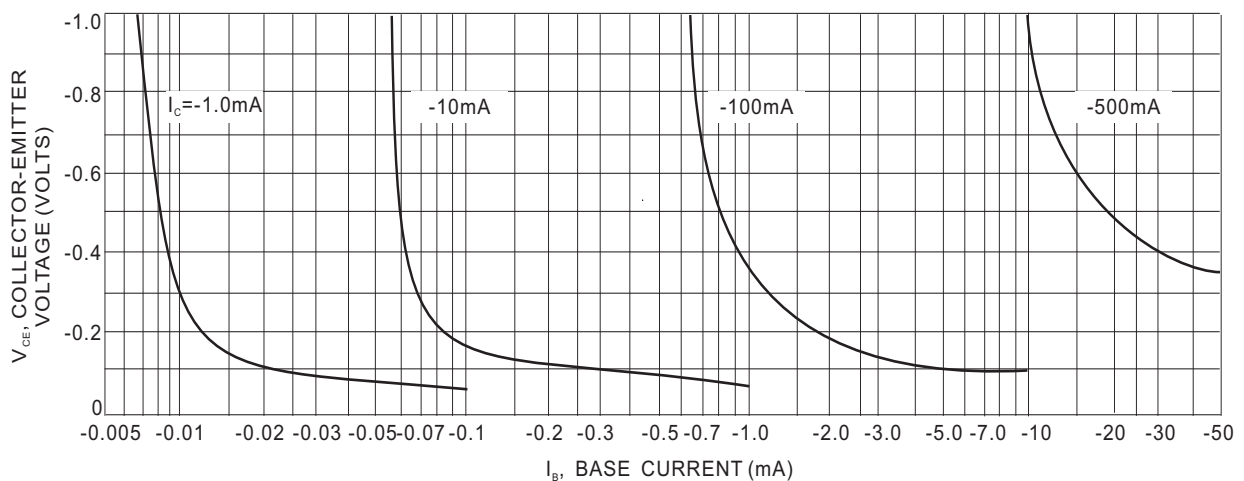


Fig.2-Collector Saturation Region

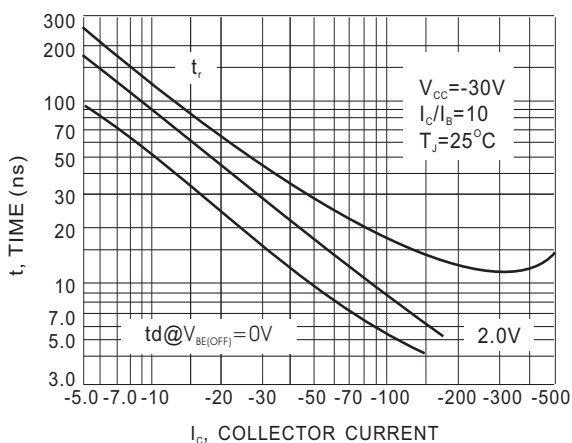


Fig.3-Turn-On Time

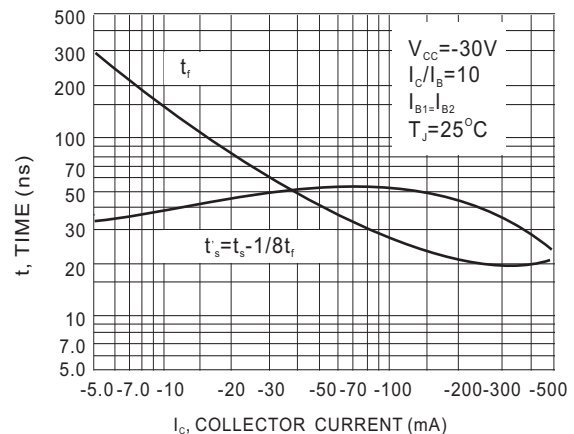


Fig.4-Turn-Off Time



MMDT2907A

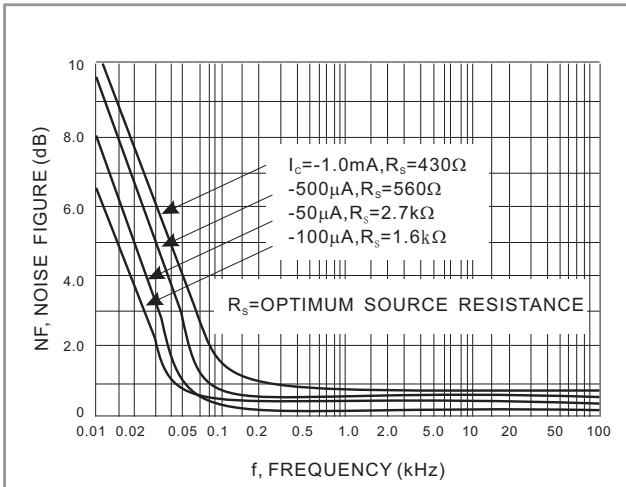


Fig.5-Frequency Effects

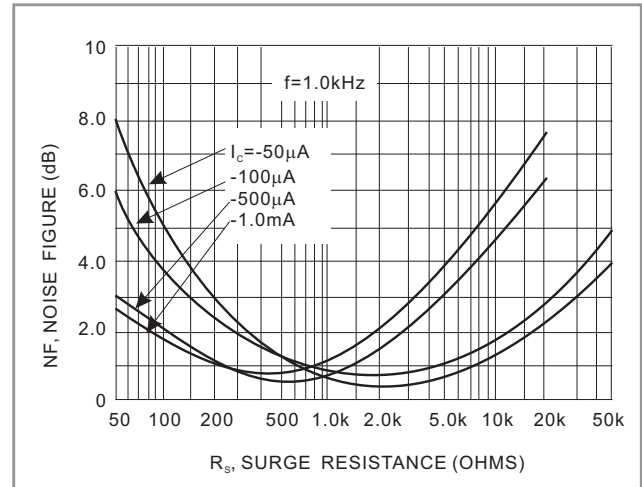


Fig.6-Source Resistance Effects

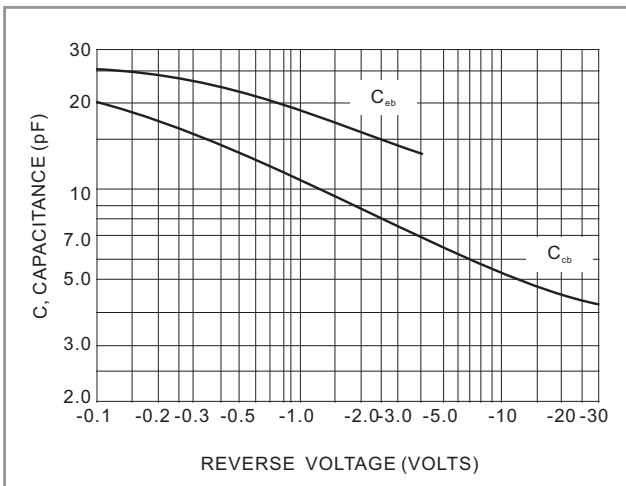


Fig.7-Capacitances

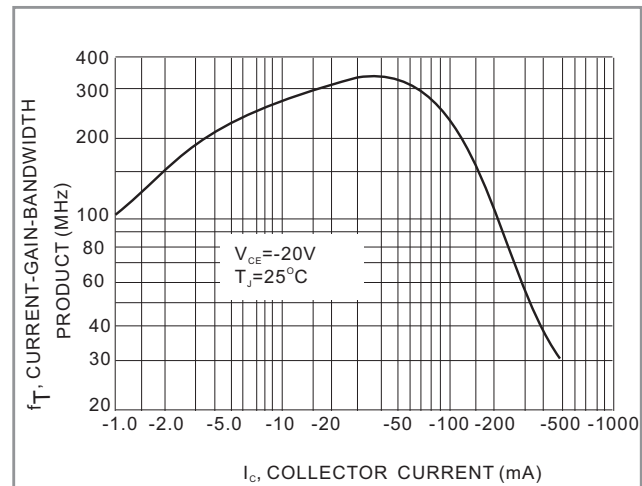


Fig.8-Current-Gain-Bandwidth Product

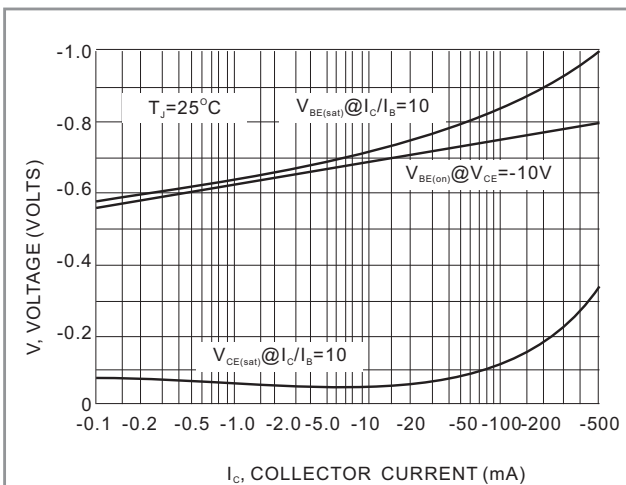


Fig.9-On Voltage


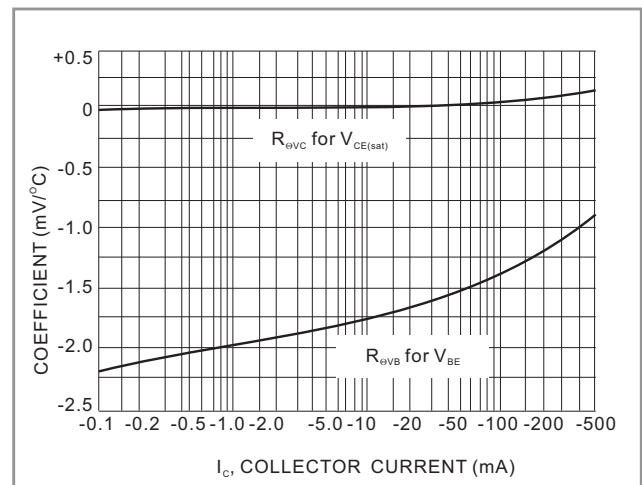


Fig.10-Temperature Coefficients



MMDT2907A

MOUNTING PAD LAYOUT

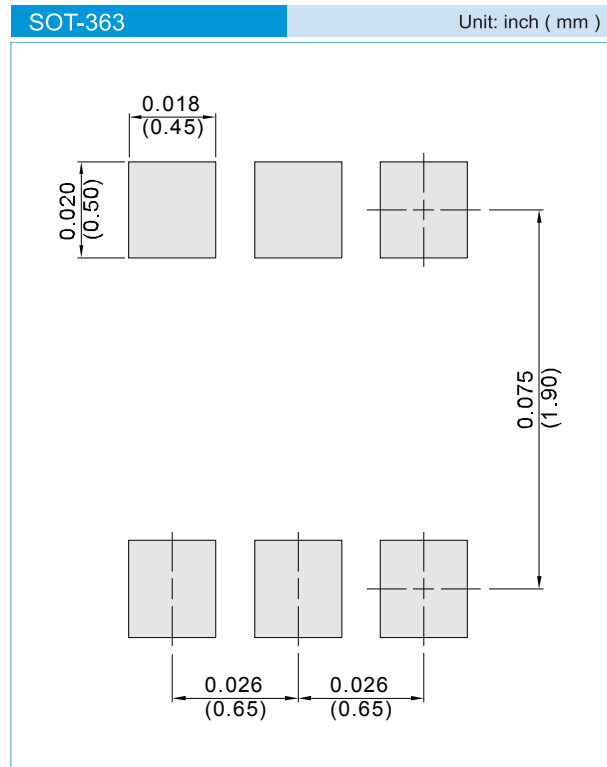

ORDER INFORMATION

- Packing information
T/R - 10K per 13" plastic Reel
T/R - 3K per 7" plastic Reel



MMDT2907A


Part No_packing code_Version

T T ÖVGJĒ Ā R1_00001

MMDT2907A_R2_00001

For example :

RB500V-40_R2_00001

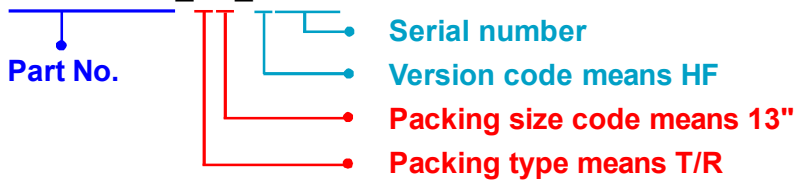

Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



MMDT2907A

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.