


### SPECIFICATIONS

Current Rating: 2A AC,DC  
 Voltage Rating: 125V AC,DC  
 Temperature Range:  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$   
 Contact Resistance: 20m $\Omega$  Max  
 Insulation Resistance: 1000M $\Omega$  Min  
 Withstanding Voltage: 500V AC/minute  
 Material: Nylon 66,UL94V-0  
 Color: Natural(White)

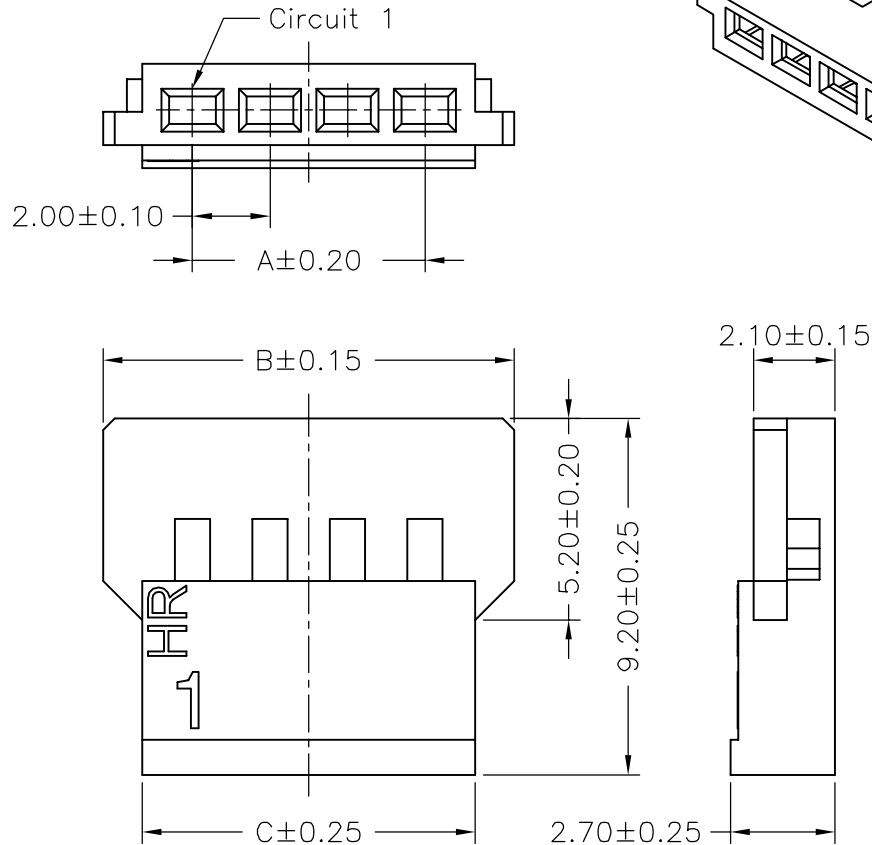

### Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
C2003HF-02P	2.00	6.60	4.60
C2003HF-03P	4.00	8.60	6.60
C2003HF-04P	6.00	10.60	8.60
C2003HF-05P	8.00	12.60	10.60
C2003HF-06P	10.00	14.60	12.60
C2003HF-07P	12.00	16.60	14.60
C2003HF-08P	14.00	18.60	16.60
C2003HF-09P	16.00	20.60	18.60
C2003HF-10P	18.00	22.60	20.60
C2003HF-11P	20.00	24.60	22.60
C2003HF-13P	24.00	28.60	26.60

				JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.		
		UNIT	SCALE	SHEET	TITLE:	
		mm		1 of 1	2.00mm PITCH HOUSING-RECEPTACLE	
		DRAWN BY		APPROVED BY		
		董正一		董正一		
		2001.02.01		2001.02.01		
B2	REVISE	2007.03.22	GENERAL TOLERANCE		DRAW NO. : C2003HF-XP	
B1	REVISE	2006.05.16	X. X±0.25	ANGLE±		
B0	NEW RELEASE	2005.12.13	X. XX±0.15			
REV.	DESCRIPTION	DATE	X. XXX±0.05			
					REV. B2	