

# CONNECTORS MANUFACTURER






## Female Header 2.54mm 1 Row H=3.55mm Dual Entry

### Specifications

Current Rate:3 AMP  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:20mΩ Max.  
 Dielectric Voltage:1000V AC for one minute  
 Operation Temperature:-40°C to +105°C




### Material

Insulator:Polyester,UL 94V-0  
 ©Standard:Nylon 6T  
 Terminal:Copper Alloy  
 Plating:Gold Plated

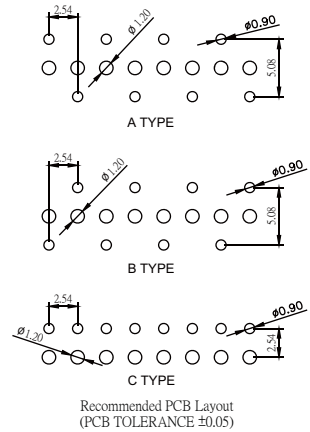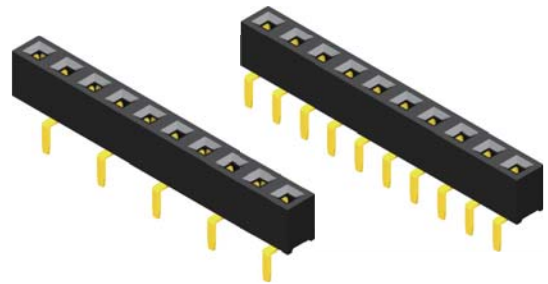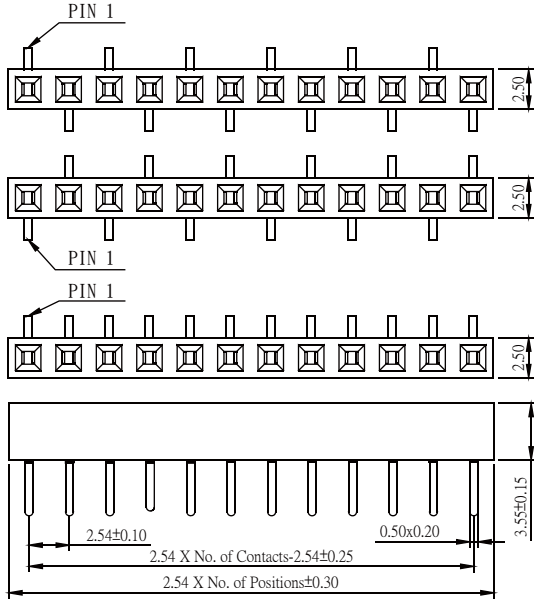


Part No.:PS1B35-1XX-U

## Female Header 2.54mm 2 Row H=3.55mm Dual Entry

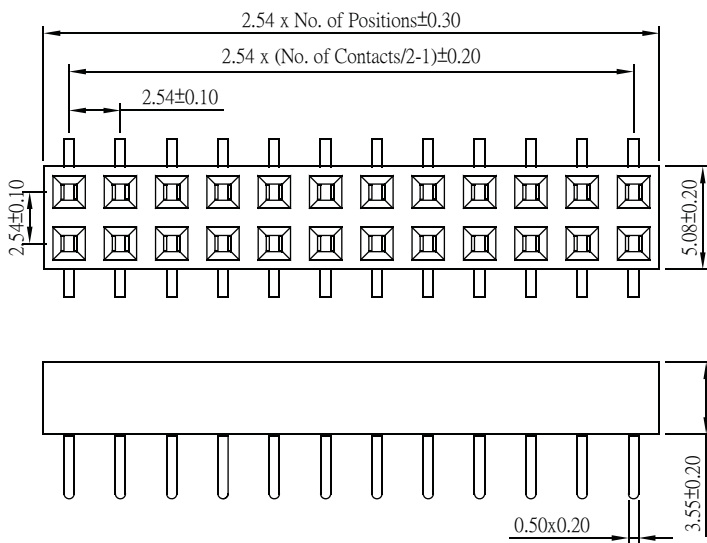

Part No.:PS1B35-2XX-U

## ORDER INFORMATION

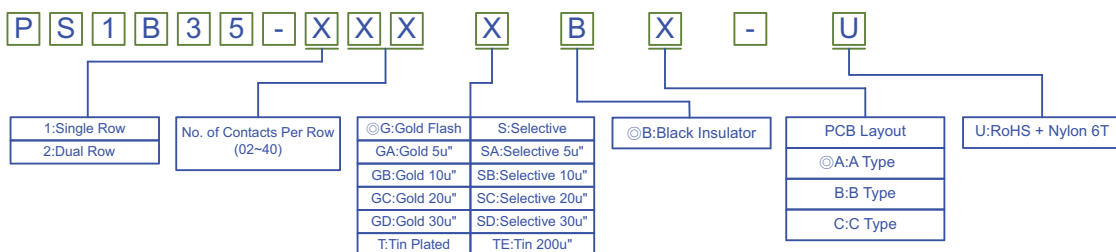

©Standard Recommended

2-122

www.amtek-co.com.tw

Female Header 2.54mm

RoHS

CONNECTORS MANUFACTURE