

2.0mm SINGLE ROW HEADER STRAIGHT P.C.B. MOUNT TYPE

EASY BEND & BREAK TO REQUIRED NUMBER OF PINS




200110MS Series

Mates With SUYIN 200123, 200130, 200160 Series

Specifications:

- **2-40 Circuits**
- **Insulator Material** : Black High Temp . Plastic
- **Operating Temp. Range** : -40°C to +105°C
- **Terminal Material** : Brass 65/35
- **Plating** : Contact-Selective Gold Plated
or Full Gold Plated
- **Max. Current Rating** : 1.5A
- **Voltage Rating** : 150V AC
- **Dielectric Strength** : 500V (Min. 60 Seconds)

2.0
mm

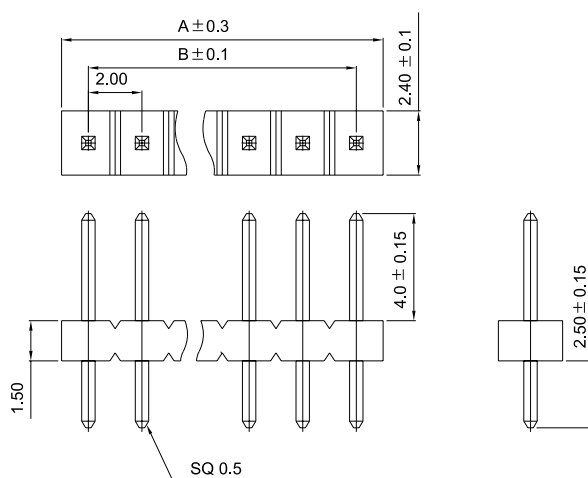

Order Information

200110MS□□□□00ZU
1 2 3 4 5

1. 'S': Straight DIP Type
2. No. of Pins
3. Plating
4. Color 'Z': Black
5. Package

'U': Tube Package Without CAP

Reference Page 11

Dimensional Information

SUYIN P/NO.	DIM.A	DIM.B	SUYIN P/NO.	DIM.A	DIM.B
200110MS002□□00ZU	4.3	2.0	200110MS022□□00ZU	44.3	42.0
200110MS003□□00ZU	6.3	4.0	200110MS023□□00ZU	46.3	44.0
200110MS004□□00ZU	8.3	6.0	200110MS024□□00ZU	48.3	46.0
200110MS005□□00ZU	10.3	8.0	200110MS025□□00ZU	50.3	48.0
200110MS006□□00ZU	12.3	10.0	200110MS026□□00ZU	52.3	50.0
200110MS007□□00ZU	14.3	12.0	200110MS027□□00ZU	54.3	52.0
200110MS008□□00ZU	16.3	14.0	200110MS028□□00ZU	56.3	54.0
200110MS009□□00ZU	18.3	16.0	200110MS029□□00ZU	58.3	56.0
200110MS010□□00ZU	20.3	18.0	200110MS030□□00ZU	60.3	58.0
200110MS011□□00ZU	22.3	20.0	200110MS031□□00ZU	62.3	60.0
200110MS012□□00ZU	24.3	22.0	200110MS032□□00ZU	64.3	62.0
200110MS013□□00ZU	26.3	24.0	200110MS033□□00ZU	66.3	64.0
200110MS014□□00ZU	28.3	26.0	200110MS034□□00ZU	68.3	66.0
200110MS015□□00ZU	30.3	28.0	200110MS035□□00ZU	70.3	68.0
200110MS016□□00ZU	32.3	30.0	200110MS036□□00ZU	72.3	70.0
200110MS017□□00ZU	34.3	32.0	200110MS037□□00ZU	74.3	72.0
200110MS018□□00ZU	36.3	34.0	200110MS038□□00ZU	76.3	74.0
200110MS019□□00ZU	38.3	36.0	200110MS039□□00ZU	78.3	76.0
200110MS020□□00ZU	40.3	38.0	200110MS040□□00ZU	80.3	78.0
200110MS021□□00ZU	42.3	40.0			

Recommended P.C.B Layout

