

DUAL ROW CRIMP HOUSING




2350 SERIES. 2.54mm(0.100"). With Locking Ramp.

Features

- Available in 4 through 40 circuits
- Insulator Material: PBT, UL 94V-0
- Polarised with locking ramp
- Accepts 2351 series crimp terminal
- Mates with 2347, 2348 series connectors and dual row headers without polarisation pitch 2.54mm

Dimensional Information

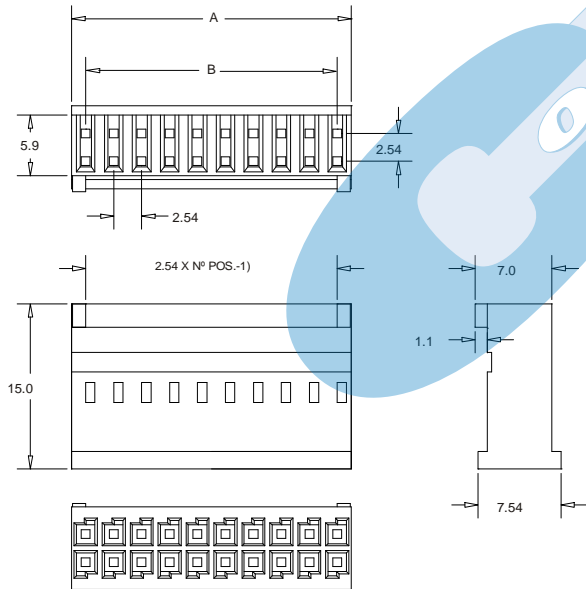

Ordering and Dimensional Information

Circuit Size	Part Number	Dimensions	
		A	B
04	2350-2041	5,08(0,200)	2,54(0,100)
06	2350-2061	7,62(0,300)	5,08(0,200)
08	2350-2081	10,16(0,400)	7,62(0,300)
10	2350-2101	12,70(0,500)	10,16(0,400)
12	2350-2121	15,24(0,600)	12,70(0,500)
14	2350-2141	17,78(0,700)	15,24(0,600)
16	2350-2161	20,32(0,800)	17,78(0,700)
18	2350-2181	22,86(0,900)	20,32(0,800)
20	2350-2201	25,40(1,000)	22,86(0,900)
22	2350-2221	27,94(1,100)	25,40(1,000)
24	2350-2241	30,48(1,200)	27,94(1,100)
26	2350-2261	33,02(1,300)	30,48(1,200)
28	2350-2281	35,56(1,400)	33,02(1,300)
30	2350-2301	38,10(1,500)	35,56(1,400)
32	2350-2321	40,64(1,600)	38,10(1,500)
34	2350-2341	43,18(1,700)	40,64(1,600)
36	2350-2361	45,72(1,800)	43,18(1,700)
38	2350-2381	48,26(1,900)	45,72(1,800)
40	2350-2401	50,80(2,000)	48,26(1,900)