

200BX BOX HEADER CONNECTOR SYSTEM




.079"x.079" (2.0x2.0mm) pitch

MATERIAL : PBT+30% GF UL 94V-0
 BRASS GOLD FLASH
 CURRENT RATING : 1A AC,DC
 VOLTAGE RATING : 150V AC,DC
 CONTACT RESISTANCE : 20m δ MAX
 INSULATION RESISTANCE : 100M δ MIN
 WITHSTANDING VOLTAGE : 250V AC/MINUTE
 TEMPERATURE RANGE : -25°C TO +85°C
 SQ PIN SIZE : 0.5MM
 PC BOARD HOLE : 0.7MM DIA
 PC BOARD THICKNESS : 1.2.1.6MM

PART NO :
 200BX-Vxx (STRAIGHT TYPE)
 200BX-Rxx (R/A TYPE)
 xx = 08, 10, 12, 14, 16, 20, 22, 24, 26,
 30, 32, 34, 36, 40, 44, 50, 60, 68

200BX-V SERIES

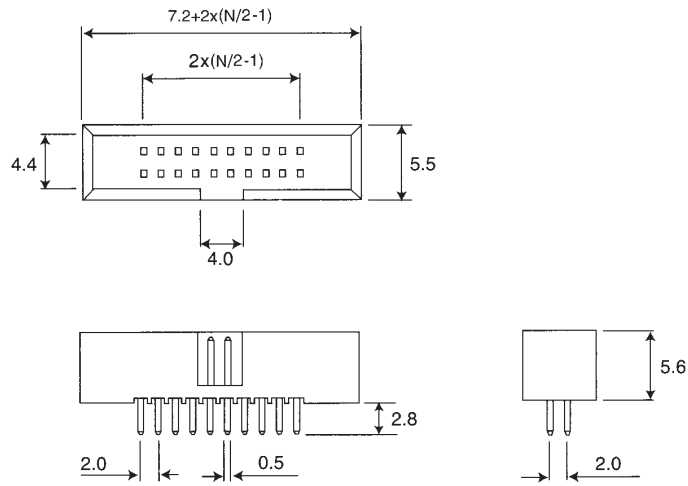

200BX-R SERIES

