V1.1

REVISIONS							
SYM	DISCRIPTION	DATE	APPROVED	SYM	DISCRIPTION	DATE	APPROVED
△				△			
△				△			

**CUSTOMER DRAWING FOR REFERANCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!



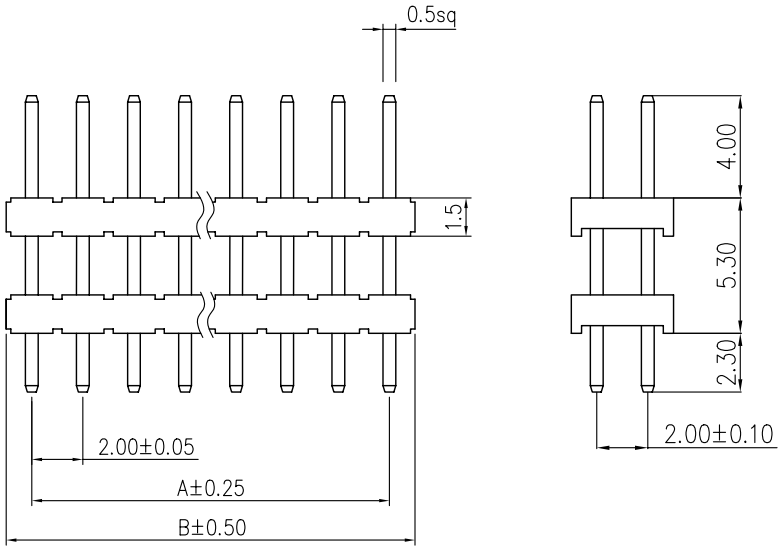

SPECIFICATIONS
CURRENT RATING : 1 AMPS.
INSULATOR RESISTANCE : 5000MΩ MIN.
DIELECTRIC WITHSTANDING : AC 500V/ MINUTE
OPERATING TEMPERATURE : −40℃~+105℃.
CONTACT MATERIAL : BRASS
INSULATOR MATERIAL:
POLYESTER: UL94V−0
COLOR: BLACK
FINISH :
GOLD, TIN OR DUPLEX PLOTED

ORDER INFORMATION:
SPHb1160−PXX02Gf−0530−0400
SPH: STACK PIN HEADER
b: 2.0mmX2.0mm PITCH
1160: OVERALL PIN LENGTH, 11.60mm
P: TERMINAL TYPE:STRAIGH TYPE
XX: NUMBER PINS PER ROW
02: TWO ROWS
Gf: GOLD FLASH
0530: STACKER HEIGHT, 5.30mm
0400: POST HEIGHT, 04.00mm

MODEL NO.	CIRCUITS	DIMENSIONS	
		A	B
SPHb1160−P0202Gf−0530−0400	2X2	2.00	4.00
SPHb1160−P0302Gf−0530−0400	3X2	4.00	6.00
SPHb1160−P0402Gf−0530−0400	4X2	6.00	8.00
SPHb1160−P0502Gf−0530−0400	5X2	8.00	10.00
SPHb1160−P0602Gf−0530−0400	6X2	10.00	12.00
SPHb1160−P0702Gf−0530−0400	7X2	12.00	14.00
SPHb1160−P0802Gf−0530−0400	8X2	14.00	16.00
SPHb1160−P0902Gf−0530−0400	9X2	16.00	18.00
SPHb1160−P1002Gf−0530−0400	10X2	18.00	20.00
SPHb1160−P1102Gf−0530−0400	11X2	20.00	22.00
SPHb1160−P1202Gf−0530−0400	12X2	22.00	24.00
SPHb1160−P1302Gf−0530−0400	13X2	24.00	26.00
SPHb1160−P1402Gf−0530−0400	14X2	26.00	28.00
SPHb1160−P1502Gf−0530−0400	15X2	28.00	30.00
SPHb1160−P1602Gf−0530−0400	16X2	30.00	32.00
SPHb1160−P1702Gf−0530−0400	17X2	32.00	34.00
SPHb1160−P1802Gf−0530−0400	18X2	34.00	36.00
SPHb1160−P1902Gf−0530−0400	19X2	36.00	38.00
SPHb1160−P2002Gf−0530−0400	20X2	38.00	40.00
SPHb1160−P2102Gf−0530−0400	21X2	40.00	42.00
SPHb1160−P2202Gf−0530−0400	22X2	42.00	44.00
SPHb1160−P2302Gf−0530−0400	23X2	44.00	46.00
SPHb1160−P2402Gf−0530−0400	24X2	46.00	48.00
SPHb1160−P2502Gf−0530−0400	25X2	48.00	50.00
SPHb1160−P2602Gf−0530−0400	26X2	50.00	52.00
SPHb1160−P2702Gf−0530−0400	27X2	52.00	54.00
SPHb1160−P2802Gf−0530−0400	28X2	54.00	56.00
SPHb1160−P2902Gf−0530−0400	29X2	56.00	58.00
SPHb1160−P3002Gf−0530−0400	30X2	58.00	60.00

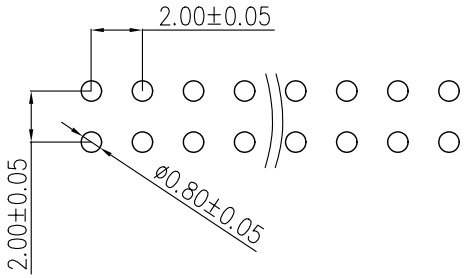

RECOMMENDED P.C.BOARD HOLE LAYOUT

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.25			SIGNATURES		DATE	MODEL
			DRAWN	SAM	30/JUN/04'	TITLE STACK PIN HEADER
SYMBOL	UNIT	SCALE	CHECKED	FRED	30/JUN/04'	NO. SPHb1160−P__02Gf−0530−0400
△	mm	5/1	APPROVALS			

MMT CORPORATION

TEL:(510)979−2188 www.mmtmachrone.com FAX:(510)979−2189