

6

5

4



3

2



1

APPROVED: \_\_\_\_\_  
DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_



Rev	AWO #	Description	Date	Appr
-		RELEASED	8/11/10	
A		UPDATE SPEC.	11/2/18	AY/IL

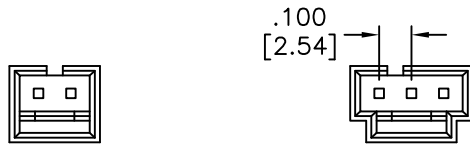


2P



3P

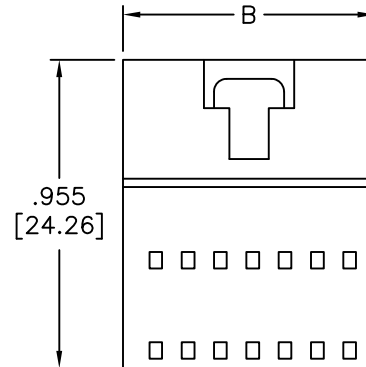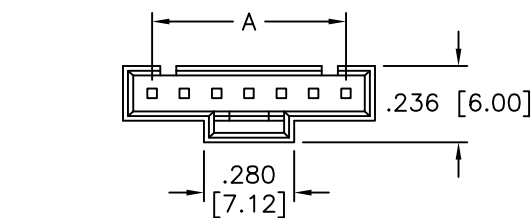

4P~16P

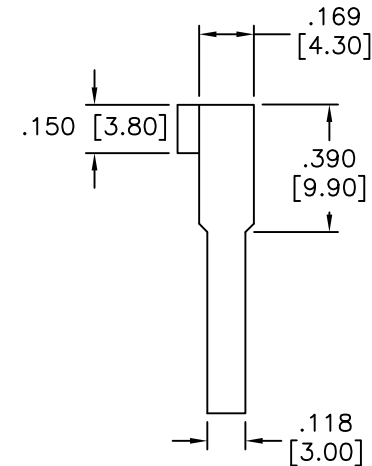

**SPECIFICATIONS:**

Material:  
 Insulator: PA66, rated UL 94V-0  
 Insulator color: Black  
 Electrical:  
 Voltage rating: 250V  
 Current rating: 3A  
 Insulation resistance: 1000 mohms min  
 Dielectric withstanding voltage: 800 VAC for 1 minute  
 Temperature range:  
 -40°C to +105°C  
 Environmental:  
 Lead free, RoHS compliant.



Positions: 2 thru 16  
 A = .100 [2.54] x No. of Spaces  
 B = A + .180 [4.58]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	∅.X	± .10
.XX	± .020	∅.XX	± .015
.XXX	± .015	∅.XXX	± .010
APPROVALS		DATE	
DRAWN	DY	8/11/10	
CHECKED			
APPROVED			



909 Rahway Avenue,  
 Union, NJ 07083  
 Phone: 908-687-5000  
 Fax: 908-687-5710

TITLE .100 [2.54] WIRE TO WIRE CONNECTOR			
SIZE X	PART NO. DMZ-XX-V0	REV. A	
REF: S00123T	SCALE: NTS	SHEET 1 OF 1	

6

5

4

3

2

1