

FIXED NEGATIVE OUTPUT 3-Terminal REGULATOR SERIES**DESCRIPTION**

M5F79MXX is a semiconductor integrated circuit designed for 3 terminal regulator which is available for maximum load current 500mA class negative output.

A current limiting circuit, heat protection circuit and ASO protection circuit are included.

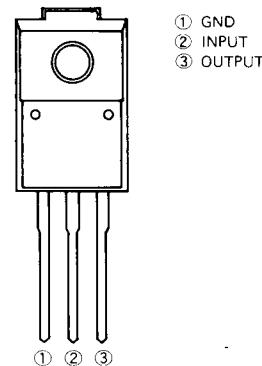
The device is suitable for a wide range of general power supply applications such as microcomputers, due to the variety of output voltage ranks.

FEATURES

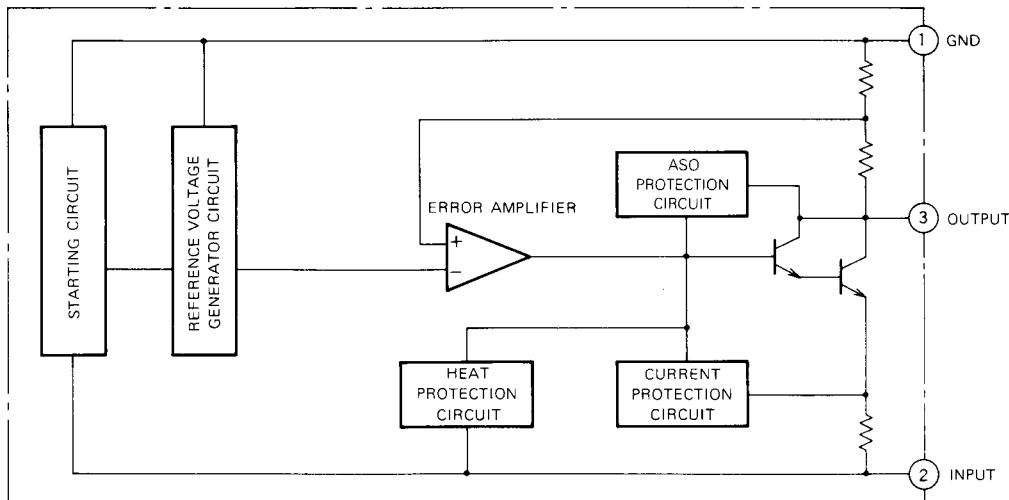
- No need for external connecting parts
- Input stability 0.01%/V
- Load stability 0.1%
- Variety of output voltage ranks
(-5V, -6V, -7V, -8V, -9V, -10V, -12V, -15V, -18V, -20V, -24V)

APPLICATION

For general power supply of various types of electronic equipment such as VCR, CD

PIN CONFIGURATION (TOP VIEW)

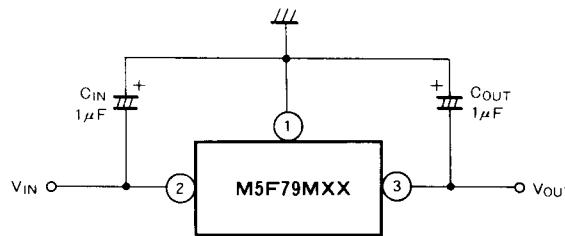
Outline 3P9

BLOCK DIAGRAM

FIXED NEGATIVE OUTPUT 3-Terminal REGULATOR SERIES**ABSOLUTE MAXIMUM RATINGS** ($T_a = 25^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
V_{IN}	Input voltage		35/40*	V
P_d	Power dissipation		2 (no heat sink)	W
			20 (with infinite heat sink)	
T_a	Operating temperature		-20 ~ +85	°C
T_j	Junction temperature		-20 ~ +150	°C
T_{stg}	Storage temperature		-55 ~ +150	°C

* M5F79M24

STANDARD CONNECTION**ELECTRIC CHARACTERISTICS****M5F79M05** ($V_{IN} = -10\text{V}$, $I_0 = 350\text{mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_{OUT}	Output voltage	$T_j = 25^\circ\text{C}$	-5.2	-5.0	-4.8	V
		$-25\text{V} \leq V_{IN} \leq -7\text{V}$, $5\text{mA} \leq I_0 \leq 350\text{mA}$	-5.25		-4.75	
ΔV_o Line	Input stability	$T_j = 25^\circ\text{C}$, $-25\text{V} \leq V_{IN} \leq -7\text{V}$		6	50	mV
		$T_j = 25^\circ\text{C}$, $-18\text{V} \leq V_{IN} \leq -8\text{V}$		2	30	
ΔV_o Load	Load stability	$T_j = 25^\circ\text{C}$, $5\text{mA} \leq I_0 \leq 500\text{mA}$		8	100	mV
		$T_j = 25^\circ\text{C}$, $5\text{mA} \leq I_0 \leq 350\text{mA}$		4	60	
I_{CC}	Operating current	$T_j = 25^\circ\text{C}$		3	5	mA
ΔI_{CC}	Operating current change	$-25\text{V} \leq V_{IN} \leq -8\text{V}$			0.5	mA
		$5\text{mA} \leq I_0 \leq 350\text{mA}$			0.4	
V_N	Output noise voltage	$T_j = 25^\circ\text{C}$, $10\text{Hz} - 100\text{kHz}$		50		μVRms
R.R	Ripple rejection ratio	$f = 120\text{Hz}$, $-18\text{V} \leq V_{IN} \leq -8\text{V}$	62	80		dB
V_{DROP}	Input output voltage difference	$T_j = 25^\circ\text{C}$		2		V
R_o	Output resistance	$f = 1\text{kHz}$		10		$\text{m}\Omega$
I_{OS}	Output short current	$T_j = 25^\circ\text{C}$, $V_{IN} = -35\text{V}$		200		mA
I_{OP}	Output peak current	$T_j = 25^\circ\text{C}$		0.7		A
$\Delta V_o / \Delta T_j$	Output voltage temperature coefficient	$I_0 = 5\text{mA}$		0.2		$\text{mV}/^\circ\text{C}$

FIXED NEGATIVE OUTPUT 3-Terminal Regulator Series**M5F79M06** ($V_{IN} = -11V$, $I_O = 350mA$, $0^\circ C \leq T_J \leq 125^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V _{OUT}	Output voltage	T _J = 25°C	-6.25	-6.0	-5.75	V
		-25V ≤ V _{IN} ≤ -8V, 5mA ≤ I _O ≤ 350mA	-6.3		-5.7	
△V _O Line	Input stability	T _J = 25°C, -25V ≤ V _{IN} ≤ -8V		7	60	mV
		T _J = 25°C, -19V ≤ V _{IN} ≤ -9V		2	40	
△V _O Load	Load stability	T _J = 25°C, 5mA ≤ I _O ≤ 500mA		9	120	mV
		T _J = 25°C, 5mA ≤ I _O ≤ 350mA		5	60	
I _{CC}	Operating current	T _J = 25°C		3	5	mA
△I _{CC}	Operating current change	-25V ≤ V _{IN} ≤ -9V		0.5		mA
		5mA ≤ I _O ≤ 350mA			0.4	
V _N	Output noise voltage	T _J = 25°C, 10Hz ~ 100kHz		60		μVrms
R.R	Ripple rejection ratio	f = 120Hz, -19V ≤ V _{IN} ≤ -9V	60	78		dB
V _{DROP}	Input output voltage difference	T _J = 25°C		1.1		V
R _O	Output resistance	f = 1kHz		10		mΩ
I _{OS}	Output short current	T _J = 25°C, V _{IN} = -35V		200		mA
I _{OP}	Output peak current	T _J = 25°C		0.7		A
△V _O /△T _J	Output voltage temperature coefficient	I _O = 5mA		-0.2		mV/°C

M5F79M07 ($V_{IN} = -12V$, $I_O = 350mA$, $0^\circ C \leq T_J \leq 125^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V _{OUT}	Output voltage	T _J = 25°C	-7.3	-7.0	-6.7	V
		-25V ≤ V _{IN} ≤ -9V, 5mA ≤ I _O ≤ 350mA	-7.35		-6.65	
△V _O Line	Input stability	T _J = 25°C, -25V ≤ V _{IN} ≤ -9V		8	70	mV
		T _J = 25°C, -20V ≤ V _{IN} ≤ -10V		3	45	
△V _O Load	Load stability	T _J = 25°C, 5mA ≤ I _O ≤ 500mA		11	140	mV
		T _J = 25°C, 5mA ≤ I _O ≤ 350mA		5	70	
I _{CC}	Operating current	T _J = 25°C		3	5	mA
△I _{CC}	Operating current change	-25V ≤ V _{IN} ≤ -10V		0.5		mA
		5mA ≤ I _O ≤ 350mA			0.4	
V _N	Output noise voltage	T _J = 25°C, 10Hz ~ 100kHz		70		μVrms
R.R	Ripple rejection ratio	f = 120Hz, -20V ≤ V _{IN} ≤ -10V	60	77		dB
V _{DROP}	Input output voltage difference	T _J = 25°C		1.1		V
R _O	Output resistance	f = 1kHz		10		mΩ
I _{OS}	Output short current	T _J = 25°C, V _{IN} = -35V		200		mA
I _{OP}	Output peak current	T _J = 25°C		0.7		A
△V _O /△T _J	Output voltage temperature coefficient	I _O = 5mA		-0.3		mV/°C

FIXED NEGATIVE OUTPUT 3-Terminal Regulator Series

M5F79M08 ($V_{IN} = -14V$, $I_O = 350mA$, $0^\circ C \leq T_J \leq 125^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_{OUT}	Output voltage	$T_J = 25^\circ C$	-8.3	-8.0	-7.7	V
		$-25V \leq V_{IN} \leq -10.5V$, $5mA \leq I_O \leq 350mA$	-8.4		-7.6	
ΔV_o Line	Input stability	$T_J = 25^\circ C$, $-25V \leq V_{IN} \leq -10.5V$		8	80	mV
		$T_J = 25^\circ C$, $-21V \leq V_{IN} \leq -11V$		3	50	
ΔV_o Load	Load stability	$T_J = 25^\circ C$, $5mA \leq I_O \leq 500mA$		13	160	mV
		$T_J = 25^\circ C$, $5mA \leq I_O \leq 350mA$		7	80	
I_{CC}	Operating current	$T_J = 25^\circ C$		3	5	mA
ΔI_{CC}	Operating current change	$-25V \leq V_{IN} \leq -10.5V$			0.5	mA
		$5mA \leq I_O \leq 350mA$			0.4	
V_N	Output noise voltage	$T_J = 25^\circ C$, $10Hz \sim 100kHz$		80		μV_{rms}
R.R	Ripple rejection ratio	$f = 120Hz$, $-21.5V \leq V_{IN} \leq -11.5V$	60	76		dB
V_{DROP}	Input output voltage difference	$T_J = 25^\circ C$		1.1		V
R_o	Output resistance	$f = 1kHz$		10		$m\Omega$
I_{OS}	Output short current	$T_J = 25^\circ C$, $V_{IN} = -35V$		200		mA
I_{OP}	Output peak current	$T_J = 25^\circ C$		0.7		A
$\Delta V_o/\Delta T_J$	Output voltage temperature coefficient	$I_O = 5mA$		-0.3		$mV/^\circ C$

M5F79M09 ($V_{IN} = -15V$, $I_O = 350mA$, $0^\circ C \leq T_J \leq 125^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_{OUT}	Output voltage	$T_J = 25^\circ C$	-9.35	-9.0	-8.65	V
		$-25V \leq V_{IN} \leq -11.5V$, $5mA \leq I_O \leq 350mA$	-9.45		-8.55	
ΔV_o Line	Input stability	$T_J = 25^\circ C$, $-25V \leq V_{IN} \leq -11.5V$		8	80	mV
		$T_J = 25^\circ C$, $-22V \leq V_{IN} \leq -12V$		4	50	
ΔV_o Load	Load stability	$T_J = 25^\circ C$, $5mA \leq I_O \leq 500mA$		14	180	mV
		$T_J = 25^\circ C$, $5mA \leq I_O \leq 350mA$		7	90	
I_{CC}	Operating current	$T_J = 25^\circ C$		3	5	mA
ΔI_{CC}	Operating current change	$-25V \leq V_{IN} \leq -11.5V$			0.5	mA
		$5mA \leq I_O \leq 350mA$			0.4	
V_N	Output noise voltage	$T_J = 25^\circ C$, $10Hz \sim 100kHz$		90		μV_{rms}
R.R	Ripple rejection ratio	$f = 120Hz$, $-22.5V \leq V_{IN} \leq -12.5V$	59	75		dB
V_{DROP}	Input output voltage difference	$T_J = 25^\circ C$		1.1		V
R_o	Output resistance	$f = 1kHz$		10		$m\Omega$
I_{OS}	Output short current	$T_J = 25^\circ C$, $V_{IN} = -35V$		200		mA
I_{OP}	Output peak current	$T_J = 25^\circ C$		0.7		A
$\Delta V_o/\Delta T_J$	Output voltage temperature coefficient	$I_O = 5mA$		-0.4		$mV/^\circ C$

FIXED NEGATIVE OUTPUT 3-Terminal Regulator Series**M5F79M10** ($V_{IN} = -16V$, $I_O = 350mA$, $0^\circ C \leq T_J \leq 125^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V _{OUT}	Output voltage	T _J = 25°C	-10.4	-10	-9.6	V
		-25V ≤ V _{IN} ≤ -12.5V, 5mA ≤ I _O ≤ 350mA	-10.5		-9.5	
△V _O Line	Input stability	T _J = 25°C, -25V ≤ V _{IN} ≤ -12.5V		9	80	mV
		T _J = 25°C, -23V ≤ V _{IN} ≤ -13V		4	50	
△V _O Load	Load stability	T _J = 25°C, 5mA ≤ I _O ≤ 500mA		16	200	mV
		T _J = 25°C, 5mA ≤ I _O ≤ 350mA		8	100	
I _{CC}	Operating current	T _J = 25°C		3	5	mA
△I _{CC}	Operating current change	-25V ≤ V _{IN} ≤ -12.5V			0.5	mA
		5mA ≤ I _O ≤ 350mA			0.4	
V _N	Output noise voltage	T _J = 25°C, 10Hz ~ 100kHz		100		μVrms
R.R	Ripple rejection ratio	f = 120Hz, -23.5V ≤ V _{IN} ≤ -13.5V	59	74		dB
V _{DROP}	Input output voltage difference	T _J = 25°C		1.1		V
R _O	Output resistance	f = 1kHz		12		mΩ
I _{OS}	Output short current	T _J = 25°C, V _{IN} = -35V		200		mA
I _{OP}	Output peak current	T _J = 25°C		0.7		A
△V _O /△T _J	Output voltage temperature coefficient	I _O = 5mA		-0.4		mV/°C

M5F79M12 ($V_{IN} = -19V$, $I_O = 350mA$, $0^\circ C \leq T_J \leq 125^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V _{OUT}	Output voltage	T _J = 25°C	-12.5	-12	-11.5	V
		-30V ≤ V _{IN} ≤ -14.5V, 5mA ≤ I _O ≤ 350mA	-12.6		-11.4	
△V _O Line	Input stability	T _J = 25°C, -30V ≤ V _{IN} ≤ -14.5V		9	80	mV
		T _J = 25°C, -25V ≤ V _{IN} ≤ -15V		5	50	
△V _O Load	Load stability	T _J = 25°C, 5mA ≤ I _O ≤ 500mA		19	240	mV
		T _J = 25°C, 5mA ≤ I _O ≤ 350mA		10	120	
I _{CC}	Operating current	T _J = 25°C		3	5	mA
△I _{CC}	Operating current change	-30V ≤ V _{IN} ≤ -14.5V			0.5	mA
		5mA ≤ I _O ≤ 350mA			0.4	
V _N	Output noise voltage	T _J = 25°C, 10Hz ~ 100kHz		120		μVrms
R.R	Ripple rejection ratio	f = 120Hz, -25V ≤ V _{IN} ≤ -15V	58	72		dB
V _{DROP}	Input output voltage difference	T _J = 25°C		1.1		V
R _O	Output resistance	f = 1kHz		12		mΩ
I _{OS}	Output short current	T _J = 25°C, V _{IN} = -35V		200		mA
I _{OP}	Output peak current	T _J = 25°C		0.7		A
△V _O /△T _J	Output voltage temperature coefficient	I _O = 5mA		-0.5		mV/°C

FIXED NEGATIVE OUTPUT 3-Terminal Regulator Series**M5F79M15** ($V_{IN} = -23V$, $I_O = 350mA$, $0^\circ C \leq T_J \leq 125^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V _{OUT}	Output voltage	T _J = 25°C	-15.6	-15	-14.4	V
		-30V ≤ V _{IN} ≤ -17.5V, 5mA ≤ I _O ≤ 350mA	-15.75		-14.25	
△V _O Line	Input stability	T _J = 25°C, -30V ≤ V _{IN} ≤ -17.5V		9	80	mV
		T _J = 25°C, -28V ≤ V _{IN} ≤ -18V		5	50	
△V _O Load	Load stability	T _J = 25°C, 5mA ≤ I _O ≤ 500mA		24	240	mV
		T _J = 25°C, 5mA ≤ I _O ≤ 350mA		12	120	
I _{CC}	Operating current	T _J = 25°C		3	5	mA
△I _{CC}	Operating current change	-30V ≤ V _{IN} ≤ -17.5V			0.5	mA
		5mA ≤ I _O ≤ 350mA			0.4	
V _N	Output noise voltage	T _J = 25°C, 10Hz ~ 100kHz		150		μV _{rms}
R.R	Ripple rejection ratio	f = 120Hz, -28.5V ≤ V _{IN} ≤ -18.5V	58	70		dB
V _{DROP}	Input output voltage difference	T _J = 25°C		1.1		V
R _O	Output resistance	f = 1kHz		14		mΩ
I _{OS}	Output short current	T _J = 25°C, V _{IN} = -35V		200		mA
I _{OP}	Output peak current	T _J = 25°C		0.7		A
△V _O /△T _J	Output voltage temperature coefficient	I _O = 5mA		-0.6		mV/°C

M5F79M18 ($V_{IN} = -27V$, $I_O = 350mA$, $0^\circ C \leq T_J \leq 125^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V _{OUT}	Output voltage	T _J = 25°C	-18.7	-18	-17.3	V
		-33V ≤ V _{IN} ≤ -21V, 5mA ≤ I _O ≤ 350mA	-18.9		-17.1	
△V _O Line	Input stability	T _J = 25°C, -33V ≤ V _{IN} ≤ -21V		11	80	mV
		T _J = 25°C, -30V ≤ V _{IN} ≤ -24V		8	50	
△V _O Load	Load stability	T _J = 25°C, 5mA ≤ I _O ≤ 500mA		29	300	mV
		T _J = 25°C, 5mA ≤ I _O ≤ 350mA		14	150	
I _{CC}	Operating current	T _J = 25°C		3	5	mA
△I _{CC}	Operating current change	-33V ≤ V _{IN} ≤ -21V			0.5	mA
		5mA ≤ I _O ≤ 350mA			0.4	
V _N	Output noise voltage	T = 25°C, 10Hz ~ 100kHz		180		μV _{rms}
R.R	Ripple rejection ratio	f = 120Hz, -32V ≤ V _{IN} ≤ -22V	57	69		dB
V _{DROP}	Input output voltage difference	T _J = 25°C		1.1		V
R _O	Output resistance	f = 1kHz		14		mΩ
I _{OS}	Output short current	T _J = 25°C, V _{IN} = -35V		200		mA
I _{OP}	Output peak current	T _J = 25°C		0.7		A
△V _O /△T _J	Output voltage temperature coefficient	I _O = 5mA		-0.7		mV/°C

FIXED NEGATIVE OUTPUT 3-Terminal Regulator Series**M5F79M20** ($V_{IN} = -30V$, $I_O = 350mA$, $0^\circ C \leq T_J \leq 125^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V _{OUT}	Output voltage	T _J = 25°C	-20.8	-20	-19.2	V
		-35V ≤ V _{IN} ≤ -23V, 5mA ≤ I _O ≤ 350mA	-21		-19	
△V _O Line	Input stability	T _J = 25°C, -35V ≤ V _{IN} ≤ -23V		12	80	mV
		T _J = 25°C, -34V ≤ V _{IN} ≤ -24V		10	50	
△V _O Load	Load stability	T _J = 25°C, 5mA ≤ I _O ≤ 500mA		32	300	mV
		T _J = 25°C, 5mA ≤ I _O ≤ 350mA		16	150	
I _{CC}	Operating current	T _J = 25°C		3	5	mA
△I _{CC}	Operating current change	-35V ≤ V _{IN} ≤ -23V			0.5	mA
		5mA ≤ I _O ≤ 350mA			0.4	
V _N	Output noise voltage	T _J = 25°C, 10Hz ~ 100kHz		200		μVrms
R.R	Ripple rejection ratio	f = 120Hz, -34V ≤ V _{IN} ≤ -24V	56	68		dB
V _{DROP}	Input output voltage difference	T _J = 25°C		1.1		V
R _O	Output resistance	f = 1kHz		16		mΩ
I _{OS}	Output short current	T _J = 25°C, V _{IN} = -35V		200		mA
I _{OP}	Output peak current	T _J = 25°C		0.7		A
△V _O /△T _J	Output voltage temperature coefficient	I _O = 5mA		-0.8		mV/°C

M5F79M24 ($V_{IN} = -33V$, $I_O = 350mA$, $0^\circ C \leq T_J \leq 125^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V _{OUT}	Output voltage	T _J = 25°C	-25	-24	-23	V
		-38V ≤ V _{IN} ≤ -27V, 5mA ≤ I _O ≤ 350mA	-25.2		-22.8	
△V _O Line	Input stability	T _J = 25°C, -38V ≤ V _{IN} ≤ -27V		12	80	mV
		T _J = 25°C, -38V ≤ V _{IN} ≤ -28V		12	50	
△V _O Load	Load stability	T _J = 25°C, 5mA ≤ I _O ≤ 500mA		38	300	mV
		T _J = 25°C, 5mA ≤ I _O ≤ 350mA		19	150	
I _{CC}	Operating current	T _J = 25°C		3	5	mA
△I _{CC}	Operating current change	-38V ≤ V _{IN} ≤ -27V			0.5	mA
		5mA ≤ I _O ≤ 350mA			0.4	
V _N	Output noise voltage	T _J = 25°C, 10Hz ~ 10Hz ~ 100kHz		240		μVrms
R.R	Ripple rejection ratio	f = 120Hz, -38V ≤ V _{IN} ≤ -28V	54	66		dB
V _{DROP}	Input output voltage difference	T _J = 25°C		1.1		V
R _O	Output resistance	f = 1kHz		20		mΩ
I _{OS}	Output short current	T _J = 25°C, V _{IN} = -35V		200		mA
I _{OP}	Output peak current	T _J = 25°C		0.7		A
△V _O /△T _J	Output voltage temperature coefficient	I _O = 5mA		-1.0		mV/°C