
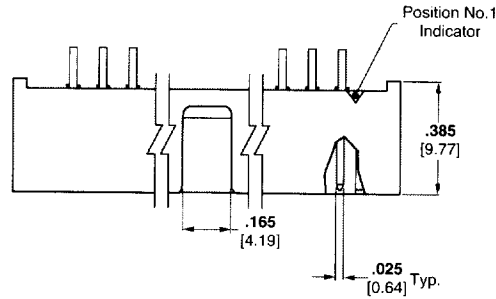


### Low Profile Headers — Shrouded High Temperature Housings, with .150 [3.81] End Dimension Double Row, .100 x .100 [2.54 x 2.54] Centers

**.025 [0.64] Square  
Right-Angle Post  
(with Board Retention  
Feature)**




**Material and Finish:**

**Housing**—Grey thermoplastic, 94V-0 rated, flame retardant, high temperature compatible

**Contacts**—Copper alloy, duplex plated

**Plating Specifications:**

**Duplex<sup>1</sup>** — .000015 [0.00038] gold on contact area, .000100-.000200 [0.00254-0.00508] tin-lead on solder area, with entire post underplated  
.000050 [0.00127] nickel

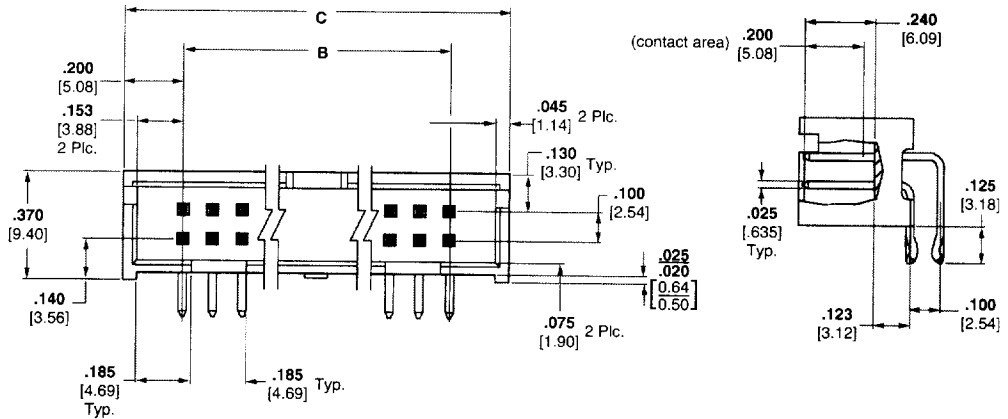

**Related Product Data:**

**Electrical Characteristics**—page 4007

**Mateable Connectors:**  
Pages 4008 thru 4010

**Accessories:**

**Snap-In Polarizer** — page 4032

No. of Positions	Dimensions		Post Plating	Part Numbers
	B	C		
10	.400	.800	Duplex <sup>1</sup>	104340-1
	10.16	20.32	Duplex <sup>2</sup>	104341-1
14	.600	1.000	Duplex <sup>1</sup>	104340-2
	15.24	25.40	Duplex <sup>2</sup>	104341-2
20	.900	1.300	Duplex <sup>1</sup>	104340-4
	22.86	33.02	Duplex <sup>2</sup>	104341-4
24	1.100	1.400	Duplex <sup>2</sup>	104341-5
	27.94	35.56		
26	1.200	1.600	Duplex <sup>2</sup>	104341-6
	30.48	40.64		
34	1.600	2.000	Duplex <sup>2</sup>	104341-7
	40.64	50.80		
40	1.900	2.300	Duplex <sup>1</sup>	104340-8
	48.26	58.42	Duplex <sup>2</sup>	104341-8
50	2.400	2.800	Duplex <sup>1</sup>	104340-9
	60.96	71.12	Duplex <sup>2</sup>	104341-9

Ribbon and Flexible Flat Cable Products