



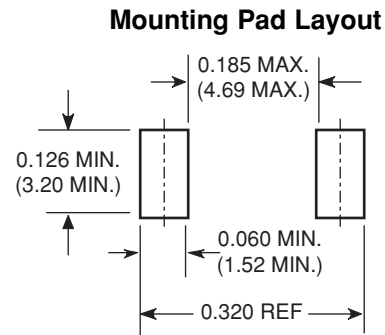

Surface Mount TRANSZORB® Transient Voltage Suppressors

DO-214AB (SMC J-Bend)

Breakdown Voltage 6.8 to 220V
Peak Pulse Power 1500W

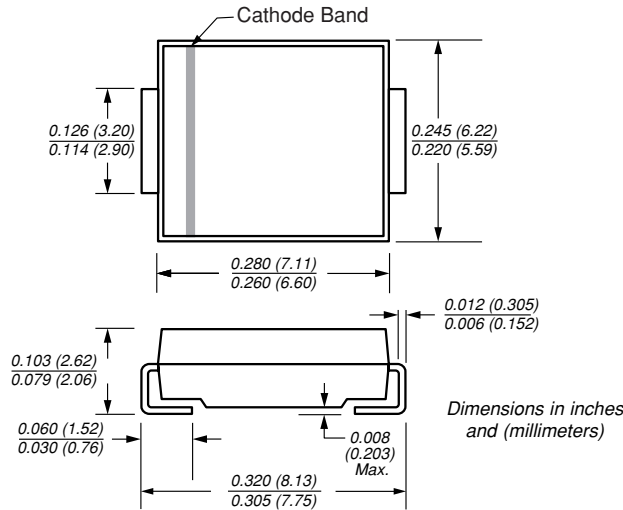

Mechanical Data

Case: JEDEC DO-214AB (SMC) molded plastic over passivated junction

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: For uni-directional types the band denotes the cathode, which is positive with respect to the anode under normal TVS operation

Standard Packaging: 12mm tape (EIA STD RS-481)

Weight: 0.003 oz., 0.093 g

Packaging Codes – Options (Antistatic):

51 – 1K per Bulk box, 10K/carton

57 – 850 per 7" plastic Reel (16mm tape), 8.5K/carton

9A – 3.5K per 13" plastic Reel (16mm tape), 35K/carton

Devices for Bidirectional Applications

For bi-directional devices, use suffix CA (e.g. SM15T10CA). Electrical characteristics apply in both directions.

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Peak pulse power dissipation with a 10/1000µs waveform ⁽¹⁾⁽²⁾ (Fig. 1)	PPPM	Minimum 1500	W
Peak pulse current with a 10/1000µs waveform ⁽¹⁾ (Fig. 3)	IPPM	See Next Table	A
Power dissipation on infinite heatsink, T _A = 50°C	P _{M(AV)}	6.5	W
Peak forward surge current 10ms single half sine-wave uni-directional only ⁽²⁾	I _{FSM}	200	A
Typical thermal resistance junction to ambient air ⁽³⁾	R _{θJA}	75	°C/W
Typical thermal resistance junction to leads	R _{θJL}	15	°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-65 to +150	°C

Notes: (1) Non-repetitive current pulse, per Fig.3 and derated above T_A = 25°C per Fig. 2

(2) Mounted on 0.31 x 0.31" (8.0 x 8.0mm) copper pads to each terminal

(3) Mounted on minimum recommended pad layout

Electrical Characteristics (T_A=25°C unless otherwise noted)

Type ⁽¹⁾	Device Marking Code		Standoff Voltage V _{RM} (V)	Leakage Current ⁽³⁾ I _{RM@V_R}	Breakdown Voltage V _{BR} @ I _T ⁽²⁾ (V)		Test Current I _T (mA)	Clamping Voltage V _C @ I _{PP} (10/1000μs)		Clamping Voltage V _C @ I _{PP} (8/20μs)		α _T Max 10 ⁻⁴ /°C
	Uni	Bi			Min	Max		(V)	(A)	(V)	(A)	
SM15T6V8A	GDE7	GDE7	5.80	1000	6.45	7.14	10	10.5	143	13.4	746	5.7
SM15T7V5A	GDK7	BDK7	6.40	500	7.13	7.88	10	11.3	132	14.5	690	6.1
SM15T10A	GDT7	BDT7	8.55	10.0	9.50	10.5	1.0	14.5	103	18.6	538	7.3
SM15T12A	GDX7	BDX7	10.2	5.0	11.4	12.6	1.0	16.7	90.0	21.7	461	7.8
SM15T15A	GEG7	GEG7	12.8	1.0	14.3	15.8	1.0	21.2	71.0	27.2	368	8.4
SM15T18A	GEM7	BEM7	15.3	1.0	17.1	18.9	1.0	25.2	59.5	32.5	308	8.8
SM15T22A	GET7	BET7	18.8	1.0	20.9	23.1	1.0	30.6	49.0	39.3	254	9.2
SM15T24A	GEV7	GEV7	20.5	1.0	22.8	25.2	1.0	33.2	45.0	42.8	234	9.4
SM15T27A	GEX7	BEX7	23.1	1.0	25.7	28.4	1.0	37.5	40.0	48.3	207	9.6
SM15T30A	GFE7	BFE7	25.6	1.0	28.5	31.5	1.0	41.5	36.0	53.5	187	9.7
SM15T33A	GFG7	GFG7	28.2	1.0	31.4	34.7	1.0	45.7	33.0	59.0	169	9.8
SM15T36A	GFK7	BFK7	30.8	1.0	34.2	37.8	1.0	49.9	30.0	64.3	156	9.9
SM15T39A	GFM7	BFM7	33.3	1.0	37.1	41.0	1.0	53.9	28.0	69.7	143	10.0
SM15T68A	GGG7	GGG7	58.1	1.0	64.6	71.4	1.0	92.0	16.3	121	83	10.4
SM15T100A	GGV7	GGV7	85.5	1.0	95.0	105	1.0	137	11.0	178	56	10.6
SM15T150A	GHK7	GHK7	128	1.0	143	158	1.0	207	7.20	265	38	10.8
SM15T200A	GHR7	GHR7	171	1.0	190	210	1.0	274	5.50	353	28	10.8
SM15T220A	GHR8	GHR8	188	1.0	209	231	1.0	328	4.60	388	26	10.8

Notes:

- (1) For bi-directional devices add suffix "CA" instead of "A"
- (2) V_{BR} measured after I_T applied for 300μs square wave pulse
- (3) For bipolar devices with V_R=10 Volts or under, the I_T limit is doubled

Application Notes

A 1500W (SMC) device is normally selected when the threat of transients is from lightning induced transients, conducted via external leads or I/O lines. It is also used to protect against switching transients induced by large coils or industrial motors. Source impedance at component level in a system is usually high enough to limit the current within the peak pulse current (I_{PP}) rating of this series. In an overstress condition, the failure mode is a short circuit.

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 – Peak Pulse Power Rating Curve

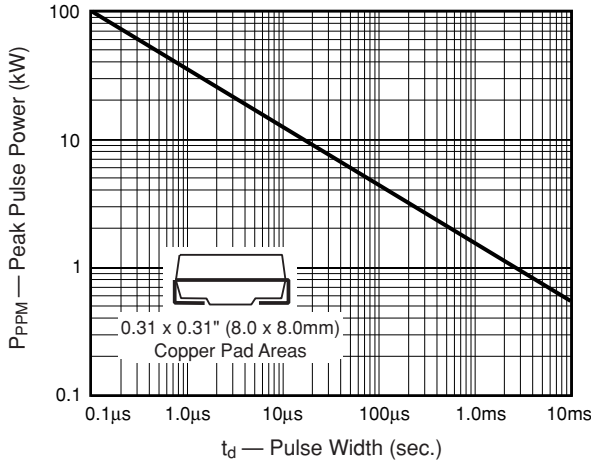


Fig. 2 – Pulse Derating Curve

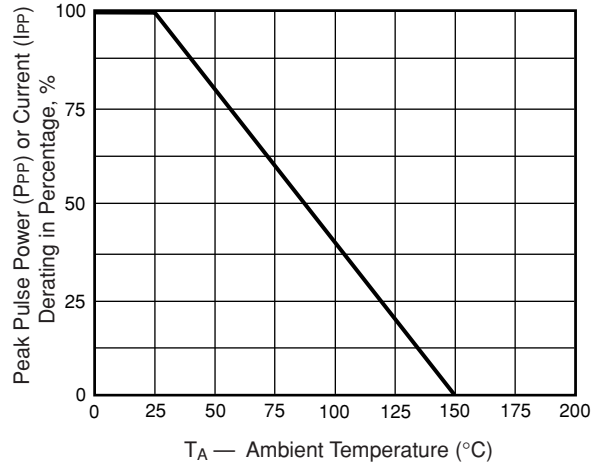


Fig. 3 – Pulse Waveform

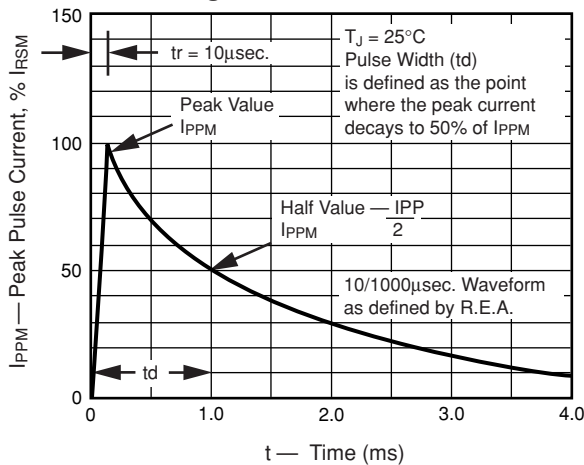


Fig. 4 – Typical Junction Capacitance Uni-Directional

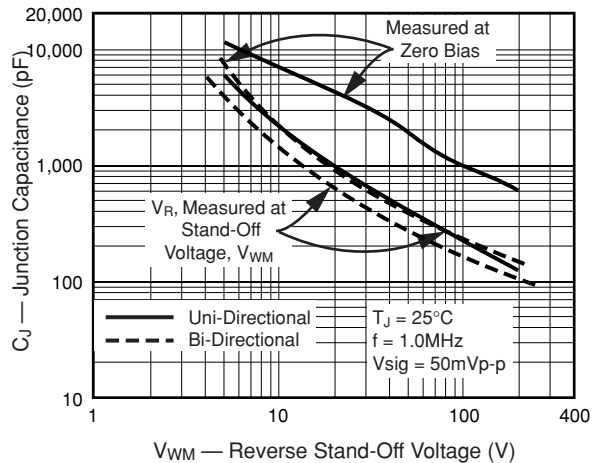


Fig. 5 – Typical Transient Thermal Impedance


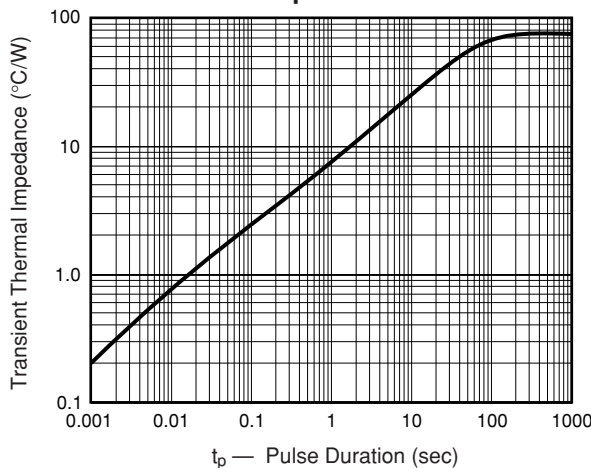


Fig. 6 - Maximum Non-Repetitive Forward Surge Current Uni-Directional Use Only



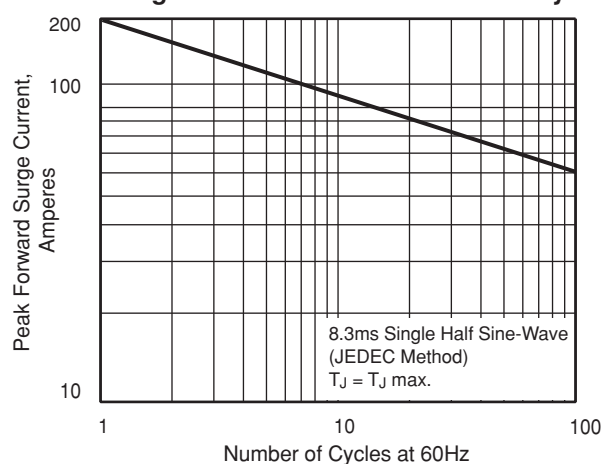

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.