


DB202S Thru DB207S

High Current Glass Passivated Molding Single-Phase Bridge Rectifier

Reverse Voltage 100 to 1000V Forward Current 2.0 A

FEATURES

- Plastic Package has Underwriters Laboratory Flammability Classification 94V-0
- High current capacity with small package
- Glass passivated chip junctions
- Superior thermal conductivity
- High IFSM

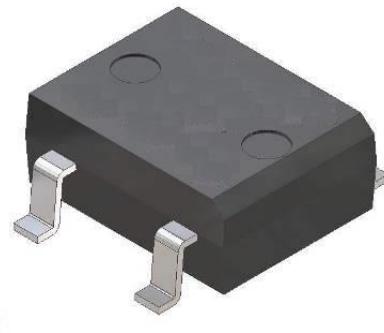

1. Maximum & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	Symbol	DB202S	DB203S	DB204S	DB205S	DB206S	DB207S	Unit
Maximum repetitive voltage	VRRM	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	100	200	400	600	800	1000	V
Maximum DC reverse current TA=25 °C at rated DC blocking voltage TA=125°C	IR			5				µA
Average rectified forward current 60Hz Sine wave Resistance load with Ta=55°C	Io			2				A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	IFSM			70				A
Max instantaneous forward voltage at 2.0A	VF			1.05				V
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	I ² t			20				A ² sec
Maximum thermal on P.C.B. without heat-sink	R _{θJA}			40				°C/W
Operating junction temperature	TJ			-55~150				°C
Storage temperature	Tstg			-55~150				°C

DB202S Thru DB207S

2. Ratings and Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 Derating Curve

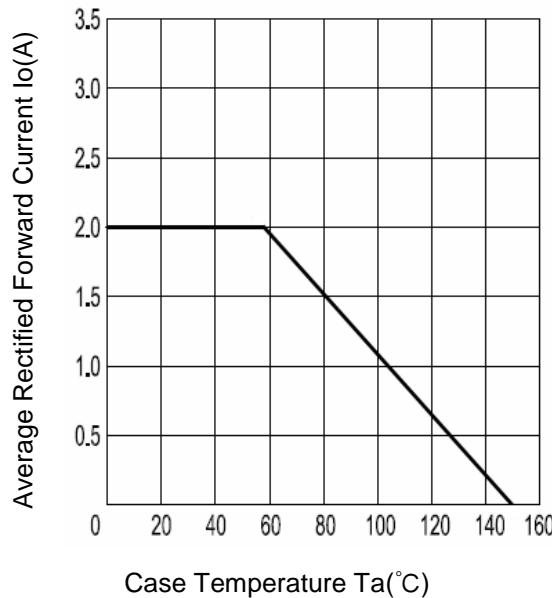


Fig.2 Typical Reverse Characteristics

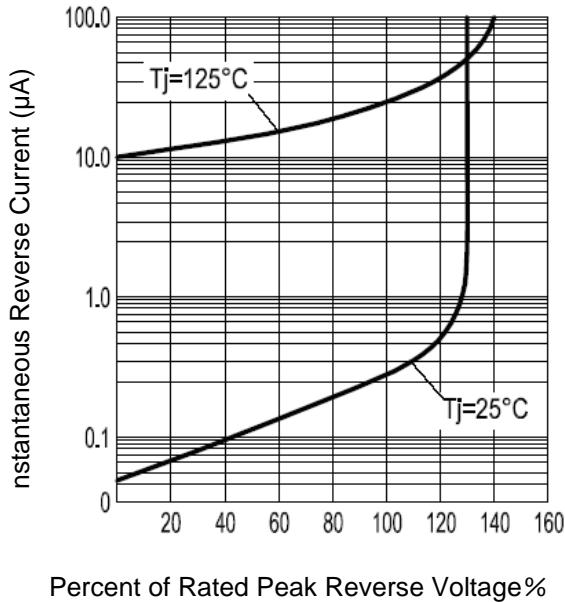


Fig.3 Forward Voltage



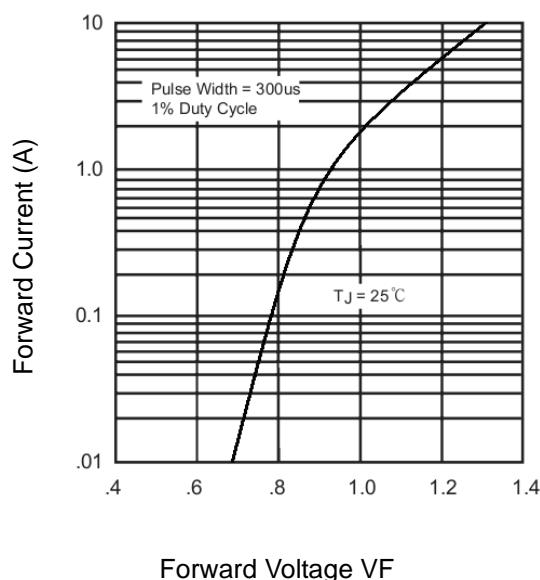


Fig.4 Peak Surge Forward Capability

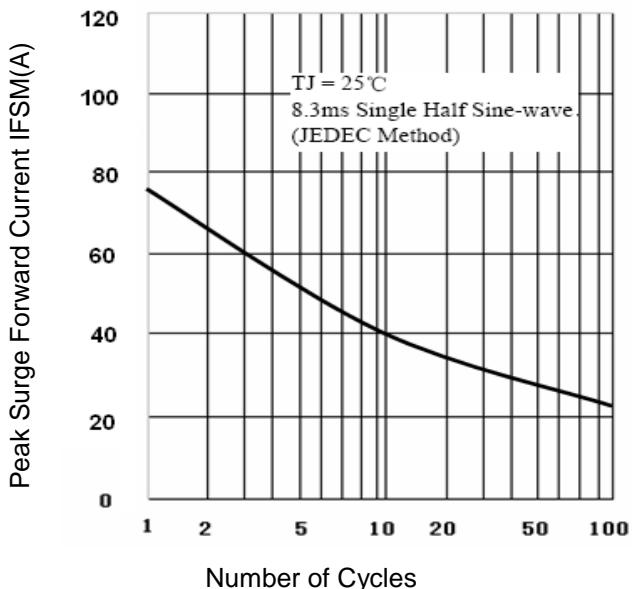

DB202S Thru DB207S

3. Marking Identification

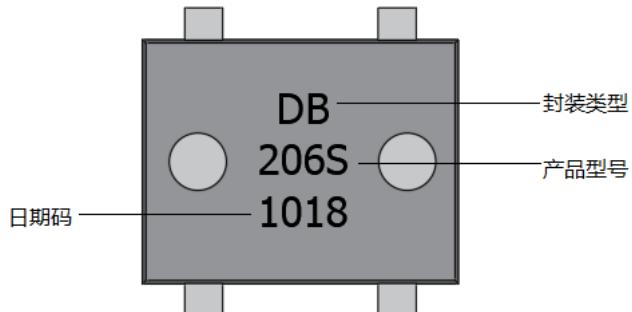

Note:

生产日期码包含4位数字，例如“1018”，前两个数字“10”表示为2010年，另外二个数字“18”是指第18周，即表示该产品为2010年18周生产。

型号：

DB

2

06

S

→ SMT

→ bridge reverse voltage=800V

→ average rectified forward Current=2A

→ mean: DB series bridge

4. Dimension

