

FAST 74F651, 74F651A 74F652, 74F652A Transceivers/Registers

FAST Products

FEATURES

- High impedance base inputs for reduced loading (70 μ A in High and Low states)
- Independent registers for A and B buses
- Multiplexed real-time and stored data
- Choice of non-inverting and inverting data paths
- 3-state outputs

DESCRIPTION

The 74F651/74F651A and 74F652/74F652A Transceivers/Registers consist of bus transceiver circuits with 3-state outputs, D-type flip-flops, and control circuitry arranged for multiplexed transmission of data directly from the input bus or the internal registers. Data on the A or B bus will be clocked into the registers as the appropriate clock pin goes High. Output Enable (OEAB, OEBA) and Select (SAB, SBA) pins are provided for bus management.

74F651/74F651A Octal Transceiver/Register, Inverting (3-State)
74F652/74F652A Octal Transceiver/Register, Non-Inverting (3-State)
Preliminary Specification for 74F651A and 74F652A
Product Specification for 74F651 and 74F652

TYPE	TYPICAL f_{MAX}	TYPICAL SUPPLY CURRENT (TOTAL)
74F651/74F652	110MHz	140mA
74F651A/74F652A	110MHz	120mA

ORDERING INFORMATION

PACKAGES	COMMERCIAL RANGE $V_{CC} = 5V \pm 10\%$; $T_A = 0^\circ C$ to $+70^\circ C$
24-Pin Plastic Slim Dip (300mil)	N74F651N, N74F651AN, N74F652N, N74F651AN
24-Pin Plastic SOL ¹	N74F651D, N74F651AD, N74F652D, N74F652AD

NOTE 1:

Thermal mounting techniques are recommended. See SMD Process Applications (page 17) for a discussion of thermal consideration for surface mounted devices.


INPUT AND OUTPUT LOADING AND FAN-OUT TABLE

PINS	DESCRIPTION	74F(U.L.) HIGH/LOW	LOAD VALUE HIGH/LOW
A ₀ - A ₇	A inputs	3.5/0.116	70 μ A/70 μ A
B ₀ - B ₇	B inputs	3.5/0.116	70 μ A/70 μ A
CPAB	A-to-B clock input	1.0/0.033	20 μ A/20 μ A
CPBA	B-to-A clock input	1.0/0.033	20 μ A/20 μ A
SAB	A-to-B select input	1.0/0.033	20 μ A/20 μ A
SBA	B-to-A select input	1.0/0.033	20 μ A/20 μ A
OEAB	A-to-B output enable input	1.0/0.033	20 μ A/20 μ A
OEBA	B-to-A output enable input	1.0/0.033	20 μ A/20 μ A
A ₀ - A ₇	A outputs	750/106.7	15mA/64mA
B ₀ - B ₇	B outputs	750/106.7	15mA/64mA


NOTE:

One (1.0) FAST Unit Load is defined as: 20 μ A in the High state and 0.6mA in the Low state.


PIN CONFIGURATION

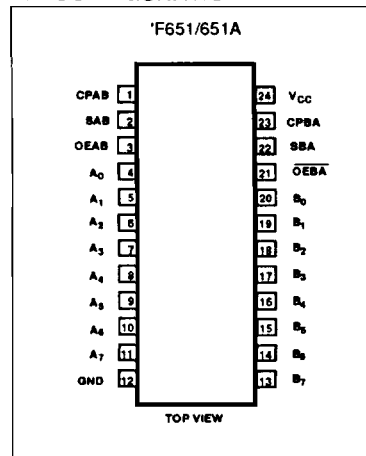

LOGIC SYMBOL

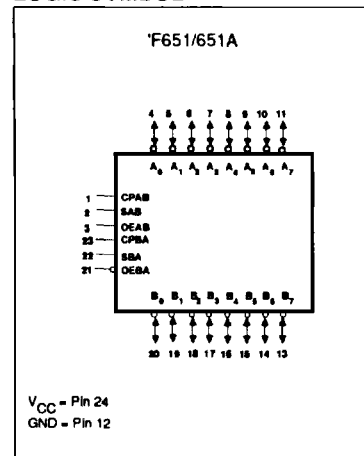

LOGIC SYMBOL (IEEE/IEC)

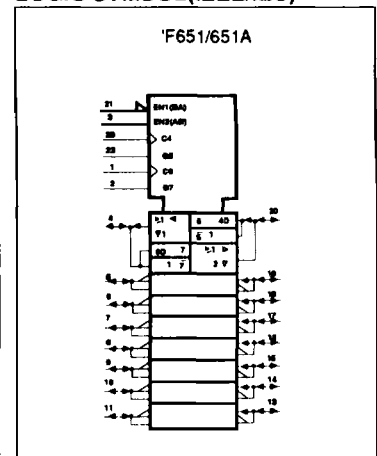


Transceivers/Registers



FAST 74F651, 74F652, 74F651A, 74F652A

The following examples demonstrate the four fundamental bus-management functions that can be performed with the 'F651/651A and 'F652/652A. The select pins determine whether data is stored or transferred through the device in real time. The Output Enable pins determine the direction of the data flow.


LOGIC SYMBOL

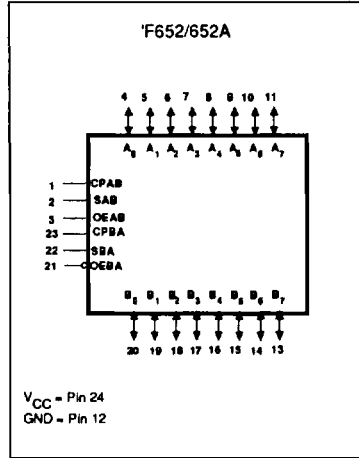

LOGIC SYMBOL(IEEE/IEC)

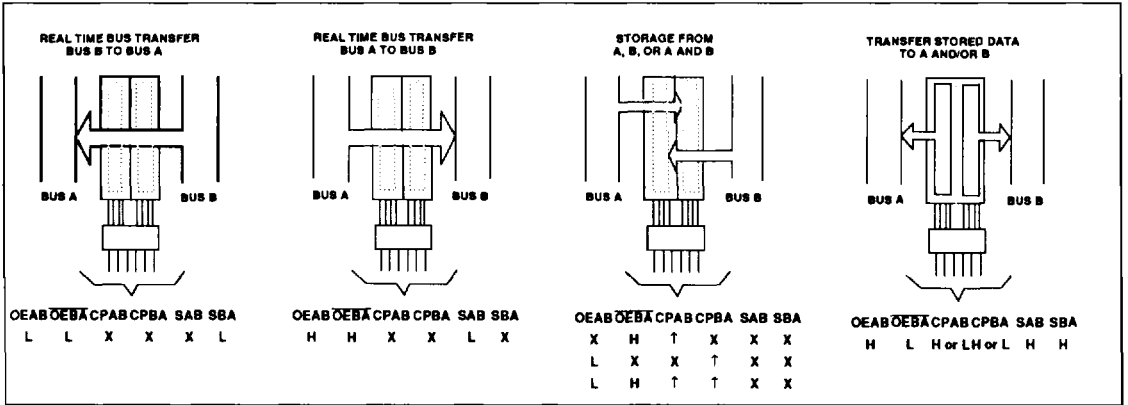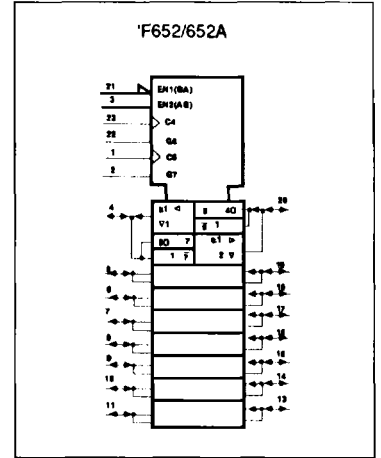

LOGIC DIAGRAM

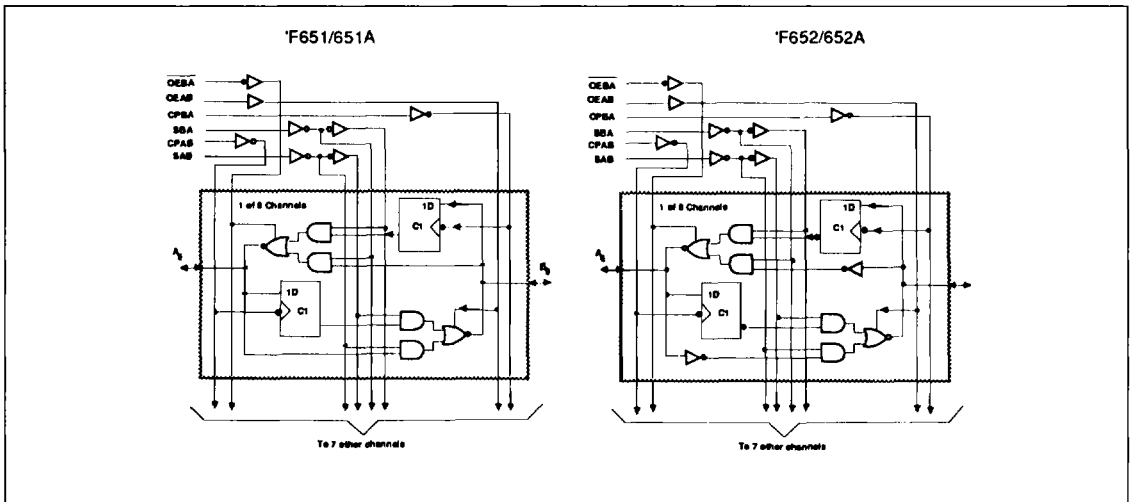

Transceivers/Registers

FAST 74F651, 74F652, 74F651A, 74F652A

FUNCTION TABLE

INPUTS						DATA I/O		OPERATING MODE	
OEAB	OEBA	CPAB	CPBA	SAB	SBA	A _n	B _n	'F651/651A	'F652/652A
L	H	H or L	H or L	X	X	Input	Input	Isolation	Isolation
L	H	↑	↑	X	X			Store A and B data	Store A and B data
X	H	↑	H or L	X	X	Input	Unspecified*	Store A, Hold B	Store A, Hold B
H	H	↑	↑	L	X	Input	Output	Store A in both registers	Store A in both registers
L	X	H or L	↑	X	X	Unspecified*	Input	Hold A, Store B	Hold A, Store B
L	L	↑	↑	X	L	Output	Input	Store B in both registers	Store B in both registers
L	L	X	X	X	L	Output	Input	Real time B data to A bus	Real time B data to A bus
L	L	X	H or L	X	H			Stored B data to A bus	Stored B data to A bus
H	H	X	X	L	X	Input	Output	Real time A data to B bus	Real time A data to B bus
H	H	H or L	X	H	X			Stored A data to B bus	Stored A data to B bus
H	L	H or L	H or L	H	H	Output	Output	Stored A data to B bus	Stored A data to B bus
								Stored B data to A bus	Stored B data to A bus

NOTES:

H= High voltage level

L= Low voltage level

*= The data output function may be enabled or disabled by various signals at the OEBA and OEAB inputs. Data input functions are always enabled, i.e., data at the bus pins will be stored on every Low-to-High transition of the clock.

↑ =Low-to-High clock transition

X=Don't care

ABSOLUTE MAXIMUM RATINGS

(Operation beyond the limits set forth in this table may impair the useful life of the device. Unless otherwise noted these limits are over the operating free-air temperature range.)

SYMBOL	PARAMETER	RATING	UNIT
V _{CC}	Supply voltage	-0.5 to +7.0	V
V _{IN}	Input voltage	-0.5 to +7.0	V
I _{IN}	Input current	-30 to +5	mA
V _{OUT}	Voltage applied to output in High output state	-0.5 to +V _{CC}	V
I _{OUT}	Current applied to output in Low output state	128	mA
T _A	Operating free-air temperature range	0 to +70	°C
T _{STG}	Storage temperature	-65 to +150	°C

RECOMMENDED OPERATING CONDITIONS

SYMBOL	PARAMETER	LIMITS			UNIT
		Min	Nom	Max	
V _{CC}	Supply voltage	4.5	5.0	5.5	V
V _{IH}	High-level input voltage	2.0			V
V _{IL}	Low-level input voltage			0.8	V
I _{IK}	Input clamp current			-18	mA
I _{OH}	High-level output current			-15	mA
I _{OL}	Low-level output current			64	mA
T _A	Operating free-air temperature range	0		70	°C

Transceivers/Registers

FAST 74F651, 74F652, 74F651A, 74F652A

DC ELECTRICAL CHARACTERISTICS (Over recommended operating free-air temperature range unless otherwise noted.)

SYMBOL	PARAMETER		TEST CONDITIONS ¹			LIMITS			UNIT
						Min	Typ ²	Max	
V_{OH}	High-level output voltage		$V_{CC} = \text{MIN},$ $V_{IL} = \text{MAX}$ $V_{IH} = \text{MIN},$	$I_{OH} = -3\text{mA}$	$\pm 10\%V_{CC}$	2.4			V
					$\pm 5\%V_{CC}$	2.7	3.3		V
			$\pm 10\%V_{CC}$	2.0			V		
V_{OL}	Low-level output voltage		$V_{CC} = \text{MIN},$ $V_{IL} = \text{MAX}$ $V_{IH} = \text{MIN},$	$I_{OL} = \text{MAX}$	$\pm 10\%V_{CC}$			0.55	V
					$\pm 5\%V_{CC}$		0.42	0.55	V
V_{IK}	Input clamp voltage		$V_{CC} = \text{MIN}, I_1 = I_{IK}$				-0.73	-1.2	V
I_I	Input current at maximum input voltage		others		$V_{CC} = 0.0\text{V}, V_I = 7.0\text{V}$			100	μA
			A_0-A_7, B_0-B_7		$V_{CC} = 5.5\text{V}, V_I = 5.5\text{V}$			1	mA
I_{IH}	High-level input current	OEAB, OEBA, CPAB, CPBA	$V_{CC} = \text{MAX}, V_I = 2.7\text{V}$					20	μA
I_{IL}	Low-level input current	SAB, SBA	$V_{CC} = \text{MAX}, V_I = 0.5\text{V}$					-20	μA
$I_{IH} + I_{OZH}$	Off-state output current High-level voltage applied		$A_0-A_7,$		$V_{CC} = \text{MAX}, V_I = 2.7\text{V}$			70	μA
$I_{IL} + I_{OZL}$	Off-state output current Low-level voltage applied		B_0-B_7		$V_{CC} = \text{MAX}, V_I = 0.5\text{V}$			-70	μA
I_{OS}	Short-circuit output current ³		$V_{CC} = \text{MAX}$			-100		-225	mA
I_{CC}	Supply current (total)		74F651 74F652	I_{CCH}	$V_{CC} = \text{MAX}$		110	155	mA
				I_{CCL}			140 ⁴	185 ⁴	mA
			I_{CCZ}			155	200	mA	
						165 ⁴	240 ⁴	mA	
			74F651A 74F652A	I_{CCH}			130	175	mA
				I_{CCL}			110	145	mA
I_{CCZ}		120		155	mA				
			130	170	mA				

NOTES:

- For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable type.
- All typical values are at $V_{CC} = 5\text{V}, T_A = 25^\circ\text{C}$.
- Not more than one output should be shorted at a time. For testing I_{OS} , the use of high-speed test apparatus and/or sample-and-hold techniques are preferable in order to minimize internal heating and more accurately reflect operational values. Otherwise, prolonged shorting of a High output may raise the chip temperature well above normal and thereby cause invalid readings in other parameter tests. In any sequence of parameter tests, I_{OS} tests should be performed last.
- These values are for worst case only. Worst case is defined as all (16) I/O pins selected as outputs. When using worst case conditions thermal mounting is required.

Transceivers/Registers

FAST 74F651, 74F652, 74F651A, 74F652A

AC ELECTRICAL CHARACTERISTICS for 74F651/74F652

SYMBOL	PARAMETER	TEST CONDITION	LIMITS					UNIT
			$T_A = +25^\circ\text{C}$ $V_{CC} = 5\text{V}$ $C_L = 50\text{pF}$ $R_L = 500\Omega$			$T_A = 0^\circ\text{C to } +70^\circ\text{C}$ $V_{CC} = 5\text{V } \pm 10\%$ $C_L = 50\text{pF}$ $R_L = 500\Omega$		
			Min	Typ	Max	Min	Max	
f_{MAX}	Maximum clock frequency	Waveform 1	90	110		80		MHz
t_{PLH} t_{PHL}	Propagation delay CPAB or CPBA to A_n or B_n	Waveform 1	5.0 5.5	7.0 7.5	10.5 11.0	4.5 5.0	12.5 12.0	ns
t_{PLH} t_{PHL}	Propagation delay A_n or B_n to B_n or A_n	Waveform 2,3	3.0 3.0	6.0 6.0	10.0 9.0	2.5 3.0	12.0 10.0	ns
t_{PLH} t_{PHL}	Propagation delay SAB or SBA to A_n or B_n	Waveform 2,3	4.0 4.0	7.0 6.5	10.0 9.5	4.0 4.0	12.5 10.0	ns
t_{PZH} t_{PZL}	Output Enable time OEAB or OEBA to A_n or B_n	Waveform 7 Waveform 8	4.0 6.0	7.0 10.5	10.0 12.0	3.5 5.5	11.0 13.0	ns
t_{PHZ} t_{PLZ}	Output Disable time OEAB or OEBA to A_n or B_n	Waveform 7 Waveform 8	4.5 4.5	9.5 9.0	13.0 13.0	4.0 4.0	14.5 15.5	ns

AC SETUP REQUIREMENTS for 74F651/74F652

SYMBOL	PARAMETER	TEST CONDITION	LIMITS					UNIT
			$T_A = +25^\circ\text{C}$ $V_{CC} = 5\text{V}$ $C_L = 50\text{pF}$ $R_L = 500\Omega$			$T_A = 0^\circ\text{C to } +70^\circ\text{C}$ $V_{CC} = 5\text{V } \pm 10\%$ $C_L = 50\text{pF}$ $R_L = 500\Omega$		
			Min	Typ	Max	Min	Max	
$t_s(\text{H})$ $t_s(\text{L})$	Setup time, High or Low A_n or B_n to CPAB or CPBA	Waveform 4	4.0 4.0			5.0 5.0		ns
$t_h(\text{H})$ $t_h(\text{L})$	Hold time, High or Low A_n or B_n to CPAB or CPBA	Waveform 4	0 0			0 0		ns
$t_s(\text{H})$ $t_s(\text{L})$	Setup time, High or Low ¹ OEBA to OEAB or OEAB to OEBA	Waveform 5, 6	5.0 5.0			5.0 5.0		ns
$t_h(\text{H})$ $t_h(\text{L})$	Hold time, High or Low OEBA to OEAB or OEAB to OEBA	Waveform 5, 6	0 0			0 0		ns
$t_w(\text{H})$ $t_w(\text{L})$	Pulse width, High or Low CPAB or CPBA	Waveform 1	4.5 6.5			4.5 6.5		ns

Note: 1. Setup time is to protect against current surge caused by enabling 16 outputs (64mA per output) simultaneously.

Transceivers/Registers

FAST 74F651, 74F652, 74F651A, 74F652A

AC ELECTRICAL CHARACTERISTICS for 74F651A/74F652A

SYMBOL	PARAMETER	TEST CONDITION	LIMITS					UNIT
			T _A = +25°C V _{CC} = 5V C _L = 50pF R _L = 500Ω			T _A = 0°C to +70°C V _{CC} = 5V ±10% C _L = 50pF R _L = 500Ω		
			Min	Typ	Max	Min	Max	
f _{MAX}	Maximum clock frequency	Waveform 1	90	110		80		MHz
t _{PLH} t _{PHL}	Propagation delay CPAB or CPBA to A _n or B _n	Waveform 1	5.0 4.5	7.0 6.5	9.5 9.0	4.5 4.0	11.5 10.0	ns
t _{PLH} t _{PHL}	Propagation delay A _n or B _n to B _n or A _n	Waveform 2,3	2.0 2.0	5.0 4.5	8.0 8.0	2.0 2.0	9.0 9.0	ns
t _{PLH} t _{PHL}	Propagation delay SAB or SBA to A _n or B _n	Waveform 2,3	4.0 4.0	7.0 6.5	9.0 8.5	4.0 4.0	11.5 9.0	ns
t _{PZH} t _{PZL}	Output Enable time OEAB or OEBA to A _n or B _n	Waveform 7 Waveform 8	4.0 5.0	7.0 8.5	9.0 10.0	3.5 4.5	10.0 11.0	ns
t _{PHZ} t _{PLZ}	Output Disable time OEAB or OEBA to A _n or B _n	Waveform 7 Waveform 8	4.5 4.5	8.0 8.0	9.5 9.5	4.0 4.0	10.5 10.5	ns

AC SETUP REQUIREMENTS for 74F651A/74F652A


SYMBOL	PARAMETER	TEST CONDITION	LIMITS					UNIT
			T _A = +25°C V _{CC} = 5V C _L = 50pF R _L = 500Ω			T _A = 0°C to +70°C V _{CC} = 5V ±10% C _L = 50pF R _L = 500Ω		
			Min	Typ	Max	Min	Max	
t _s (H) t _s (L)	Setup time, High or Low A _n or B _n to CPAB or CPBA	Waveform 4	4.0 4.0			5.0 5.0		ns
t _h (H) t _h (L)	Hold time, High or Low A _n or B _n to CPAB or CPBA	Waveform 4	0 0			0 0		ns
t _s (H) t _s (L)	Setup time, High or Low ¹ OEBA to OEAB or OEAB to OEBA	Waveform 5, 6	5.0 5.0			5.0 5.0		ns
t _h (H) t _h (L)	Hold time, High or Low OEBA to OEAB or OEAB to OEBA	Waveform 5, 6	0 0			0 0		ns
t _w (H) t _w (L)	Pulse width, High or Low CPAB or CPBA	Waveform 1	4.5 6.5			4.5 6.5		ns

Note: 1. Setup time is to protect against current surge caused by enabling 16 outputs (64mA per output) simultaneously.

Transceivers/Registers

FAST 74F651, 74F652, 74F651A, 74F652A

AC WAVEFORMS

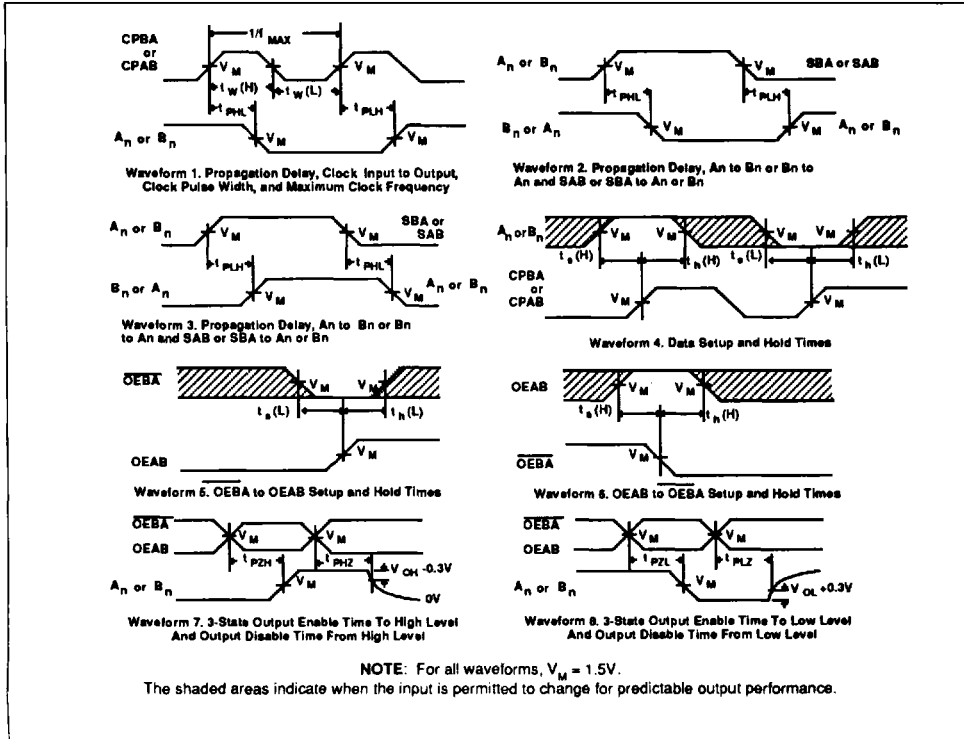

TEST CIRCUIT AND WAVEFORMS

