

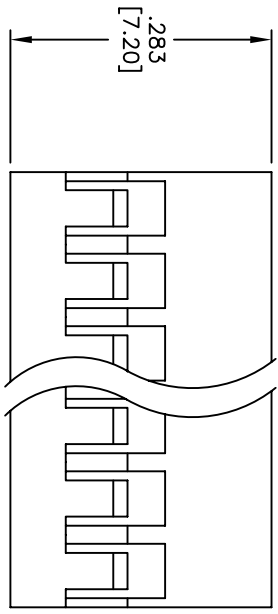


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/6/05	
A		DESIGN CHANGE / REDRAWN	7/15/08	
B		REVISED SHAPE	10/08/08	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

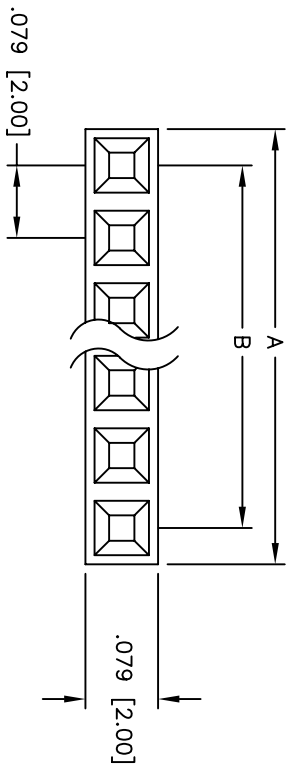

Positions: 2 thru 30  
 A = .079 [2.00] x No. of Positions + .012 [0.30]  
 B = .079 [2.00] x No. of Spaces

SPECIFICATIONS:  
 Material:  
 Insulator: Nylon 66, rated UL 94V-2  
 Insulator color: Black

Electrical:  
 Operating voltage: 250 VAC max  
 Current rating: 1 Amp max  
 Insulation resistance: 1,000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 800 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -25°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] CRIMP HOUSING  
 NON-POLARIZED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLE	
.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS	DATE		
DRAWN	SS	4/6/05	
CHECKED			
APPROVED			
SIZE	PART NO.	SCALE	REV.
X	2CH-A1-XX	NTS	B
REF:		SHEET	1 OF 1