


# 4771 SERIES

## HOUSING 3.96mm(0.156")

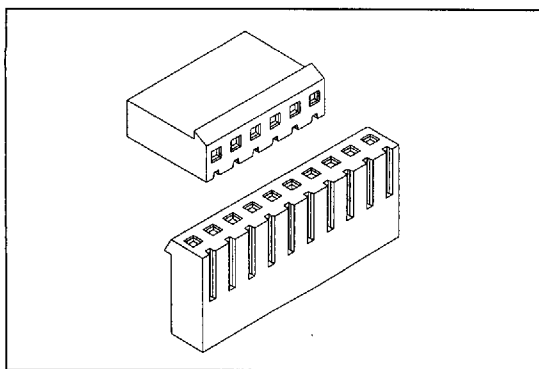

### Material:

Housing: Nylon 66 Flame retardant UL94V-0.  
 Contacts: Brass.  
 Terminal Plating: Tin plated.  
 Recommend wire: 18AWG to 24AWG.


### Electrical Characteristics:

Insulator Resistance: 5000M  $\Omega$  min. at DC 500V.  
 Contact Resistance: 20m  $\Omega$  max. at DC 100mA.  
 Operating Temperature: -25°C ~ +85°C.  
 Current rating: 18AWG - 7.0AMP.  
                   20AWG - 6.5AMP.  
                   22AWG - 5.5AMP.  
                   24AWG - 4.0AMP.

### Features:

- \* Available in single row 2 through 20 position.
- \* Box design terminal order separately.
- \* Side-to-side and end-to-end stackable.

Mates with: 4771 wafer.

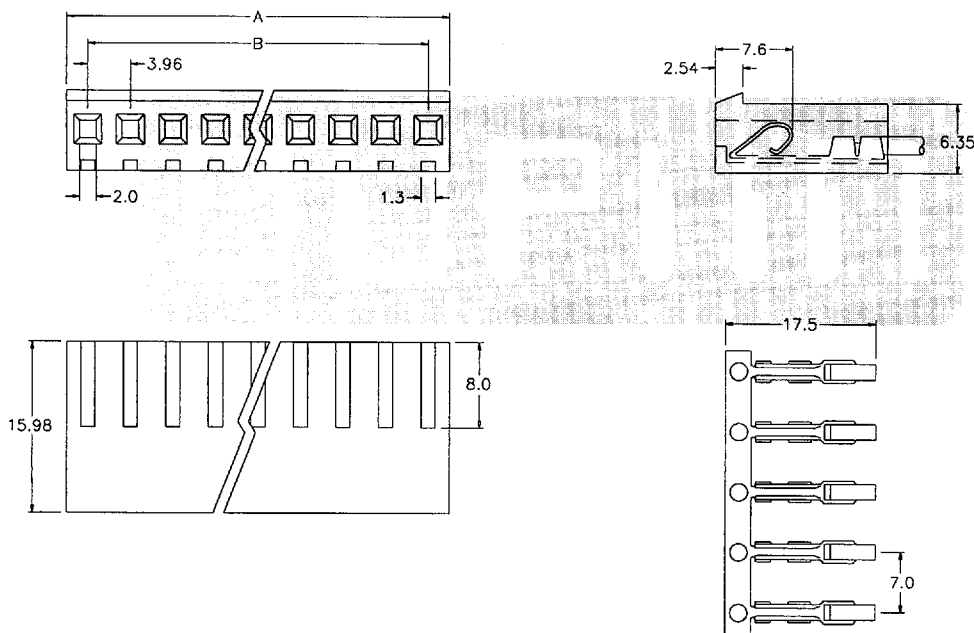

Position	2 Thru 20
Dimension	
A	3.96 X No. of Positions
B	3.96 X No. of Positions - 3.96

## Ordering information

4771- 20 H  
 Series No. of Position H: Housing

4771- Pin-T  
 Tin Plated 7K Pins Per Reel