






## 3000 W Surface Mount Top Glass Transient Voltage Suppressor

<p><b>DO-214AB (SMC)</b></p> 	<p><b>Voltage</b>                  9.5 V to 95 V (Uni)                  9.5 V to 95 V (Bid)</p>	<p><b>Power</b>                  3000 W /ms</p>	
			
	<p><b>FEATURES</b></p> <ul style="list-style-type: none"> <li>Top-Glass Technology</li> <li>Low profile package</li> <li>Ideal for automated placement</li> <li>3000 W peak pulse power capability with a 10/1000 <math>\mu</math>s waveform, repetitive rate (duty cycle): 0.01 %</li> <li>Excellent clamping capability</li> <li>Very fast response time</li> <li>Low incremental surge resistance</li> <li>Available in uni-directional and bi-directional</li> <li>AEC-Q101 qualified</li> <li>Solder dip 260°C, 10s</li> <li>Component in accordance to RoHS 2011/65/EU and WEEE 2002/96/EC</li> <li>Meets MSL level 1, per J-STD-020, LF maximum peak of 260° C</li> </ul>		   <b>RoHS COMPLIANT</b>
	<p><b>MECHANICAL DATA</b></p> <ul style="list-style-type: none"> <li><b>Case:</b> DO-214AB (SMC). Epoxy meets UL 94V-0 flammability rating.</li> <li><b>Polarity:</b> For unidirectional types color band denotes cathode end. No marking on bidirectional types.</li> <li><b>Terminals:</b> Matte tin plated leads, solderable per MIL-STD-750 Method 2026, J-STD-002 and JESD22-B102. Consumer grade, meets JESD 201 class 1A whisker test.</li> <li><b>HE3 suffix</b> for high reliability grade, meets JESD 201 class 2 whisker test.</li> </ul>		
<p><b>TYPICAL APPLICATIONS</b></p> <p>Used in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, automotive and telecommunication.</p>			

### Maximun Ratings and Electrical Characteristics at 25°C

$P_{PPM}$	Peak Pulse Power Dissipation with 10/1000 $\mu$ s exponential pulse	3000 W
$I_{FSM}$	Peak Forward Surge Current 8.3 ms. (Note 1) (Jedec Method) (Note 2)	200 A
$V_F$	Max. forward voltage drop at $I_F = 100$ A (Note 1)	3.5 V
$T_J - T_{STG}$	Operating Junction and Storage Temperature Range	- 65 to + 150 °C


Notes: 1. Only for Unidirectional  
 2. Mounted on 0.31 x 0.31" (8.0 x 8.0 mm) copper pads to each terminal

**3000 W Surface Mount Top Glass Transient Voltage Suppressor**

**Ordering information**

PREFERRED P/N	PACKAGE CODE	DELIVERY MODE	BASE QUANTITY	UNIT WEIGHT (g)
3KSMC33A TG TRTB	TRTB	13" diameter tape and reel	3,500	0.211
3KSMC33A TG HE3 TRTB	TRTB	13" diameter tape and reel	3,500	0.211
3KSMC33CA TG TRTB	TRTB	13" diameter tape and reel	3,500	0.211
3KSMC33CA TG HE3 TRTB	TRTB	13" diameter tape and reel	3,500	0.211

**Package Outline Dimensions: (mm) DO-214AB (SMC)**

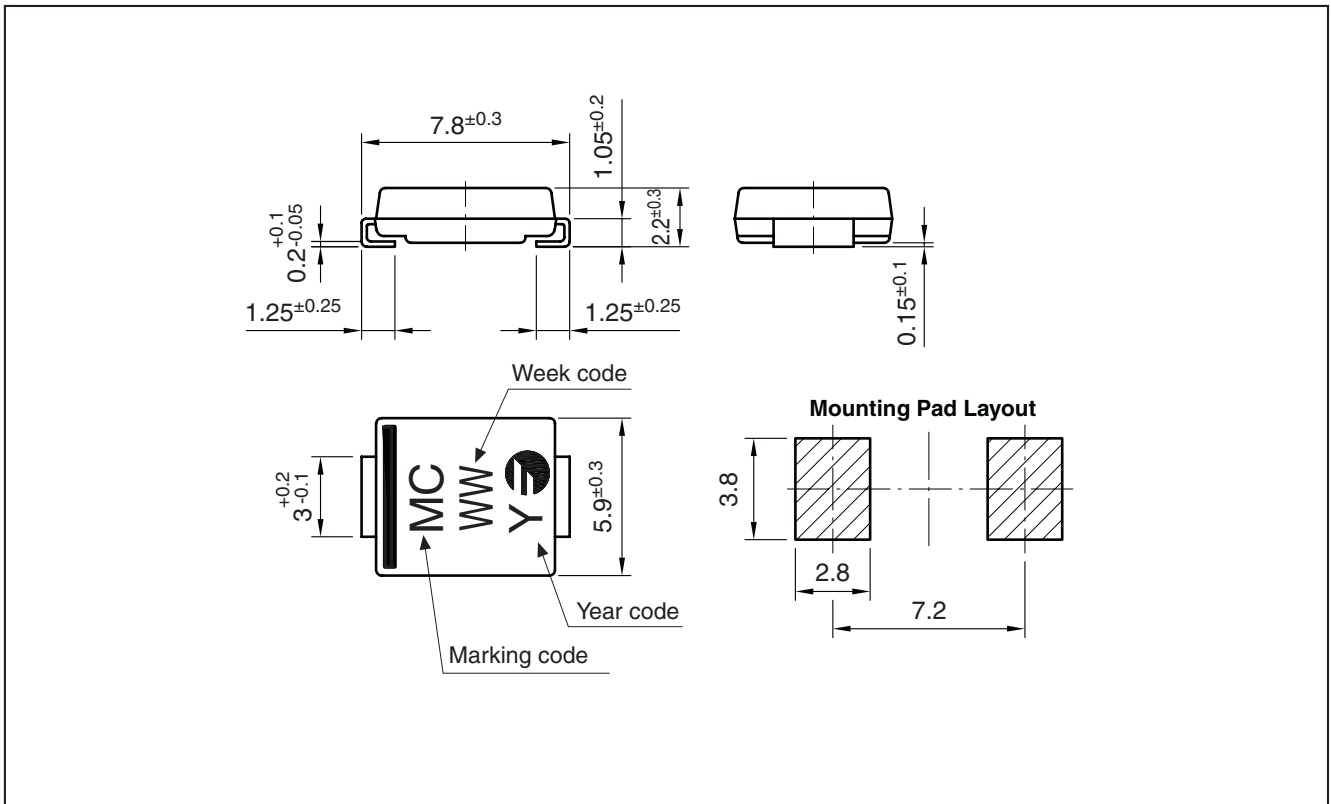

## 3000 W Surface Mount Top Glass Transient Voltage Suppressor

### ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25 °C unless otherwise noted)

DEVICE TYPE	MC (3)	VBR @ IT (1) (V)			IR @ VR		IRM @ Tj = 150°C (µA)	VCL @ IPP 10/1000 µs		RD 10/1000 µs (Ω)	VCL @ IPP 8/20 µs		RD 8/20 µs (Ω)	αT (%/°C)
		min	max	mA	(V)	(µA)		(V)	(A)		(V)	(A)		
3KSMC8.5A TG	CAT	9.44	10.4	1.0	8.5	10.0	50	14.4	208.4	0.020	19.9	1389	0.006	0.070
3KSMC10A TG	CAA	11.1	12.3	1.0	10	5.0	50	17.0	177	0.026	22.5	1217	0.008	0.075
3KSMC11A TG	CAB	12.2	13.5	1.0	11	5.0	50	18.2	165	0.028	23.7	1156	0.009	0.075
3KSMC12A TG	CAC	13.3	14.7	1.0	12	2.0	20	19.9	151	0.034	25.4	1078	0.010	0.080
3KSMC13A TG	CAD	14.4	15.9	1.0	13	2.0	20	21.5	140	0.040	27.0	1014	0.011	0.080
3KSMC14A TG	CAE	15.6	17.2	1.0	14	1.0	10	23.2	129	0.046	28.7	955	0.012	0.085
3KSMC15A TG	CAF	16.7	18.5	1.0	15	1.0	10	24.4	123	0.048	30.0	910	0.013	0.085
3KSMC16A TG	CAG	17.8	19.7	1.0	16	1.0	10	26.0	115	0.055	31.5	870	0.013	0.085
3KSMC17A TG	CAH	18.9	20.9	1.0	17	1.0	10	27.6	109	0.061	33.1	827	0.015	0.075
3KSMC18A TG	CAI	20.0	22.1	1.0	18	1.0	10	29.2	103	0.069	35.0	790	0.016	0.090
3KSMC20A TG	CAJ	22.2	24.5	1.0	20	1.0	10	32.4	92.6	0.085	37.5	730	0.018	0.090
3KSMC22A TG	CAK	24.4	26.9	1.0	22	1.0	10	35.5	84.5	0.102	40.5	680	0.020	0.095
3KSMC24A TG	CAL	26.7	29.5	1.0	24	1.0	10	38.9	77.1	0.122	43.9	630	0.023	0.095
3KSMC26A TG	CAM	28.9	31.9	1.0	26	1.0	10	42.1	71.3	0.143	47.0	600	0.025	0.095
3KSMC28A TG	CAN	31.1	34.4	1.0	28	1.0	10	45.4	66.1	0.166	50.0	560	0.028	0.095
3KSMC30A TG	CAO	33.3	36.8	1.0	30	1.0	15	48.4	62.0	0.187	53.0	530	0.030	0.095
3KSMC33A TG	CAP	36.7	40.6	1.0	33	1.0	15	53.3	56.3	0.226	58.0	490	0.035	0.100
3KSMC36A TG	CAQ	40.0	44.2	1.0	36	1.0	20	58.1	51.6	0.269	62.7	437	0.042	0.100
3KSMC40A TG	CAR	44.4	49.1	1.0	40	1.0	20	64.5	46.5	0.331	69.0	396	0.050	0.105
3KSMC43A TG	CAS	47.8	52.8	1.0	43	1.0	20	69.4	43.2	0.384	73.9	371	0.057	0.105
3KSMC45A TG	CAU	50.0	55.3	1.0	45	2.0	20	72.7	41.3	0.421	77.4	354	0.062	0.105
3KSMC48A TG	CAV	53.3	58.9	1.0	48	2.0	20	77.4	38.8	0.477	82.0	334	0.069	0.105
3KSMC51A TG	CAW	56.7	62.7	1.0	51	2.0	20	82.4	36.4	0.541	87.0	314	0.077	0.105
3KSMC54A TG	CAX	60.0	66.3	1.0	54	2.0	20	87.1	34.4	0.605	91.7	298	0.085	0.105
3KSMC58A TG	CAY	64.4	71.2	1.0	58	2.0	20	93.6	32.1	0.698	98.3	278	0.097	0.110
3KSMC60A TG	CAZ	66.7	73.7	1.0	60	2.0	20	96.8	31.0	0.745	102	268	0.106	0.110
3KSMC64A TG	CCA	71.1	78.6	1.0	64	2.0	20	103	29.1	0.838	108	253	0.116	0.110
3KSMC70A TG	CCB	77.8	86.0	1.0	70	2.0	20	113	26.5	1.019	118	232	0.138	0.110
3KSMC75A TG	CCC	83.3	92.1	1.0	75	2.0	20	121	24.8	1.165	126	217	0.156	0.110
3KSMC78A TG	CCD	86.7	95.8	1.0	78	2.0	20	126	23.8	1.269	132	207	0.175	0.110

#### Notes

- (1) Pulse test: t<sub>p</sub> ≤ 50 ms
- (2) Surge current waveform per fig. 3 and derate per fig. 2
  - All terms and symbols are consistent with ANSI/IEEE C62.35
- (3) Marking code

## 3000 W Surface Mount Top Glass Transient Voltage Suppressor

### ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25 °C unless otherwise noted)

DEVICE TYPE	MC (3)	VBR @ IT (1) (V)			IR @ VR		IRM @ T <sub>J</sub> = 150°C (μA)	VCL @ IPP 10/1000 μs		RD 10/1000 μs (Ω)	VCL @ IPP 8/20 μs		RD 8/20 μs (Ω)	αT (%/°C)
		min	max	mA	(V)	(μA)		(V)	(A)		(V)	(A)		
3KSMC8.5CATG	CBT	9.44	10.4	1.0	8.5	10.0	50	14.4	208.4	0.020	19.9	1389	0.006	0.070
3KSMC10CATG	CBU	11.1	12.3	1.0	10	5.0	50	17.0	177	0.026	22.5	1217	0.008	0.075
3KSMC11CATG	CBV	12.2	13.5	1.0	11	5.0	50	18.2	165	0.028	23.7	1156	0.009	0.075
3KSMC12CATG	CBW	13.3	14.7	1.0	12	2.0	20	19.9	151	0.034	25.4	1078	0.010	0.080
3KSMC13CATG	CBX	14.4	15.9	1.0	13	2.0	20	21.5	140	0.040	27.0	1014	0.011	0.080
3KSMC14CATG	CBY	15.6	17.2	1.0	14	1.0	10	23.2	129	0.046	28.7	955	0.012	0.085
3KSMC15CATG	CBZ	16.7	18.5	1.0	15	1.0	10	24.4	123	0.048	30.0	910	0.013	0.085
3KSMC16CATG	CCE	17.8	19.7	1.0	16	1.0	10	26.0	115	0.055	31.5	870	0.013	0.085
3KSMC17CATG	CCF	18.9	20.9	1.0	17	1.0	10	27.6	109	0.061	33.1	827	0.015	0.075
3KSMC18CATG	CCG	20.0	22.1	1.0	18	1.0	10	29.2	103	0.069	35.0	790	0.016	0.090
3KSMC20CATG	CCH	22.2	24.5	1.0	20	1.0	10	32.4	92.6	0.085	37.5	730	0.018	0.090
3KSMC22CATG	CBA	24.4	26.9	1.0	22	2.0	10	35.5	84.5	0.102	40.5	680	0.020	0.095
3KSMC24CATG	CBB	26.7	29.5	1.0	24	2.0	10	38.9	77.1	0.122	43.9	630	0.023	0.095
3KSMC26CATG	CBC	28.9	31.9	1.0	26	2.0	10	42.1	71.3	0.143	47.0	600	0.025	0.095
3KSMC28CATG	CBD	31.1	34.4	1.0	28	2.0	10	45.4	66.1	0.166	50.0	560	0.028	0.095
3KSMC30CATG	CBE	33.3	36.8	1.0	30	2.0	15	48.4	62.0	0.187	53.0	530	0.030	0.095
3KSMC33CATG	CBF	36.7	40.6	1.0	33	2.0	15	53.3	56.3	0.226	58.0	490	0.035	0.100
3KSMC36CATG	CBG	40.0	44.2	1.0	36	2.0	20	58.1	51.6	0.269	62.7	437	0.042	0.100
3KSMC40CATG	CBH	44.4	49.1	1.0	40	2.0	20	64.5	46.5	0.331	69.0	396	0.050	0.105
3KSMC43CATG	CBI	47.8	52.8	1.0	43	2.0	20	69.4	43.2	0.384	73.9	371	0.057	0.105
3KSMC45CATG	CBJ	50.0	55.3	1.0	45	2.0	20	72.7	41.3	0.421	77.4	354	0.062	0.105
3KSMC48CATG	CBK	53.3	58.9	1.0	48	2.0	20	77.4	38.8	0.477	82.0	334	0.069	0.105
3KSMC51CATG	CBL	56.7	62.7	1.0	51	2.0	20	82.4	36.4	0.541	87.0	314	0.077	0.105
3KSMC54CATG	CBM	60.0	66.3	1.0	54	2.0	20	87.1	34.4	0.605	91.7	298	0.085	0.105
3KSMC58CATG	CBN	64.4	71.2	1.0	58	2.0	20	93.6	32.1	0.698	98.3	278	0.097	0.110
3KSMC60CATG	CBO	66.7	73.7	1.0	60	2.0	20	96.8	31.0	0.745	102	268	0.106	0.110
3KSMC64CATG	CBP	71.1	78.6	1.0	64	2.0	20	103	29.1	0.838	108	253	0.116	0.110
3KSMC70CATG	CBQ	77.8	86.0	1.0	70	2.0	20	113	26.5	1.019	118	232	0.138	0.110
3KSMC75CATG	CBR	83.3	92.1	1.0	75	2.0	20	121	24.8	1.165	126	217	0.156	0.110
3KSMC78CATG	CBS	86.7	95.8	1.0	78	2.0	20	126	23.8	1.269	132	207	0.175	0.110

#### Notes

- (1) Pulse test: t<sub>p</sub> ≤ 50 ms
- (2) Surge current waveform per fig. 3 and derate per fig. 2
  - All terms and symbols are consistent with ANSI/IEEE C62.35
- (3) Marking code

# 3000 W Surface Mount Top Glass Transient Voltage Suppressor

## Ratings and Characteristics (Ta 25 °C unless otherwise noted)

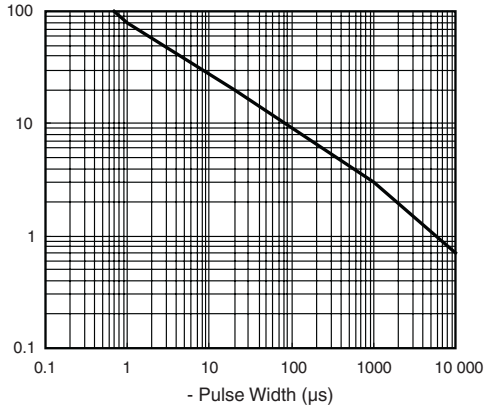


Fig. 1 - Peak Pulse Power Rating Curve

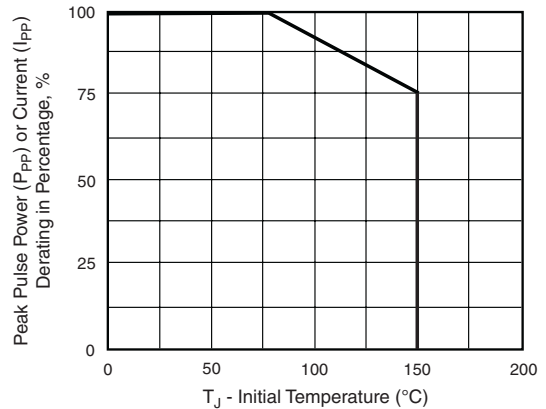


Fig. 2 - Pulse Power or Current vs. Initial Junction Temperature

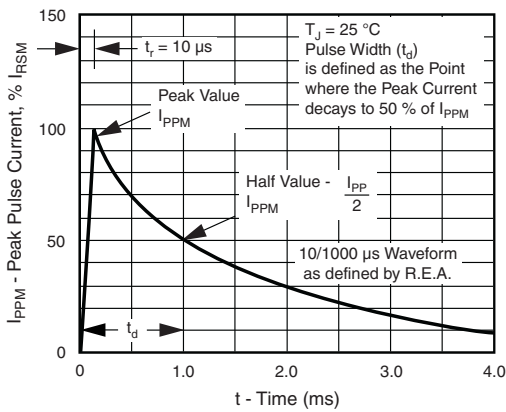


Fig. 3 - Pulse Waveform

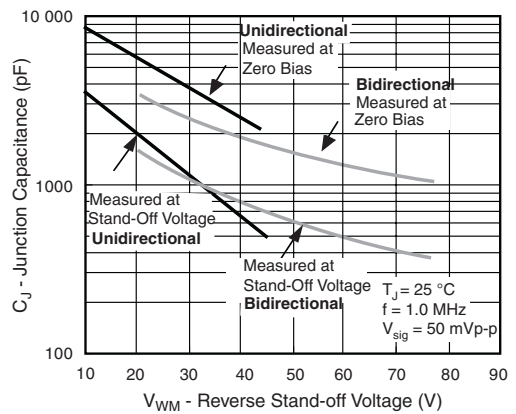


Fig. 4 - Typical Junction Capacitance

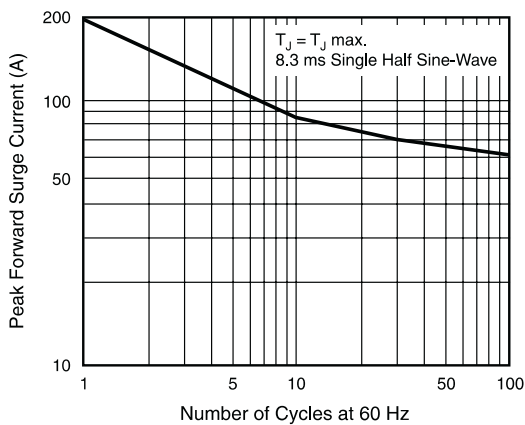


Fig. 5 - Maximum Non-Repetitive/Peak Forward Surge Current

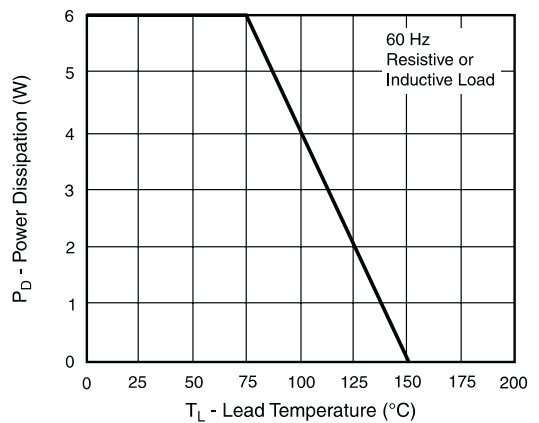


Fig. 6 - Power Derating Curve

**3000 W Surface Mount Top Glass Transient Voltage Suppressor**

**Revision History**

Date	Revision	Description of Changes
14-Dec-2012	0	Original Data Sheet
20-May-2014	1	Add: Dynamic resistance and Temperature coefficient specification.
18-Dec-2014	2	Add: New references
28-Jul-2015	3	Correct clamping values

**Disclaimer**

All product, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.

Fagor Electrónica, S.Coop., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Fagor"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Fagor makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Fagor disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Fagor's knowledge of typical requirements that are often placed on Fagor products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Fagor's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Fagor products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Fagor product could result in personal injury or death. Customers using or selling Fagor products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Fagor and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Fagor or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Fagor personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Fagor, Product names and markings noted herein may be trademarks of their respective owners.