
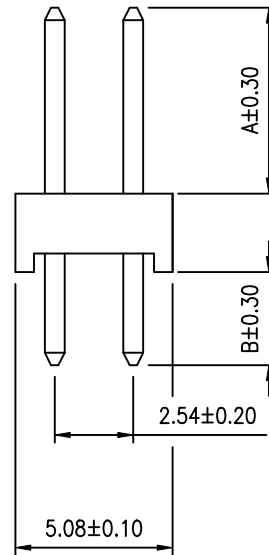


REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

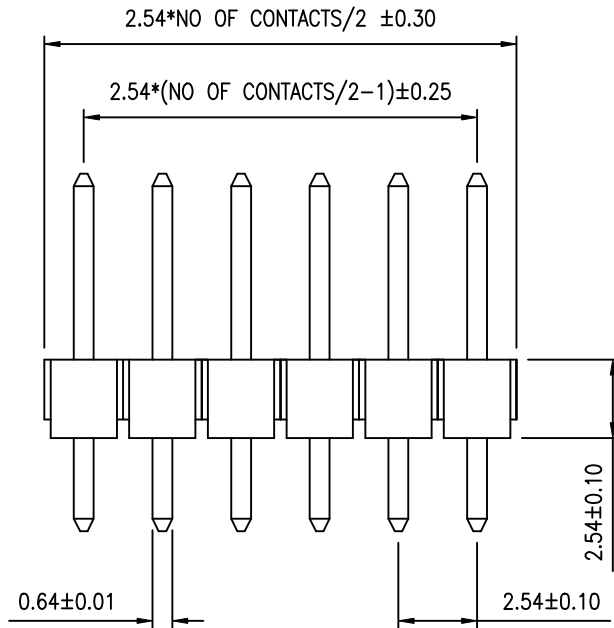


**SPECIFICATION**

- \* Current Rating: 3 A
- \* Withstanding Voltage: 800 VAC ( 1 min. )
- \* Insulation Resistance: 1000 Megohms min.
- \* Contact Resistance: 30 Milliohms max.
- \* Operating Temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- \* RETENTION FORCE: 750g MIN.

**MATERIAL**

- \* Contact: Brass , 0.64mm square post
- \* Insulator: PBT & 30% G.F.
- \* Plating: Gold


**ORDER INFORMATION**

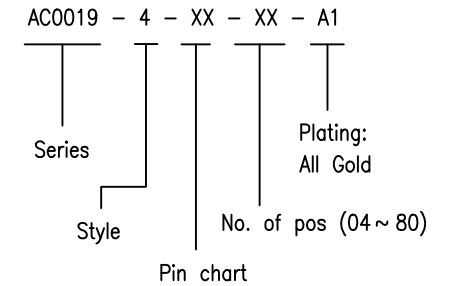

**Pin Chart**

Pin	A	B
01	6.00	3.00
02	6.20	3.10
03	6.00	3.30
04	7.00	3.40

Pin	A	B
05	4.00	4.00
06	14.00	3.30
07		
08		

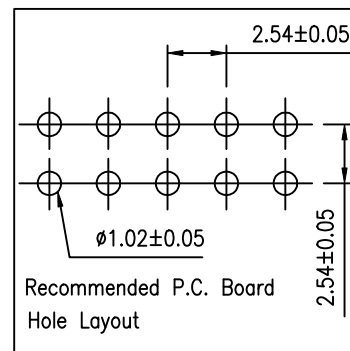

TECHWIN OPTO-ELECTRONICS CO., LTD.			
0.0±	SCALE:	TITLE:	PART NO:
0.00±	UNIT:	2.54X2.54MM (.100"*.100") Pin	APP BY:
0.000±	MM	HEADER Dual Row	CHK BY:
		MATL: PBT + 30% GF	DR BY: 張金枝
		DWG. NO. A204A	