
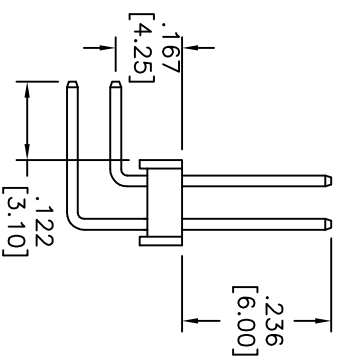
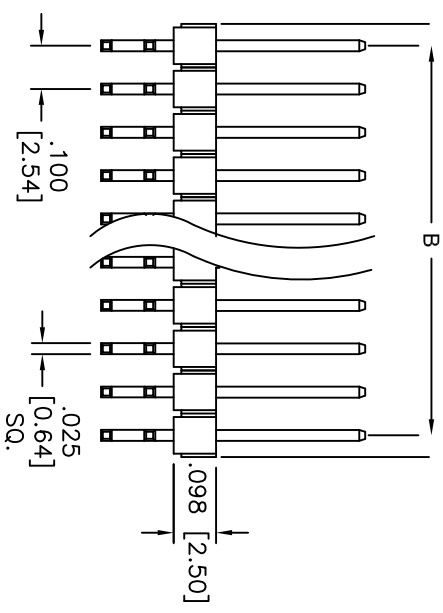
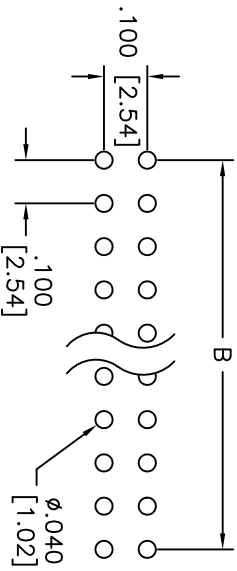


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/11/11	

APPROVED: _____

DATE: _____ TITLE: _____

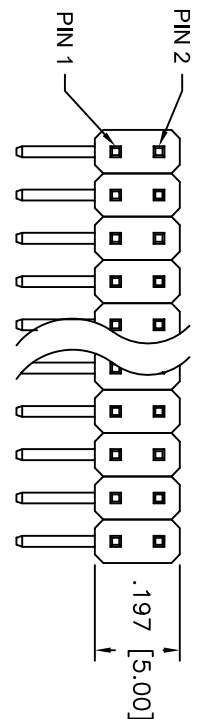

A = .100 [2.54] X No. of Positions.
 B = .100 [2.54] X No. of Spaces.

SPECIFICATIONS:

Material: Insulator: PBT, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: Matte Tin over Nickel underplate overall

Electrical: Operating voltage: 250 VAC max

Current rating: 3 Amps max

Contact resistance: 20 mohms max. Initial

Insulation resistance: 5000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating: Operating temperature: -55°C to +105°C

Environmental: Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] DUAL ROW PIN HEADER
 MATTE TIN PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLES	
.X	± .10	ØXX	± .10		
.XX	± .020	ØXXX	± .015		
.XXX	± .015	ØXXX	± .010		
APPROVALS		DATE			
DRAWN	AY	1/11/11			
CHECKED	JL	1/11/11			
APPROVED					
SIZE	PART NO.	REV.			
X	PH2RA-XX-MT-.236/1.22/1.67	-			
REF:	S00039T	SCALE:	NTS	SHEET	1 OF 1