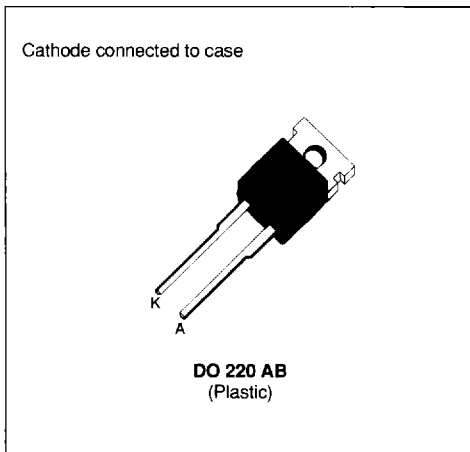


**FAST RECOVERY RECTIFIER DIODE**

- VERY HIGH REVERSE VOLTAGE CAPABILITY
- VERY LOW REVERSE RECOVERY TIME
- VERY LOW SWITCHING LOSSES
- LOW NOISE TURN-OFF SWITCHING

**SUITABLE APPLICATIONS**

- FREE WHEELING DIODE IN CONVERTERS AND MOTOR CONTROL CIRCUITS
- RECTIFIER IN S.M.P.S.


**ABSOLUTE RATINGS** (limiting values)

Symbol	Parameter	Value	Unit
$V_{RRM}$	Repetitive Peak Reverse Voltage	1000	V
$V_{RSM}$	Non Repetitive Peak Reverse Voltage	1000	V
$I_{FRM}$	Repetitive Peak Forward Current	$t_p \leq 10\mu s$	A
$I_{F(RMS)}$	RMS Forward Current	16	A
$I_{F(AV)}$	Average Forward Current	$T_{case} = 115^\circ C$ $\delta = 0.5$	A
$I_{FSM}$	Surge non Repetitive Forward Current	$t_p = 10ms$ Sinusoidal	A
P	Power Dissipation	$T_{case} = 115^\circ C$	W
$T_{stg}$ $T_j$	Storage and Junction Temperature Range	- 40 to + 150	$^\circ C$

**THERMAL RESISTANCE**

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	Junction-case	2	$^\circ C/W$

**ELECTRICAL CHARACTERISTICS**

**STATIC CHARACTERISTICS**

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
$I_R$	$T_j = 25^\circ\text{C}$	$V_R = V_{R\text{RM}}$			35	$\mu\text{A}$
	$T_j = 100^\circ\text{C}$				2	$\text{mA}$
$V_F$	$T_j = 25^\circ\text{C}$	$I_F = 8\text{A}$			1.9	$\text{V}$
	$T_j = 100^\circ\text{C}$				1.8	

**RECOVERY CHARACTERISTICS**

Symbol	Test Conditions			Min.	Typ.	Max.	Unit
$t_{rr}$	$T_j = 25^\circ\text{C}$	$I_F = 1\text{A}$	$di_F/dt = -15\text{A}/\mu\text{s}$	$V_R = 30\text{V}$		155	$\text{ns}$
$t_{rr}$		$I_F = 0.5\text{A}$	$I_R = 1\text{A}$	$I_{rr} = 0.25\text{A}$		65	

**TURN -OFF SWITCHING CHARACTERISTICS (Without Series Inductance)**

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
$t_{IRM}$	$di_F/dt = -32\text{A}/\mu\text{s}$	$V_{CC} = 200\text{V}$ $L_p \leq 0.05\mu\text{H}$ See Figure 1			200	$\text{ns}$
	$di_F/dt = -64\text{A}/\mu\text{s}$				120	
$I_{RM}$	$di_F/dt = -32\text{A}/\mu\text{s}$				5.5	$\text{A}$
	$di_F/dt = -64\text{A}/\mu\text{s}$				6	


**TURN -OFF OVERVOLTAGE COEFFICIENT (With Series Inductance)**

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
$C = \frac{V_{RP}}{V_{CC}}$	$T_j = 100^\circ\text{C}$ $di_F/dt = -8\text{A}/\mu\text{s}$	$V_{CC} = 200\text{V}$ $L_p = 12\mu\text{H}$ $I_F = I_{F(AV)}$ See Figure 2			4.5	

To evaluate the conduction losses use the following equations :

$$V_F = 1.47 + 0.041 I_F \quad P = 1.47 \times I_{F(AV)} + 0.041 I_{F(RMS)}^2$$

**PACKAGE MECHANICAL DATA : DO 220 AB Plastic**

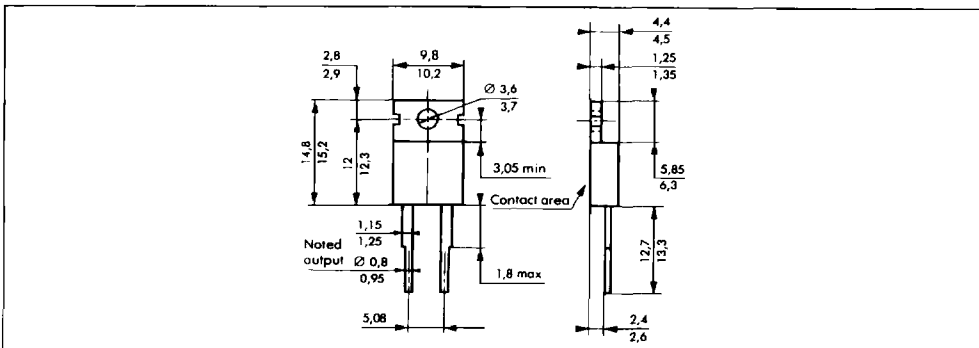

Cooling method : by conduction (method C)  
 Marking : type number  
 Weight : 2.42g  
 Recommended torque value : 80cm.N  
 Maximum torque value : 100cm.N

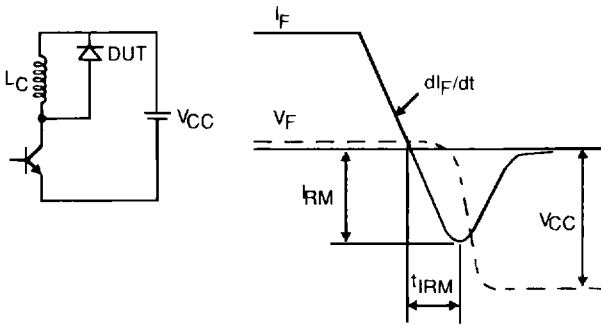


Figure 1 : Turn-off switching characteristics (without series inductance).

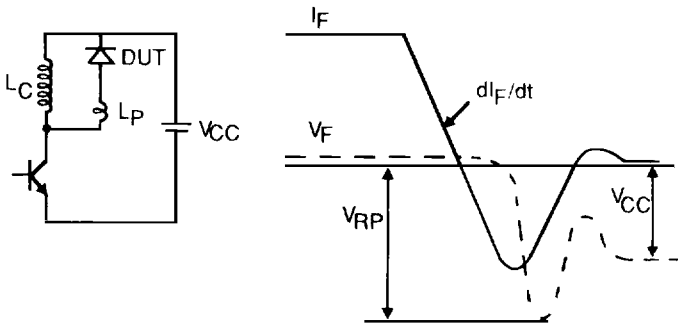


Figure 2 : Turn-off switching characteristics (with series inductance).