
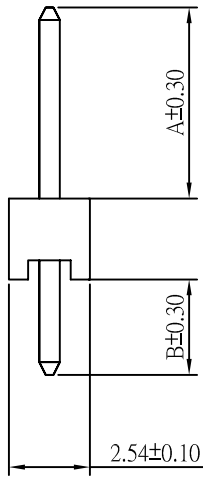
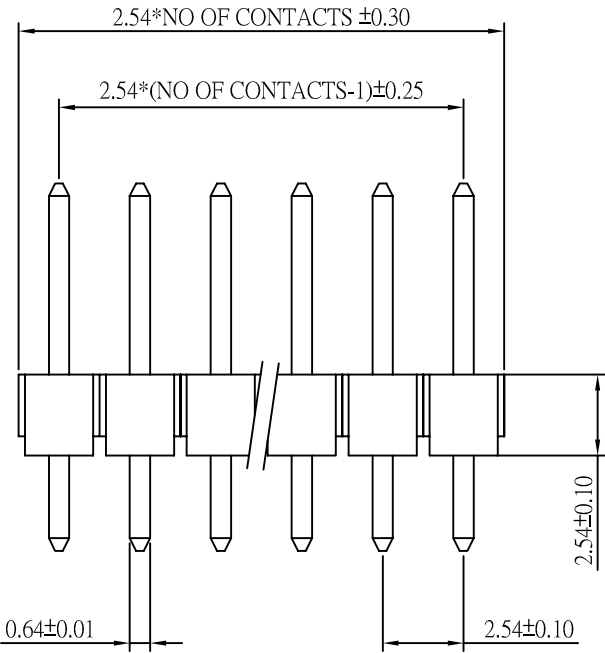


CUSTOMER COPY

ORDER INFORMATION

184 10 XX XX X

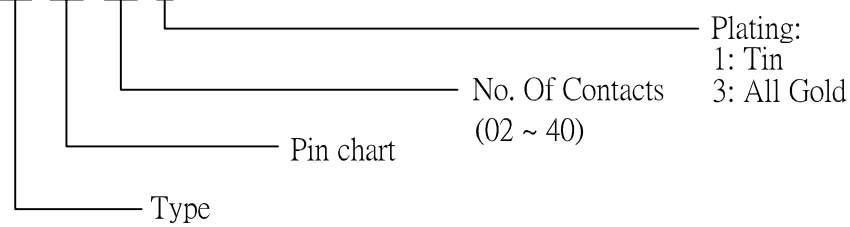

REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

MATERIAL


- \* Contact: Brass , 0.64mm square post
- \* Insulator: High temperature plastic
- \* Plating: Gold

SPECIFICATION

- \* Current Rating: 3 A
- \* Withstanding Voltage: 800 VAC ( 1 min. )
- \* Insulation Resistance: 1000 Megohms min.
- \* Contact Resistance: 30 Milliohms max.
- \* Operating Temperature: -40°C to +85°C
- \* RETENTION FORCE 750g MIN.

Pin Chart

NO.	A	B	NC PIN
00	6.00	3.00	P5
01	5.50	2.00	P7.8.9.10
02	6.00	3.00	P2
03	6.00	3.00	P4
04	6.00	3.00	P1

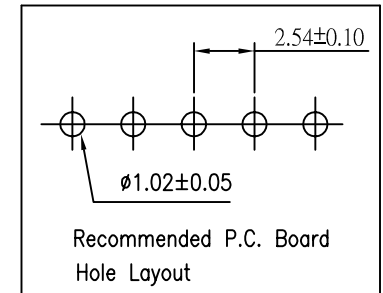

		<b>ACMELUX CO., LTD.</b>	
		TEL:886-2-85124595 FAX:886-2-85124322	
0.0±	SCALE:	TITLE: 2.54MM (.100") Center Pin HEADER Single Row(NC PIN)	PART NO: 111100
0.00±	UNIT:		APP BY:
0.000±	MM		CHK BY:
		MATL:	DR BY: JACK LIN
		DWG. NO. C18410XXXXX	