
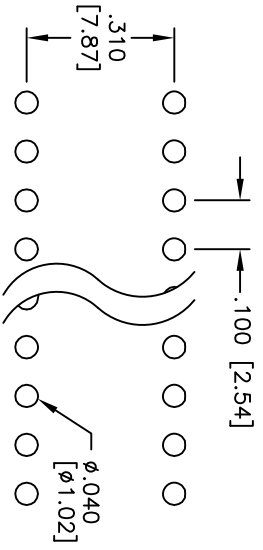


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/17/04	

APPROVED: _____
 DATE: _____ TITLE: _____

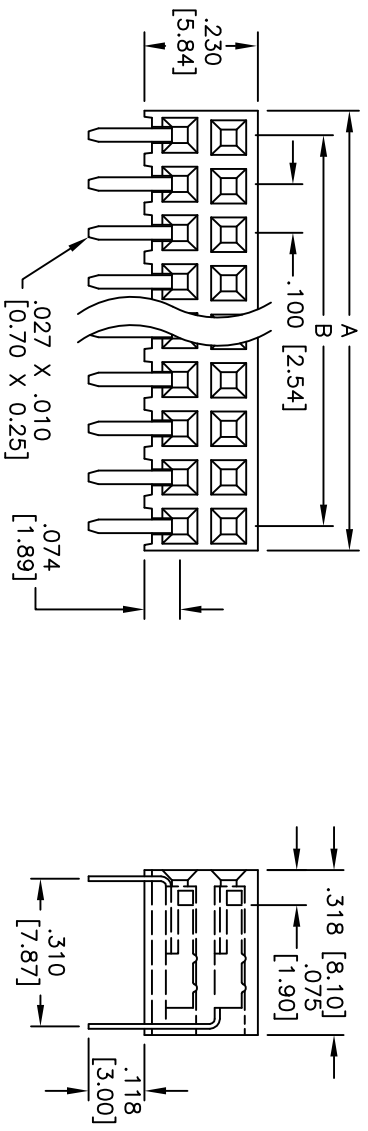

A = .100 [2.54] X No. of Positions
 B = .100 [2.54] X No. of Spaces

RECOMMENDED
 PCB LAYOUT

SPECIFICATIONS:

- Material: PBT, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: 15u" Gold over Nickel underplate on contact area, Tin over Copper underplate on solder tails
- Electrical:
 - Operating voltage: 250 VAC max
 - Current rating: 3 Amps max
 - Insulation resistance: 5000 Mohms min @ 500 VDC
 - Dielectric withstanding voltage: 1000 VAC for 1 minute
- Temperature Rating:
 - Operating temperature: -40°C to +105°C
- Environmental:
 - Lead free, RoHS compliant.
 - Recommended soldering temp: 235°C for 5 sec.

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RECEPTACLE STRIP, .100 DUAL ROW
 SIDE ENTRY, 15u" SEL GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	
.X	± .10
.XX	± .020
.XXX	± .015
.XXX	± .015
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	RS2BR-XX-SG-15	-
REF:	SCALE: NTS	SHEET 1 OF 1