


PRODUCT NUMBER  
SEE TABLE

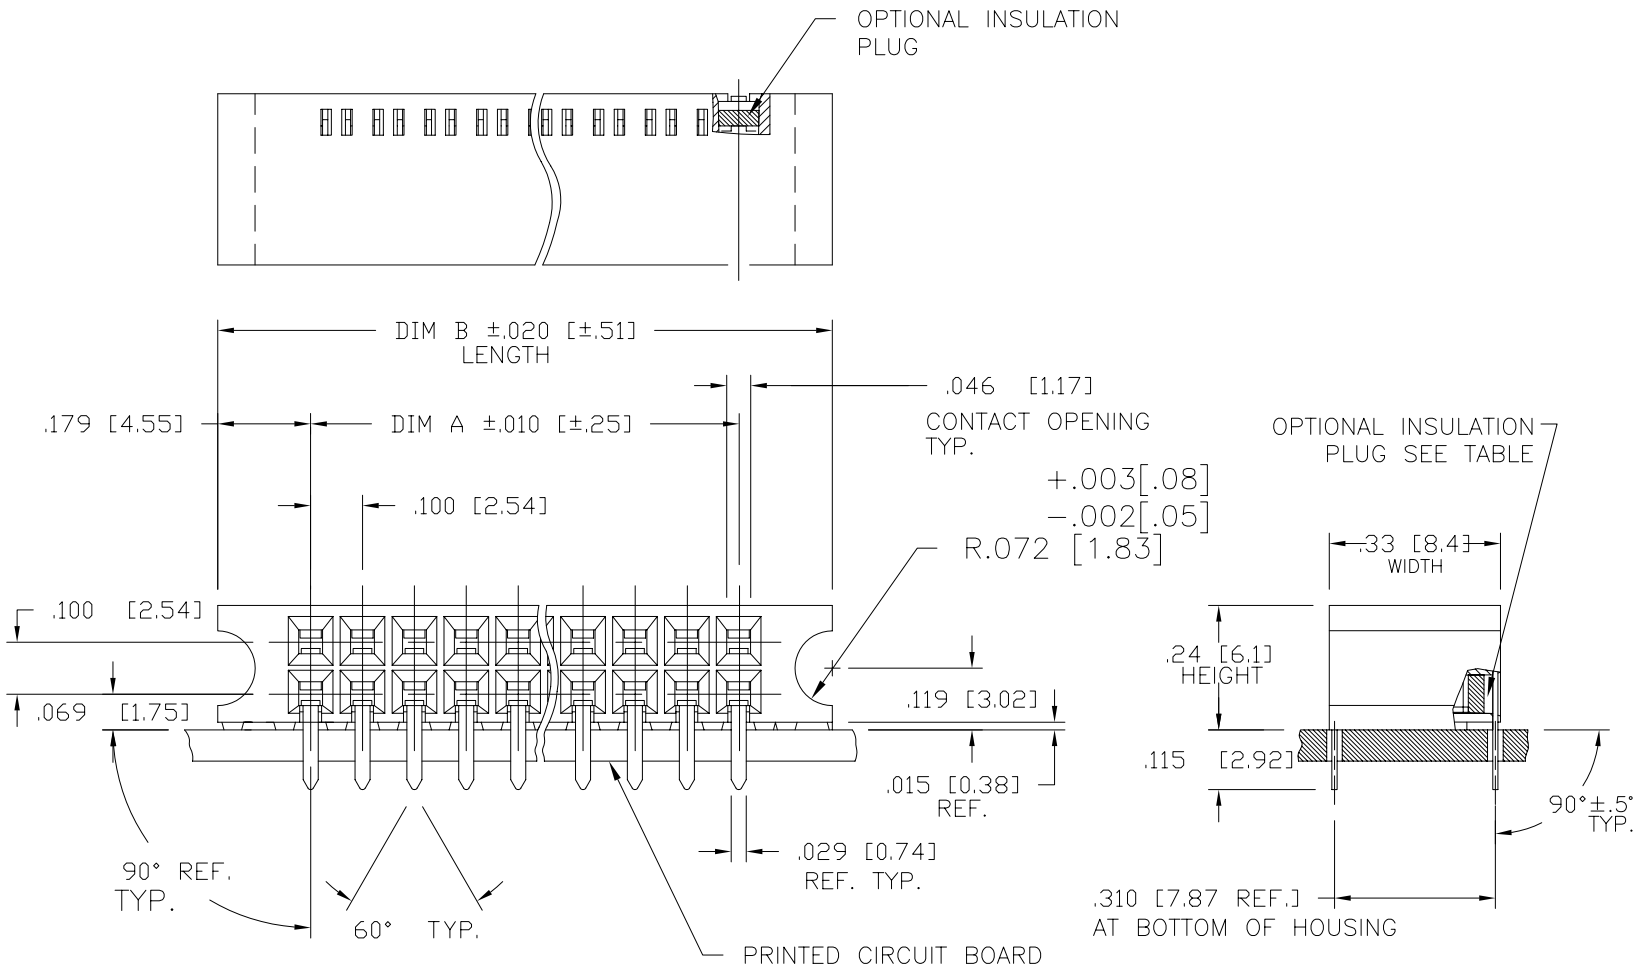

FCIconnect.com

Copyright FCI

mat'l. code		surface		tolerance		projection		product family	
-		ISO 1302 ✓		ISO 406 ISO 1101		⊕		CARD CONN	
ltr	ecn no	dr	date	tolerances unless otherwise specified		INCH/MM		title	
B	v50330	LSS	4/12/95	angles	linear	.xx ±.01/3		GUIDE PIN	
C	v70454	LSS	5/30/97			.xxx ±.005/.13		CARD CONNECTOR	
D	v71003	JM	10/12/97	σ±2'		.xxxx ±.0020/.051		scale 3:1	
E	v02512	AZ	10/18/00	dr	L. SANDERS	4/12/95		dwg no	
F	M05-0181	ERE	09/05/05	enfr	H. SUNDY	4/12/95		sheet 1 of 4 size	
G	M06-0117	ERE	06/07/06	chr	H. SUNDY	4/12/95		93112 A3	
H	M07-0137	MHT	2/26/07	appd	H. SUNDY	4/12/95		type Product Customer Drawing	
sheet	revision	H	H	H	H				
index	sheet	1	2	3	4				

form: A3

PRODUCT NUMBER

SEE TABLE

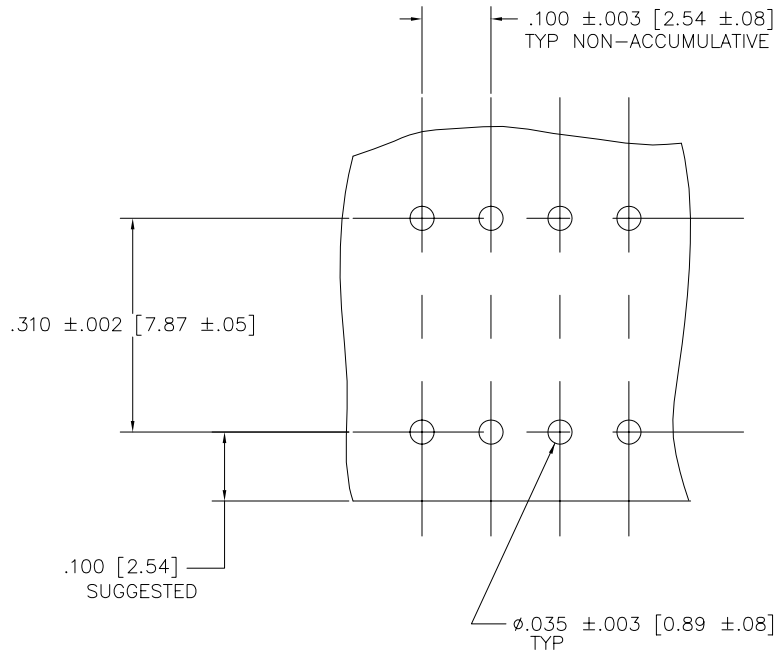


FIGURE 1  
SCALE 10/1

NOTES:

- HOUSING MATERIAL:  
FILLED HIGH TEMPERATURE NYLON  
PER UL 94V-0  
COLOR: BLACK
- TERMINAL MATERIAL:  
BODY: BRASS .010/.25 THICK  
SPRING: BeCu HEAT TREATED  
BODY PLATING:  
30 MICROINCH GOLD/.76 MICRON OVER 50 MICROINCH  
NICKEL/1.27 MICRON IN CONTACT AREA.  
GOLD FLASH OVER REMAINDER OF BODY  
SPRING PLATING: GOLD FLASH  
SOLDER TAIL TO BE PLATED 100 MICROINCH 2.54 MICRON  
Sn ( NOTE 8) OVER 50 MICROINCH 1.27 MICRON NICKLE
- APPLICATION INFORMATION:  
A RECOMMENDED MOUNTING HOLE PATTERN IS SHOWN IN FIG."1"  
B ALL MATING PINS TO BE .025/.64 SQUARE ON TRUE CENTER OF GIVEN TERMINAL SPACINGS WITHIN .015/.38 DIA.  
C SUGGESTED MATING PIN LENGTH .350±.020/.8.89±.51.
- .003/.08 THICK TERMINAL SPRING FOR P/N GREATER THAN 50 POSITION.  
.0035 THICK TERMINAL SPRING FOR P/N LESS THAN 50 POSITION.
- ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
- THESE PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THIS PART WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 20 SECONDS IN A WAVE SOLDER, INFRA-RED OR VAPOR PHASE SOLDER PROCESS.
- "THIS PRODUCT HAS 100% TIN PLATING IN THE INTERFACE AND HAS NOT BEEN TESTED FOR WHISKER GROWTH IN ALL INTERCONNECT ENVIRONMENTS."



FCIconnect.com

Copyright FCI

mat'l. code		surface		tolerance		projection		product family	
-		ISO 1302 ✓		ISO 406 ISO 1101		⊕		CARD CONN	
ltr		ecn no/dr		date		tolerances unless otherwise specified		title	
H						.xx ±.01/.3 .xxx ±.005/.13 .xxxx ±.0020/.051		INCH/MM	
						scale 3:1		dwg no	
				dr L. SANDERS 4/12/95		FCI		sheet 2 of 4 size	
				enrg H. SUNDY 4/12/95				93112 A3	
				chr H. SUNDY 4/12/95				type Product Customer Drawing	
				appd H. SUNDY 4/12/95					
sheet index		revision sheet							

PRODUCT NUMBER	NO. OF POS.	DIM A	DIM B	INSULATION PLUG	LEAD FREE OPTION	
93112-005	2 X 5	.40/10.2	.758/19.25	NO	NOTE 5, 6	
-006	2 X 6	.50/12.7	.858/21.79			
-007	2 X 7	.60/15.2	.958/24.33			
-008	2 X 8	.70/17.8	1.058/26.87			
-009	2 X 9	.80/20.3	1.158/29.41			
-010	2 X 10	.90/22.9	1.258/31.95			
-011	2 X 11	1.00/25.4	1.358/34.49			
-012	2 X 12	1.10/27.9	1.458/37.03			
-013	2 X 13	1.20/30.5	1.558/39.57			
-014	2 X 14	1.30/33.0	1.658/42.11			
-015	2 X 15	1.40/35.6	1.758/44.65			
-016	2 X 16	1.50/38.1	1.858/47.19			
-017	2 X 17	1.60/40.6	1.958/49.73			
-018	2 X 18	1.70/43.2	2.058/52.27			
-019	2 X 19	1.80/45.7	2.158/54.81			
-020	2 X 20	1.90/48.3	2.258/57.35			
-021	2 X 21	2.00/50.1	2.358/59.89			
-022	2 X 22	2.10/53.3	2.458/62.43			
-023	2 X 23	2.20/55.9	2.558/64.97			
-024	2 X 24	2.30/58.4	2.658/67.51			
-025	2 X 25	2.40/61.0	2.758/70.05			
-026	2 X 26	2.50/63.5	2.858/72.59			
-027	2 X 27	2.60/66.0	2.958/75.13			
-028	2 X 28	2.70/68.6	3.058/77.67			
-029	2 X 29	2.80/71.1	3.158/80.21			
-030	2 X 30	2.90/73.7	3.258/82.75			
-031	2 X 31	3.00/76.2	3.358/85.29			
-032	2 X 32	3.10/78.7	3.458/87.83			
-033	2 X 33	3.20/81.3	3.558/90.37			
-034	2 X 34	3.30/83.8	3.658/92.91			
-035	2 X 35	3.40/86.4	3.758/95.45			
-036	2 X 36	3.50/88.9	3.858/97.99			
-037	2 X 37	3.60/91.4	3.958/100.53			
93112-038	2 X 38	3.70/94.0	4.058/103.07	NO		NOTE 5, 6

PRODUCT NUMBER	NO. OF POS.	DIM A	DIM B	INSULATION PLUG	LEAD FREE OPTION	
93112-039	2 X 39	3.80/96.5	4.158/105.61	NO	NOTE 5, 6	
-040	2 X 40	3.90/99.1	4.258/108.15			
-041	2 X 41	4.00/101.6	4.358/110.69			
-042	2 X 42	4.10/104.1	4.458/113.23			
-043	2 X 43	4.20/106.7	4.558/115.77			
-044	2 X 44	4.30/109.2	4.658/118.31			
-045	2 X 45	4.40/111.8	4.758/120.85			
-046	2 X 46	4.50/114.3	4.858/123.39			
-047	2 X 47	4.60/116.8	4.958/125.93			
-048	2 X 48	4.70/119.4	5.058/128.47			
-049	2 X 49	4.80/121.9	5.158/131.01			
-050	2 X 50	4.90/124.5	5.258/133.55			
-051	2 X 51	5.00/127.0	5.358/136.09			
-052	2 X 52	5.10/129.5	5.458/138.63			
-053	2 X 53	5.20/132.1	5.558/141.17			
-054	2 X 54	5.30/134.6	5.658/143.71			
-055	2 X 55	5.40/137.2	5.758/146.25			
-056	2 X 56	5.50/139.7	5.858/148.79			
-057	2 X 57	5.60/142.2	5.958/151.33			
-058	2 X 58	5.70/144.8	6.058/153.87			
-059	2 X 59	5.80/147.3	6.158/156.41			
-060	2 X 60	5.90/149.9	6.258/158.95			
-061	2 X 61	6.00/152.4	6.358/161.49			
-062	2 X 62	6.10/154.9	6.458/164.03			
-063	2 X 63	6.20/157.5	6.558/166.57			
-064	2 X 64	6.30/160.0	6.658/169.11			
93112-065	2 X 65	6.40/162.6	6.758/171.65	NO		NOTE 5, 6



FCIconnect.com

Copyright FCI

mat'l. code		surface		tolerance		projection		product family	
-		ISO 1302 ✓		ISO 406		⊕		CARD CONN	
ISO 1101		tolerances unless otherwise specified		linear		INCH/MM		title	
H		.xx ±.01/3		.xxx ±.005/13		scale 3:1		GUIDE PIN	
dr		L. SANDERS		4/12/95		FCI		CARD CONNECTOR	
enr		H. SUNDY		4/12/95		dwg no		sheet 3 of 4 size	
chr		H. SUNDY		4/12/95		93112		A3	
appd		H. SUNDY		4/12/95		type		Product Customer Drawing	
sheet index		revision sheet							

PRODUCT NUMBER	NO. OF POS.	DIM A	DIM B	INSULATION PLUG	LEAD FREE OPTION
93112-505	2 X 5	.40/10.2	.758/19.25	YES	NOTE 5, 6
-506	2 X 6	.50/12.7	.858/21.79		
-507	2 X 7	.60/15.2	.958/24.33		
-508	2 X 8	.70/17.8	1.058/26.87		
-509	2 X 9	.80/20.3	1.158/29.41		
-510	2 X 10	.90/22.9	1.258/31.95		
-511	2 X 11	1.00/25.4	1.358/34.49		
-512	2 X 12	1.10/27.9	1.458/37.03		
-513	2 X 13	1.20/30.5	1.558/39.57		
-514	2 X 14	1.30/33.0	1.658/42.11		
-515	2 X 15	1.40/35.6	1.758/44.65		
-516	2 X 16	1.50/38.1	1.858/47.19		
-517	2 X 17	1.60/40.6	1.958/49.73		
-518	2 X 18	1.70/43.2	2.058/52.27		
-519	2 X 19	1.80/45.7	2.158/54.81		
-520	2 X 20	1.90/48.3	2.258/57.35		
-521	2 X 21	2.00/50.1	2.358/59.89		
-522	2 X 22	2.10/53.3	2.458/62.43		
-523	2 X 23	2.20/55.9	2.558/64.97		
-524	2 X 24	2.30/58.4	2.658/67.51		
-525	2 X 25	2.40/61.0	2.758/70.05		
-526	2 X 26	2.50/63.5	2.858/72.59		
-527	2 X 27	2.60/66.0	2.958/75.13		
-528	2 X 28	2.70/68.6	3.058/77.67		
-529	2 X 29	2.80/71.1	3.158/80.21		
-530	2 X 30	2.90/73.7	3.258/82.75		
-531	2 X 31	3.00/76.2	3.358/85.29		
-532	2 X 32	3.10/78.7	3.458/87.83		
-533	2 X 33	3.20/81.3	3.558/90.37		
-534	2 X 34	3.30/83.8	3.658/92.91		
-535	2 X 35	3.40/86.4	3.758/95.45		
-536	2 X 36	3.50/88.9	3.858/97.99		
-537	2 X 37	3.60/91.4	3.958/100.53		
93112-538	2 X 38	3.70/94.0	4.058/103.07	YES	NOTE 5, 6

PRODUCT NUMBER	NO. OF POS.	DIM A	DIM B	INSULATION PLUG	LEAD FREE OPTION
93112-539	2 X 39	3.80/96.5	4.158/105.61	YES	NOTE 5, 6
-540	2 X 40	3.90/99.1	4.258/108.15		
-541	2 X 41	4.00/101.6	4.358/110.69		
-542	2 X 42	4.10/104.1	4.458/113.23		
-543	2 X 43	4.20/106.7	4.558/115.77		
-544	2 X 44	4.30/109.2	4.658/118.31		
-545	2 X 45	4.40/111.8	4.758/120.85		
-546	2 X 46	4.50/114.3	4.858/123.39		
-547	2 X 47	4.60/116.8	4.958/125.93		
-548	2 X 48	4.70/119.4	5.058/128.47		
-549	2 X 49	4.80/121.9	5.158/131.01		
-550	2 X 50	4.90/124.5	5.258/133.55		
-551	2 X 51	5.00/127.0	5.358/136.09		
-552	2 X 52	5.10/129.5	5.458/138.63		
-553	2 X 53	5.20/132.1	5.558/141.17		
-554	2 X 54	5.30/134.6	5.658/143.71		
-555	2 X 55	5.40/137.2	5.758/146.25		
-556	2 X 56	5.50/139.7	5.858/148.79		
-557	2 X 57	5.60/142.2	5.958/151.33		
-558	2 X 58	5.70/144.8	6.058/153.87		
-559	2 X 59	5.80/147.3	6.158/156.41		
-560	2 X 60	5.90/149.9	6.258/158.95		
-561	2 X 61	6.00/152.4	6.358/161.49		
-562	2 X 62	6.10/154.9	6.458/164.03		
-563	2 X 63	6.20/157.5	6.558/166.57		
-564	2 X 64	6.30/160.0	6.658/169.11		
93112-565	2 X 65	6.40/162.6	6.758/171.65	YES	NOTE 5, 6

mat'l. code		surface		tolerance		projection		product family	
-		ISO 1302 ✓		ISO 406		⊕		CARD CONN	
ISO 1101		tolerances unless otherwise specified		.xx ±.01/.3		INCH/MM		title	
H		angles		.xxx ±.005/.13		scale 3:1		GUIDE PIN	
		linear		.xxxx ±.0020/.051		FCJ		CARD CONNECTOR	
		dr		L. SANDERS 4/12/95		dwg no		sheet 4 of 4 size	
		enr		H. SUNDY 4/12/95		93112		A3	
		chr		H. SUNDY 4/12/95		type		Product Customer Drawing	
		appd		H. SUNDY 4/12/95					
sheet index		revision sheet							

form: A3