

SEK-19 SV HT MA STD ANG29 RLG 14P PLS4

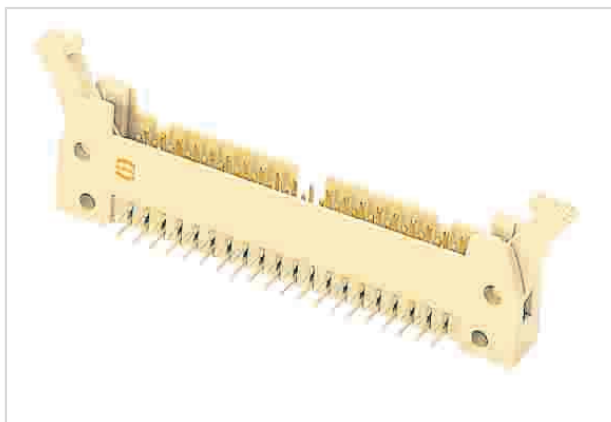


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---|
| Part number | 09 19 514 5903 |
| Specification | SEK-19 SV HT MA STD ANG29 RLG 14P PLS4 |
| HARTING eCatalogue | https://b2b.harting.com/09195145903 |

Identification

| | |
|----------------------------|----------------|
| Category | Connectors |
| Series | SEK Standard |
| Element | Male connector |
| Description of the contact | Angled |

Version

| | |
|--------------------|------------------------------------|
| Termination method | Reflow soldering termination (THR) |
| Connection type | PCB to cable |
| Number of contacts | 14 |
| Termination length | 2.9 mm |
| Locking type | With long levers |

Technical characteristics

| | |
|------------------------------------|---|
| Contact rows | 2 |
| Contact spacing (termination side) | 2.54 mm |
| Rated current | 1 A |
| Insulation resistance | $>10^9 \Omega$ |
| Contact resistance | $\leq 20 \text{ m}\Omega$ |
| Limiting temperature | -55 ... +125 °C (during reflow soldering max. +240 °C for 60 s) |
| Insertion and withdrawal force | $\leq 28 \text{ N}$ |
| Performance level | NM 30 (S4) |
| Mating cycles | ≥ 250 |
| Test voltage $U_{r,m.s.}$ | 1 kV |



Pushing Performance
Since 1945

Technical characteristics

| | |
|-----------------|----------------------|
| Isolation group | II (400 ≤ CTI < 600) |
|-----------------|----------------------|

Material properties

| | |
|---|--|
| Material (insert) | Thermoplastic resin (PCT) |
| Colour (insert) | Beige |
| Material (contacts) | Copper alloy |
| Surface (contacts) | Noble metal over Ni Mating side Sn over Ni Termination side |
| Layer thickness | ≥0.76 µm |
| Layer thickness | ≥30 µinch |
| Material flammability class acc. to UL 94 | V-0 |
| RoHS | compliant |
| ELV status | compliant |
| China RoHS | e |
| REACH Annex XVII substances | Not contained |
| REACH ANNEX XIV substances | Not contained |
| REACH SVHC substances | Not contained |

Specifications and approvals

| | |
|----------------|--|
| Specifications | IEC 60603-13 |
| UL / CSA | UL 1977 ECBT2.E102079 CSA-C22.2 No. 182.3 ECBT8.E102079 |

Commercial data

| | |
|----------------|--|
| Packaging size | 1 |
| GTIN | 5713140214392 |
| eCl@ss | 27460201 PCB connector (board connector) |

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Temperature raise
- ② Derating curve
- ③ Derating curve 80%

Cross section of solder termination

