


1.25mm Terminal / Housing

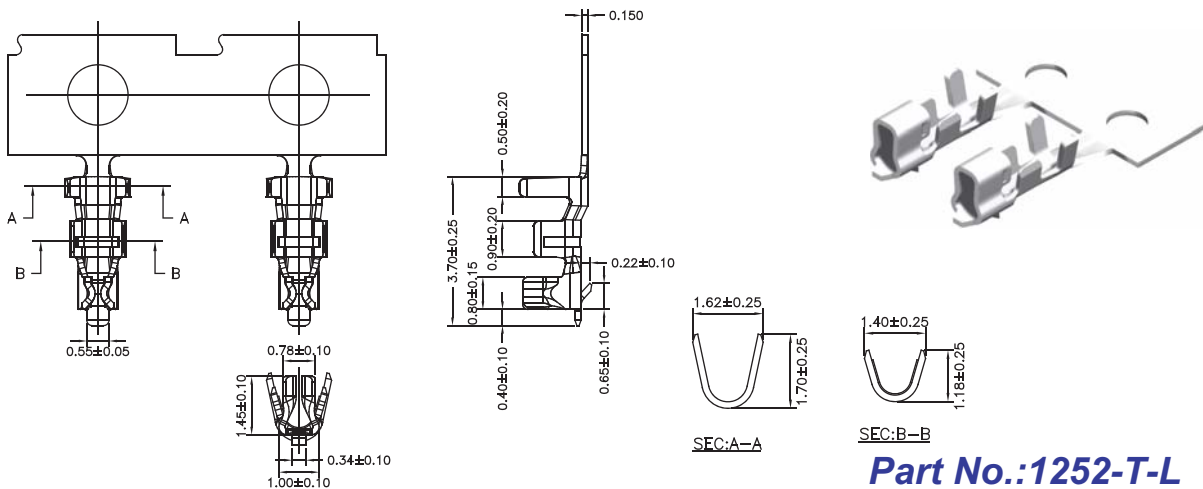


Part No.:1252-T-L

Part No.	Wire Range	Insulation O.D.	Material	Finish
1252-TTP-L	AWG#26-#30	1.00mm(max)	Phosphor Bronze	Tin Plated
1252-TGP-L	AWG#26-#30	1.00mm(max)	Phosphor Bronze	Gold Plated

Specifications

Current Rating: 1A AC,DC
 Voltage Rating: 150V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 30mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstanding Voltage: 500V AC/minute
 Material:Nylon 66,UL94V-0

Part No.	Dimensions	
	A	B
1252H-205W-L	5.00	10.40
1252H-207W-L	7.50	12.90
1252H-210W-L	11.25	16.65
1252H-215W-L	17.50	22.90
1252H-220W-L	23.75	29.15

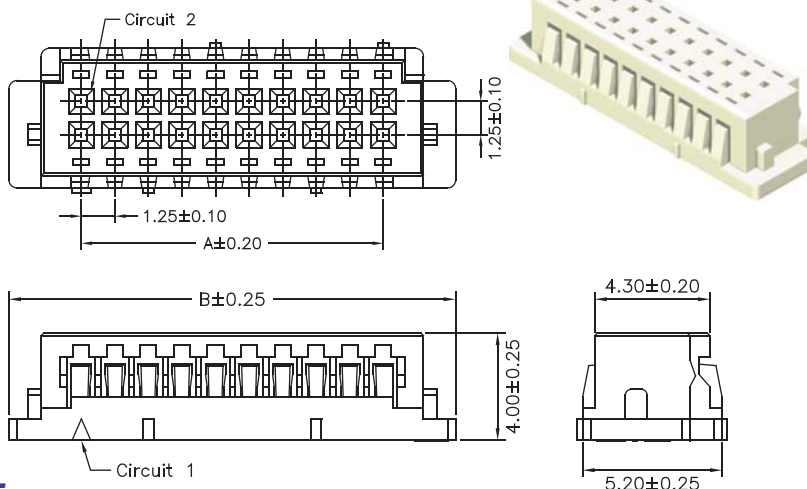


Part No.:1252H-2XXW-L

Specifications

Current Rating: 1A AC,DC
 Voltage Rating: 150V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 30mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstanding Voltage: 500V AC/minute
 Material:Nylon 66,UL94V-0

Part No.	Dimensions	
	A	B
1252H-102W-L	1.25	4.15
1252H-103W-L	2.50	5.40
1252H-104W-L	3.75	6.65
1252H-105W-L	5.00	7.90
1252H-106W-L	6.25	9.15
1252H-107W-L	7.50	10.40
1252H-108W-L	8.75	11.65
1252H-109W-L	10.00	12.90
1252H-110W-L	11.25	14.15
1252H-111W-L	12.50	15.40
1252H-112W-L	13.75	16.65
1252H-113W-L	15.00	17.90
1252H-114W-L	16.25	19.15
1252H-115W-L	17.50	20.40

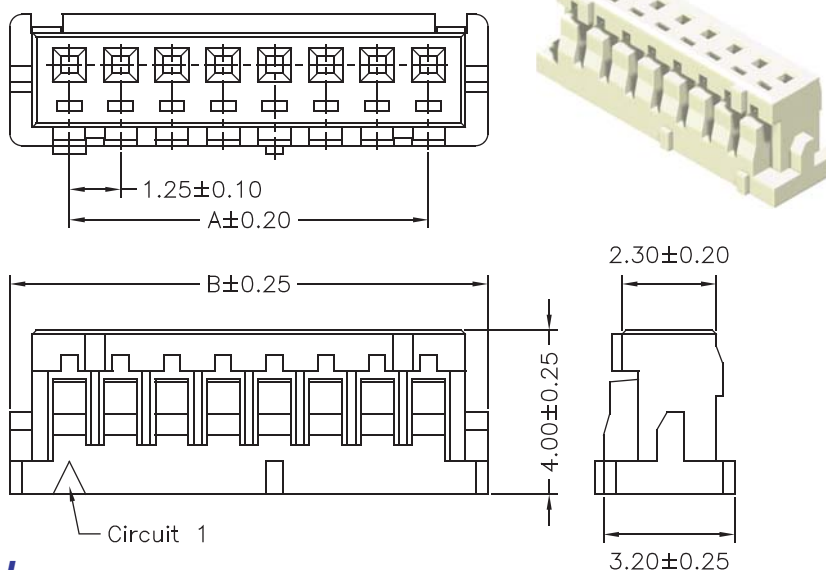

Part No.:1252H-1XXW-L