


Single and Dual Row Single Beam Vertical Mount PCB Receptacles

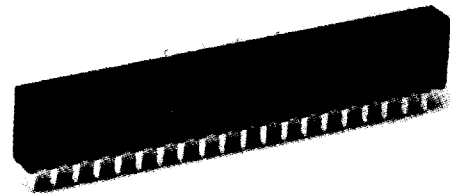

Features:

- Interchangeable with connectors of similar design.
- .100" (2.54 mm) center line spacing.
- Mates with .025" (.65 mm) square or round pin.
- BeCu contact.
- Selective gold plating.
- Consult factory for specifications.

Contacts:

Copper Alloy

Plating:



TLG - 30µ" gold on mating surface,
100µ" tin-lead over 50µ" minimum
nickel over 10µ" copper flash

Body Material:

High Temp. Glass Filled Thermoplastic Polyester (P.E.T.), U.L. Rated 94V-O,
-60°C to 140°C (-76°F to 284°F)

Single Row Vertical Mount PCB Receptacle



BE XXX - 116 TLG

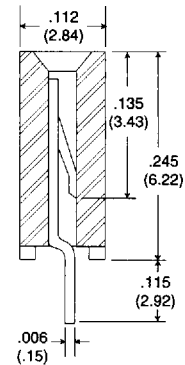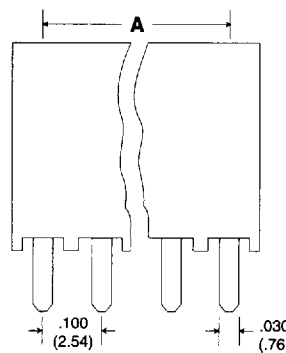

Available in lengths 2 to 50
A = Pitch .100" (2.54 mm) x Number of Terminals in Row - 1

Dual Row Vertical Mount PCB Receptacle

BE XXX - 119 TLG

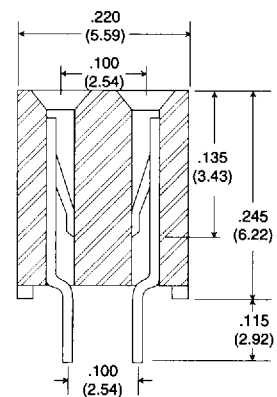

Available in lengths 2 to 65
A = Pitch .100" (2.54 mm) x Number of Terminals in Row - 1

How To Order

