


### Features

- Guard Ring Die Construction for Transient Protection
- Ideally Suited for Automatic Assembly
- Low Power Loss, High Efficiency
- Surge Overload Rating to 100A Peak
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Application
- **Available in Lead Free Finish/RoHS Compliant Version (Note 4)**

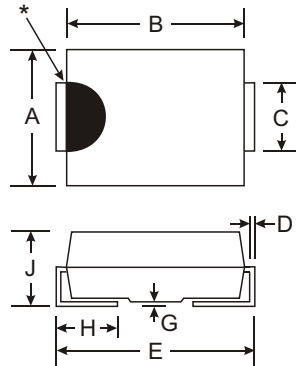

Dim	SMA		SMB		SMC	
	Min	Max	Min	Max	Min	Max
A	2.29	2.92	3.30	3.94	5.59	6.22
B	4.00	4.60	4.06	4.57	6.60	7.11
C	1.27	1.63	1.96	2.21	2.75	3.18
D	0.15	0.31	0.15	0.31	0.15	0.31
E	4.80	5.59	5.00	5.59	7.75	8.13
G	0.10	0.20	0.10	0.20	0.10	0.20
H	0.76	1.52	0.76	1.52	0.76	1.52
J	2.01	2.30	2.00	2.40	2.00	2.40
<b>All Dimensions in mm</b>						

### Mechanical Data

- Case: SMA/SMB/SMC
- Case Material: Molded Plastic. UL Flammability Classification 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Solder Plated Terminal - Solderable per MIL-STD-202, Method 208
- Also Available in Lead Free Plating (Matte Tin Finish). Please See Ordering Information, Note 6, on Page 3
- Polarity: Cathode Band
- Marking: Type Number (See Page 3)
- Approximate Weight: SMA 0.064 grams  
SMB 0.093 grams  
SMC 0.21 grams

"A" Suffix Designates SMA Package

"B" Suffix Designates SMB Package

No Suffix Designates SMC Package


\*: Note: Device may have a semicircular indentation/notch on one side of the device (as shown).

### Maximum Ratings and Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified


Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

Characteristic	Symbol	B320/A/B	B330/A/B	B340/A/B	B350/A/B	B360/A/B	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	20	30	40	50	60	V
RMS Reverse Voltage	V <sub>R(RMS)</sub>	14	21	28	35	42	V
Average Rectified Output Current @ T <sub>T</sub> = 100°C	I <sub>O</sub>	3.0					A
Non-Repetitive Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	100					A
Forward Voltage (Note 3) @ I <sub>F</sub> = 3.0A	V <sub>FM</sub>	0.50		0.70			V
Peak Reverse Current @ T <sub>A</sub> = 25°C at Rated DC Blocking Voltage (Note 3) @ T <sub>A</sub> = 100°C	I <sub>RM</sub>	0.5 20					mA
Typical Capacitance (Note 2)	C <sub>T</sub>	250					pF
Typical Thermal Resistance, Junction to Terminal	R <sub>θJT</sub>	10					°C/W
Typical Thermal Resistance, Junction to Ambient (Note 1)	R <sub>θJA</sub>	50					°C/W
Operating Temperature Range	T <sub>j</sub>	-55 to +125					°C
Storage Temperature Range	T <sub>STG</sub>	-55 to +150					°C


- Notes:
1. Thermal Resistance: Junction to terminal, unit mounted on PC board with 5.0 mm<sup>2</sup>, 0.013 mm thick, copper pad as heat sink.
  2. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.
  3. Short duration test pulse used to minimize self-heating effect.
  4. RoHS revision 13.2.2003. Glass and High Temperature Solder Exemptions Applied, see *EU Directive Annex Notes 5 and 7*.

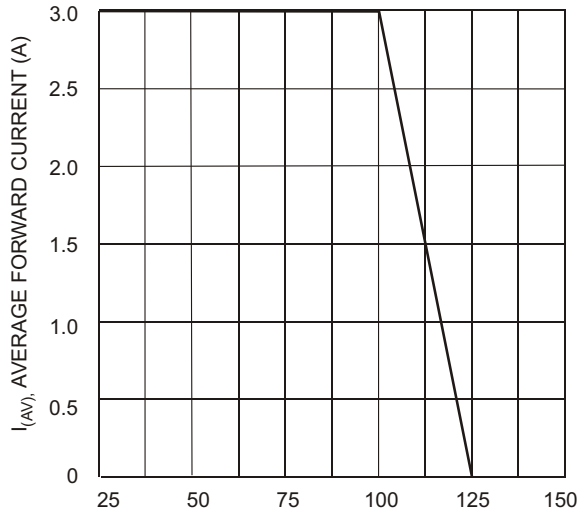

$T_T$ , TERMINAL TEMPERATURE ( $^{\circ}\text{C}$ )  
Fig. 1 Forward Current Derating Curve

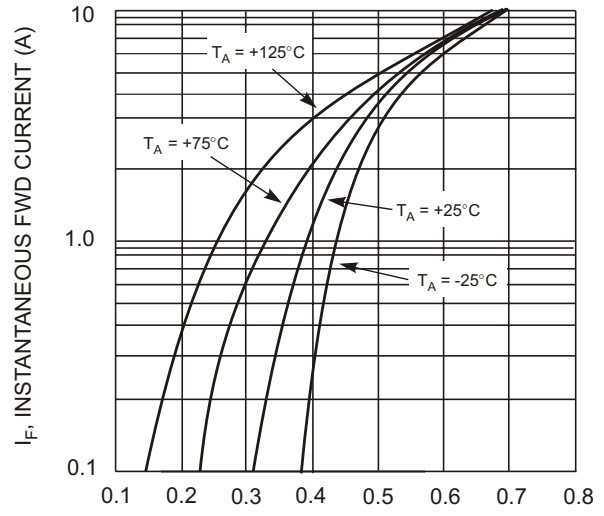

$V_F$ , INSTANTANEOUS FORWARD VOLTAGE (V)  
Fig. 2 Typical Forward Characteristics - B320/A/B thru B340/A/B

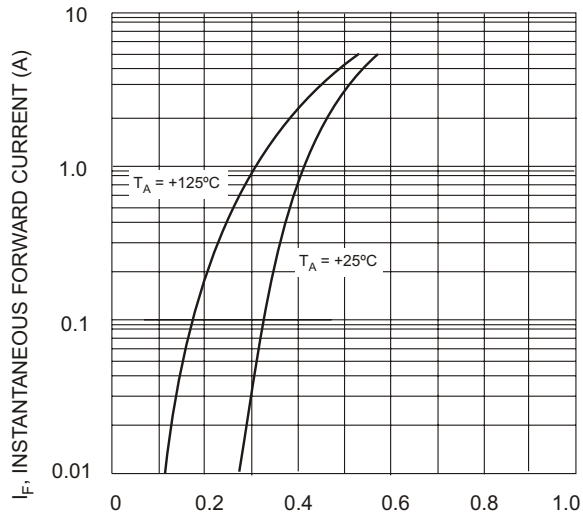

$V_F$ , INSTANTANEOUS FORWARD VOLTAGE (V)  
Fig. 3 Typ. Forward Characteristics - B350/A/B thru B360/A/B



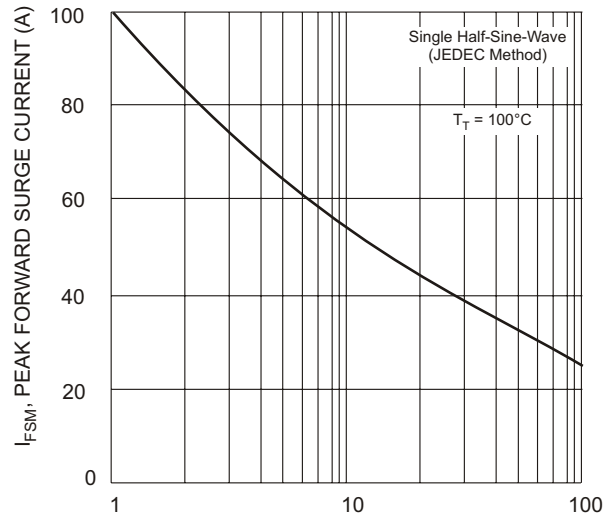



Fig. 4 Max Non-Repetitive Peak Fwd Surge Current

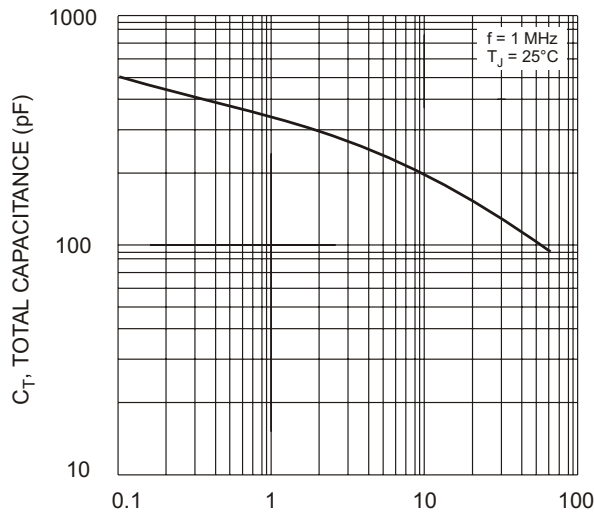

$V_R$ , REVERSE VOLTAGE (V)  
Fig. 5 Typical Capacitance

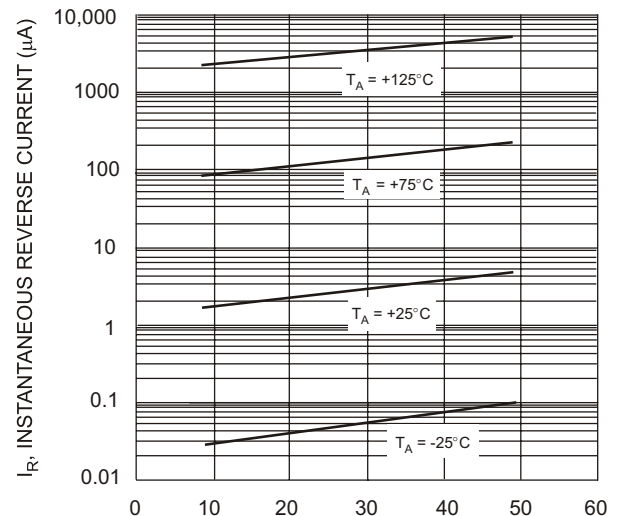


$V_R$ , INSTANTANEOUS REVERSE VOLTAGE (V)  
Fig. 6 Typical Reverse Characteristics, B320/A/B thru B340/A/B

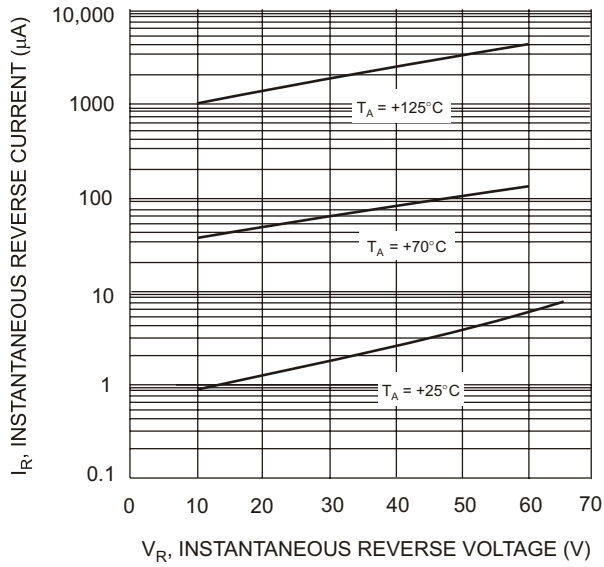

**Ordering Information** (Note 5 & 6)

Device*	Packaging	Shipping
B3XXA-13	SMA	5000/Tape & Reel
B3XXB-13	SMB	3000/Tape & Reel
B3XX-13	SMC	3000/Tape & Reel

- Notes: 5. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.  
 6. For Lead Free Finish/RoHS Compliant part number, please add "-F" suffix to the part number above. Example: B320A-13-F.  
 \* xx = Device type, e.g. B320A-13 (SMA package); B320B-13 (SMB package); B320-13 (SMC Package).



BXXX = Product type marking code, ex: B320 (SMC package)  
 BXXXX = Product type marking code, ex: B320A (SMA package)  
 D|| = Manufacturers' code marking  
 YWW = Date code marking  
 Y = Last digit of year ex: 2 for 2002  
 WW = Week code 01 to 52

Note: Device has a cathode band (as shown above) and may also have a cathode notch (as shown on Page 1).