



2W005G Thru 2W10G


2 AMP GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER

FEATURES


- Rating to 1000V PRV
- Surge overload rating to 60 Amperes peak
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- UL recognized: File #E106441
- UL recognized 94V-O plastic material

Mechanical Data

- Case: Molded plastic
- Weight: 0.05 ounce, 1.3 grams
- Mounting Position: Any

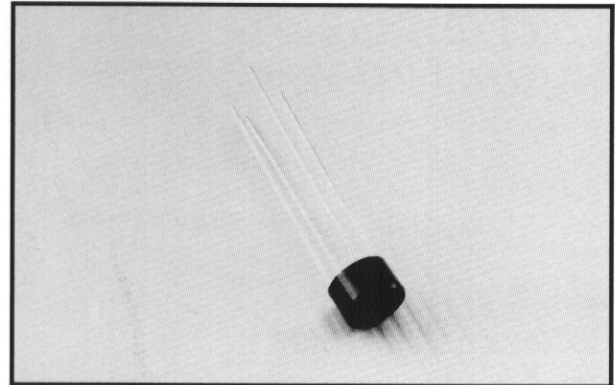

Outline Drawing

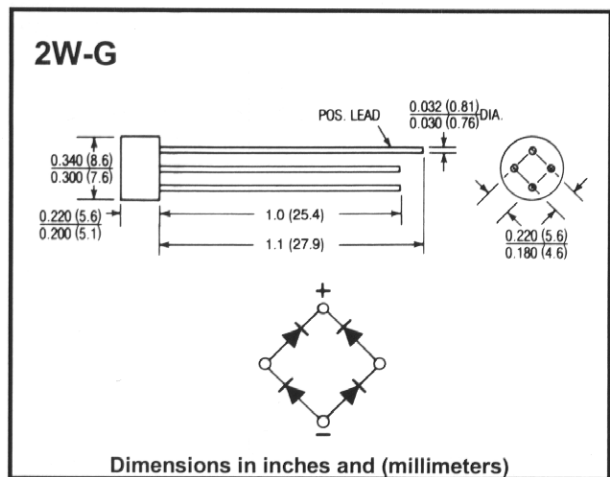

Maximum Ratings & Characteristics

- Ratings at 25° C ambient temperature unless otherwise specified
- Single phase, half wave, 60Hz, resistive or inductive load
- For capacitive load, derate current by 20%

		2W005G	2W01G	2W02G	2W04G	2W06G	2W08G	2W10G	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	60	100	200	400	600	800	1000	V
Maximum Average Forward Output Current @ $T_A = 25^\circ C$	$I_{(AV)}$	2.0							A
Peak Forward Surge Current 8.3 ms Single Half-Sine-Wave Superimposed On Rated Load	I_{FSM}	60							A
Maximum DC Forward Voltage Drop per Element At 1.0A DC	V_F	1.1							V
Maximum DC Reverse Current At Rated DC Blocking Voltage per Element @ $T_A = 125^\circ C$	I_R	5							μA
Typical Junction Capacitance Per Element *	C_J	16							pF
Typical Thermal Resistance **	$R_{(TH J-A)}$	40							$^\circ C/W$
Operating Temperature Range	T_J	-55 to +150							$^\circ C$
Storage Temperature Range	T_{STG}	-55 to +150							$^\circ C$

Notes: *Measured at 1.0MHZ and applied reverse voltage of 4.0V DC

** Thermal resistance junction to ambient at .375" (9.5mm) lead length, PC board mounted