

Technical Data  
Data Sheet 2878, Rev. -


**6TQ035/S/6TQ040/S/6TQ045/S**  
**SCHOTTKY RECTIFIER**

**Applications:**


- Switching power supply • Converters • Free-Wheeling diodes • Reverse battery protection

**Features:**


- 175°C T<sub>J</sub> operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

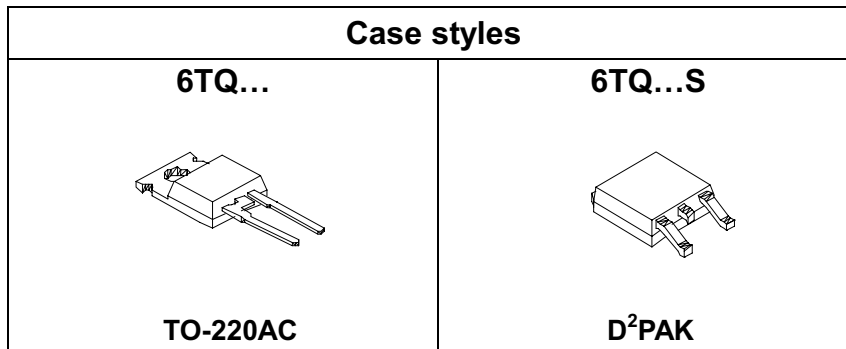

**Mechanical Dimensions: In Inches / mm**

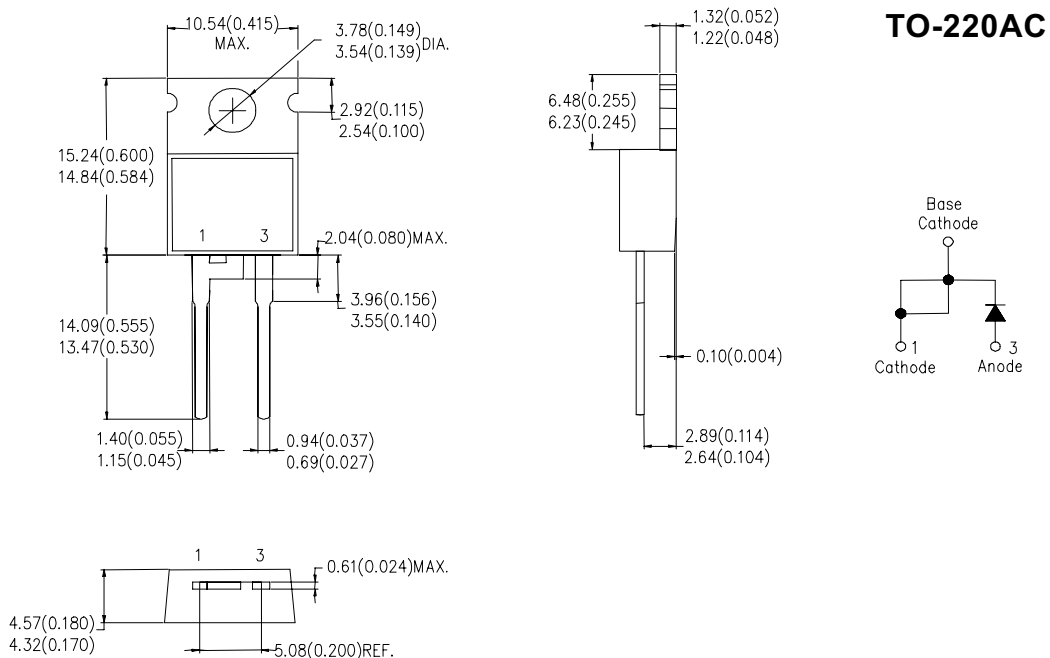

Data Sheet 2878, Rev. -

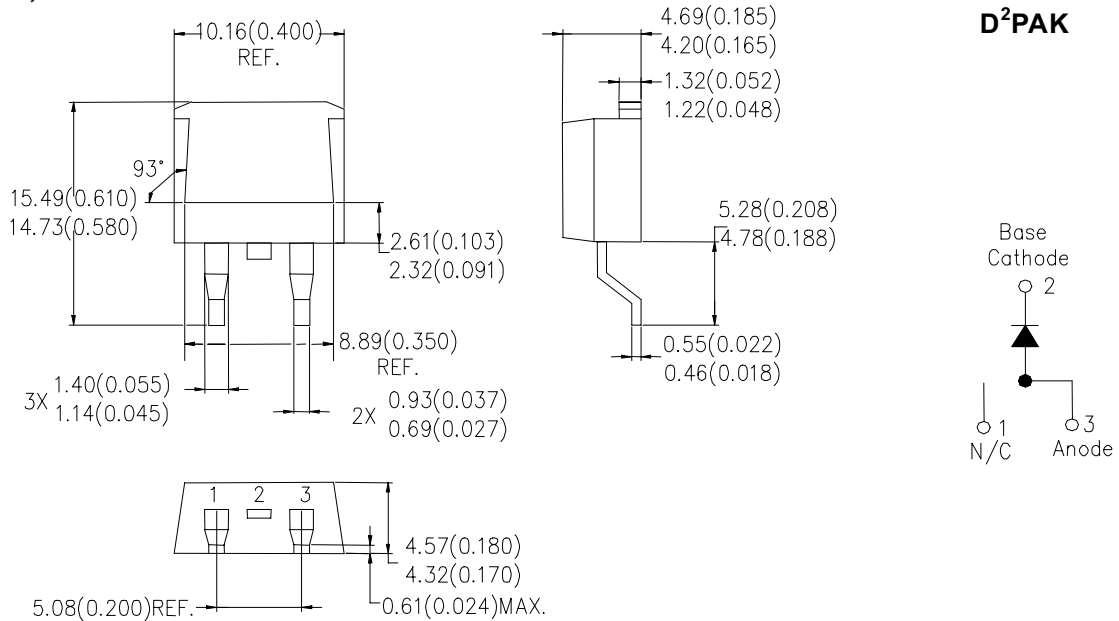

**Maximum Ratings:**

Characteristics	Symbol	Condition	Max.	Units
Peak Inverse Voltage	$V_{RWM}$	-	35(6TQ035) 40(6TQ040) 45(6TQ045)	V
Max. Average Forward Current	$I_{F(AV)}$	50% duty cycle @ $T_C = 164^\circ\text{C}$ , rectangular wave form	6	A
Max. Peak One Cycle Non-Repetitive Surge Current	$I_{FSM}$	8.3 ms, half Sine pulse	160	A
Non-Repetitive Avalanche Energy	$E_{AS}$	$T_J = 25^\circ\text{C}$ , $I_{AS} = 1.20\text{ A}$ , $L = 11.10\text{ mH}$	8	mJ
Repetitive Avalanche Current	$I_{AR}$	Current decaying linearly to zero in 1 $\mu\text{sec}$ Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical	1.2	A

**Electrical Characteristics:**

Characteristics	Symbol	Condition	Max.	Units
Max. Forward Voltage Drop *	$V_{F1}$	@ 6 A, Pulse, $T_J = 25^\circ\text{C}$ @12 A, Pulse, $T_J = 25^\circ\text{C}$	0.60 0.73	V
	$V_{F2}$	@ 6 A, Pulse, $T_J = 125^\circ\text{C}$ @12 A, Pulse, $T_J = 125^\circ\text{C}$	0.53 0.64	V
Max. Reverse Current *	$I_{R1}$	@ $V_R = \text{Rated } V_R$ , Pulse, $T_J = 25^\circ\text{C}$	0.8	mA
	$I_{R2}$	@ $V_R = \text{Rated } V_R$ , Pulse, $T_J = 125^\circ\text{C}$	7	mA
Max. Junction Capacitance	$C_T$	@ $V_R = 5\text{ V}$ , $T_C = 25^\circ\text{C}$ $f_{SIG} = 1\text{ MHz}$	400	pF
Typical Series Inductance	$L_S$	Measured lead to lead 5 mm from package body	8.0	nH
Max. Voltage Rate of Change (Rated $V_R$ )	dv/dt	-	10,000	V/ $\mu\text{s}$


\* Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

Data Sheet 2878, Rev. -


**Thermal-Mechanical Specifications:**

Characteristics	Symbol	Condition	Specification	Units
Max. Junction Temperature	$T_J$	-	-55 to +175	°C
Max. Storage Temperature	$T_{stg}$	-	-55 to +175	°C
Maximum Thermal Resistance Junction to Case	$R_{\theta JC}$	DC operation	2.2	°C/W
Typical Thermal Resistance, Case to Heat Sink	$R_{\theta CS}$	Mounting surface, smooth and greased	0.50	°C/W
Approximate Weight	wt	-	2	g
Mounting Torque	$T_M$	-	6 (min) 12 (max)	Kg-cm
Case Style	TO-220AC D <sup>2</sup> PAK (Suffix "s" for D <sup>2</sup> PAK; "MBRB xxxx" for D <sup>2</sup> PAK)			


**Typical Forward Characteristics**

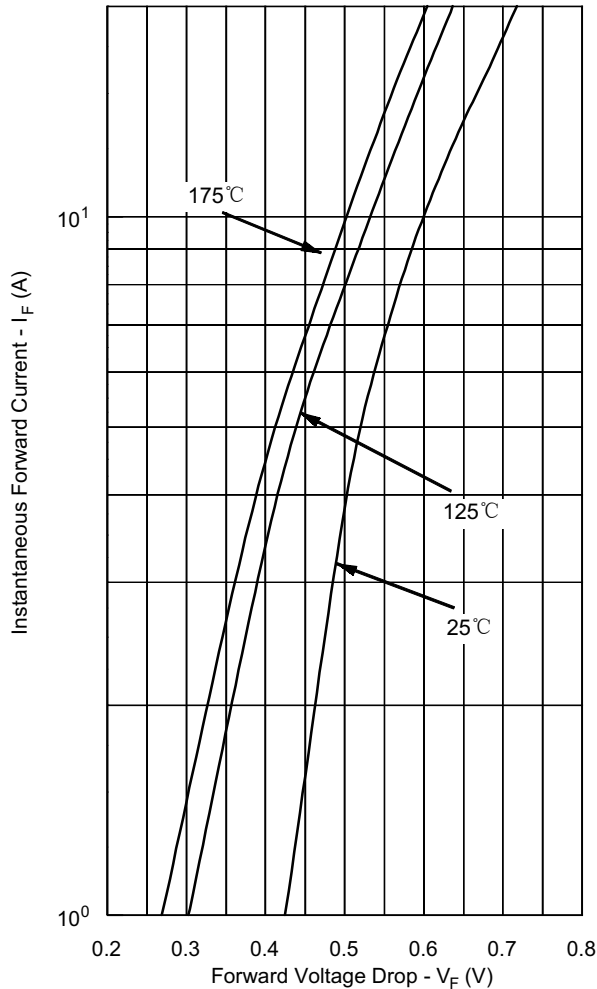

**Typical Reverse Characteristics**

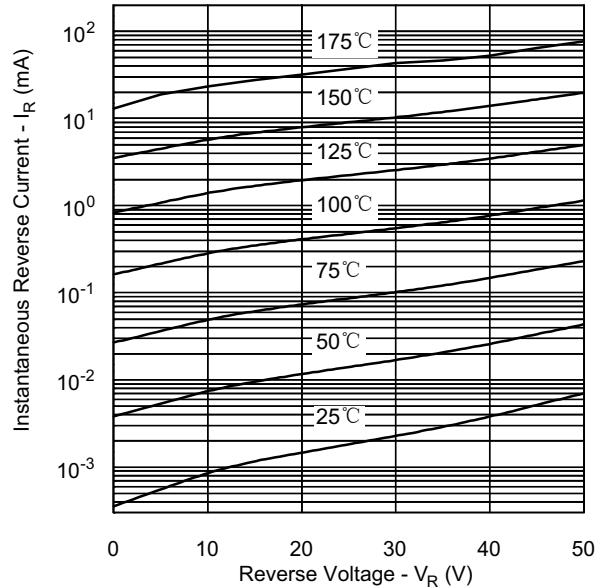

**Typical Junction Capacitance**

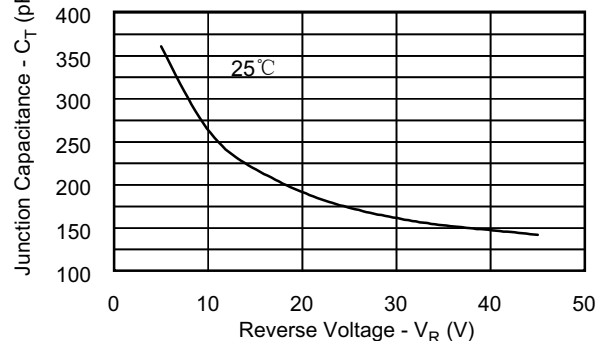

**TECHNICAL DATA**

**DISCLAIMER:**

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.