



P-Channel 1.8-V (G-S) MOSFET

TrenchFET[®]
Power MOSFETs
1.8-V Rated

PRODUCT SUMMARY		
V_{DS} (V)	$r_{DS(on)}$ (Ω)	I_D (A)
-8	0.280 @ $V_{GS} = -4.5$ V	-0.92
	0.380 @ $V_{GS} = -2.5$ V	-0.79
	0.530 @ $V_{GS} = -1.8$ V	-0.67



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)				
Parameter	Symbol	5 secs	Steady State	Unit
Drain-Source Voltage	V_{DS}	-8		V
Gate-Source Voltage	V_{GS}	± 8		
Continuous Drain Current ($T_J = 150^\circ\text{C}$) ^a	$T_A = 25^\circ\text{C}$	-0.92	-0.86	A
	$T_A = 70^\circ\text{C}$	-0.74	-0.69	
Pulsed Drain Current	I_{DM}	-3		
Continuous Diode Current (Diode Conduction) ^a	I_S	-0.28	-0.24	
Maximum Power Dissipation ^a	$T_A = 25^\circ\text{C}$	0.34	0.29	W
	$T_A = 70^\circ\text{C}$	0.22	0.19	
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 to 150		$^\circ\text{C}$

THERMAL RESISTANCE RATINGS				
Parameter	Symbol	Typical	Maximum	Unit
Maximum Junction-to-Ambient ^a	$t \leq 5$ sec	315	375	$^\circ\text{C/W}$
	Steady State	360	430	
Maximum Junction-to-Foot (Drain)	Steady State	285	340	



Notes
a. Surface Mounted on 1" x 1" FR4 Board.

SPECIFICATIONS (T_J = 25 °C UNLESS OTHERWISE NOTED)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250 μA	-0.45			V
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±8 V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -6.4 V, V _{GS} = 0 V			-1	μA
		V _{DS} = -6.4 V, V _{GS} = 0 V, T _J = 70 °C			-5	
On-State Drain Current ^a	I _{D(on)}	V _{DS} = -5 V, V _{GS} = -4.5 V	-3			A
Drain-Source On-State Resistance ^a	r _{DS(on)}	V _{GS} = -4.5 V, I _D = -1 A		0.230	0.280	Ω
		V _{GS} = -2.5 V, I _D = -0.5 A		0.315	0.380	
		V _{GS} = -1.8 V, I _D = -0.3 A		0.440	0.530	
Forward Transconductance ^a	g _{fs}	V _{DS} = -5 V, I _D = -1 A		3.5		S
Diode Forward Voltage ^a	V _{SD}	I _S = -0.3 A, V _{GS} = 0 V			-1.2	V
Dynamic^b						
Total Gate Charge	Q _g	V _{DS} = -4 V, V _{GS} = -4.5 V, I _D = -1 A		2.6	4	nC
Gate-Source Charge	Q _{gs}			0.6		
Gate-Drain Charge	Q _{gd}			0.5		
Turn-On Delay Time	t _{d(on)}	V _{DD} = -4 V, R _L = 4 Ω I _D ≅ -1 A, V _{GEN} = -4.5 V, R _G = 6 Ω		8	15	ns
Rise Time	t _r			55	80	
Turn-Off Delay Time	t _{d(off)}			17	25	
Fall Time	t _f			12	20	
Source-Drain Reverse Recovery Time	t _{rr}	I _F = -1 A, di/dt = 100 A/μs		27	45	

Notes


- a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
b. Guaranteed by design, not subject to production testing.

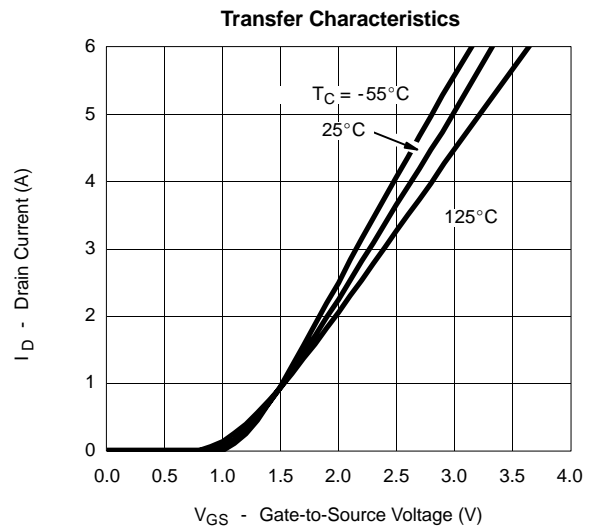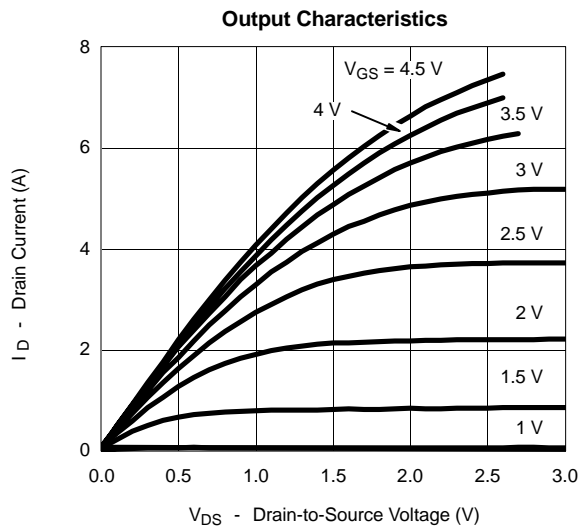TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)




TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)


On-Resistance vs. Drain Current

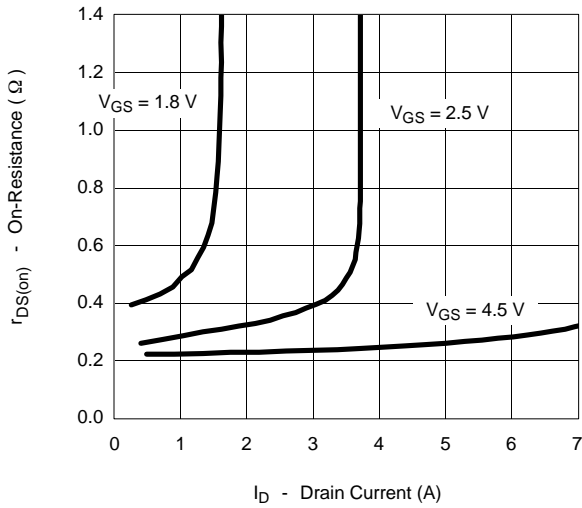


Capacitance

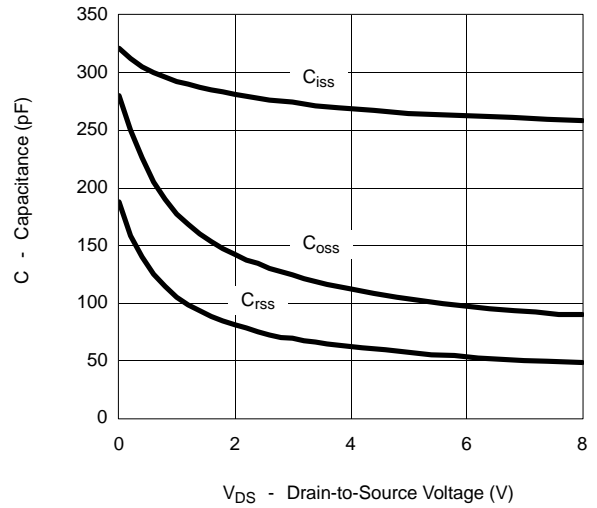


Gate Charge

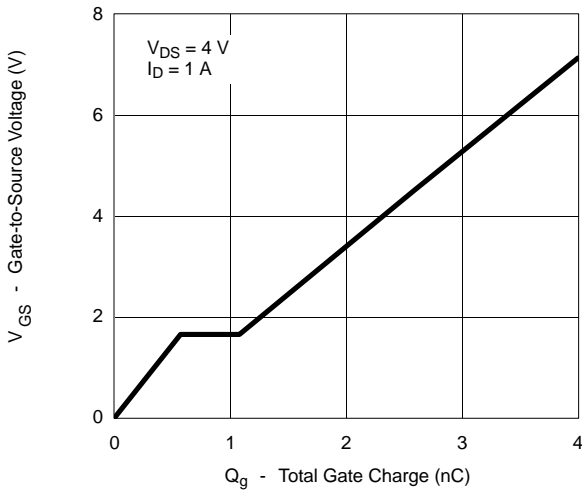


On-Resistance vs. Junction Temperature

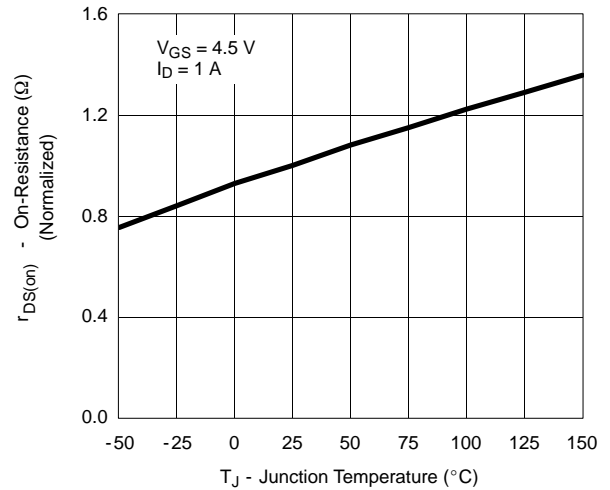

Source-Drain Diode Forward Voltage

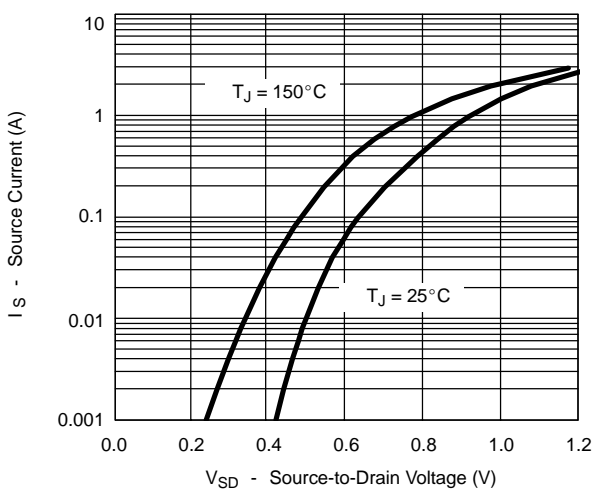

On-Resistance vs. Gate-to-Source Voltage

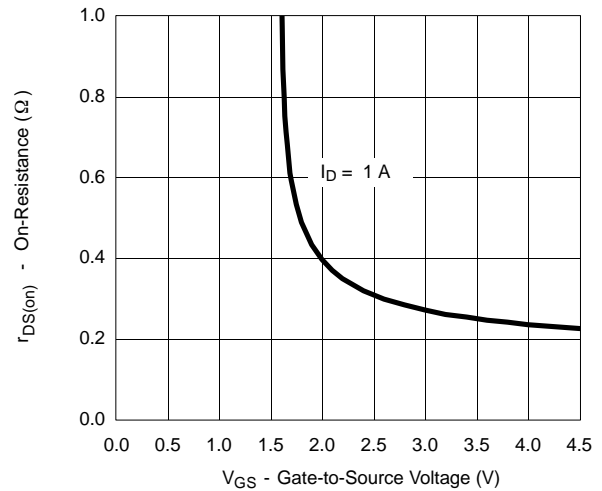



TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

