



No. of Contacts	DIMENSIONS	
	A	B
2	2.00	4.00
3	4.00	6.00
4	6.00	8.00
5	8.00	10.00
6	10.00	12.00
7	12.00	14.00
8	14.00	16.00
9	16.00	18.00
10	18.00	20.00
11	20.00	22.00
12	22.00	24.00
13	24.00	26.00
14	26.00	28.00
15	28.00	30.00
16	30.00	32.00
17	32.00	34.00
18	34.00	36.00
19	36.00	38.00
20	38.00	40.00
21	40.00	42.00
22	42.00	44.00
23	44.00	46.00
24	46.00	48.00
25	48.00	50.00
26	50.00	52.00
27	52.00	54.00
28	54.00	56.00
29	56.00	58.00
30	58.00	60.00
31	60.00	62.00
32	62.00	64.00
33	64.00	66.00
34	66.00	68.00
35	68.00	70.00
36	70.00	72.00
37	72.00	74.00
38	74.00	76.00
39	76.00	78.00
40	78.00	80.00

SPECIFICATIONS

- Current Rating: 1 Amp
- Insulator Resistance: 5000 Mega Ohms min.
- Dielectric Withstanding: AC 500 V
- Operating Temperature: -40 Degrees C. - +105 Degrees C.
- Contact Material: Brass
- Insulator Material: PBT, UL 94V-0
- Contact Finish: Overall Gold or Selective Plating Gold/Tin

Standard Part is:
PBT
Overall Gold Flash plating

Contact Sullins Electronics
for additional plating options
available.

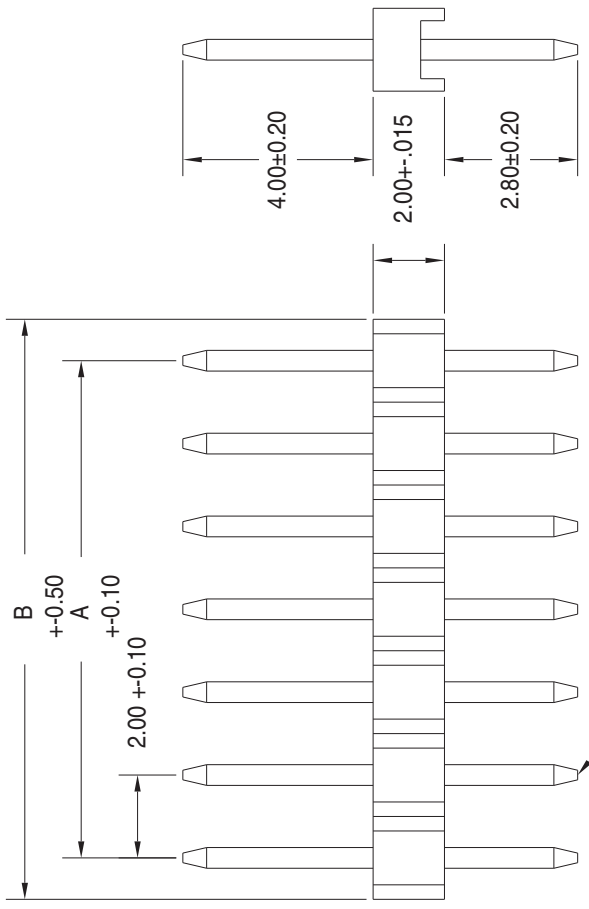

0.50X0.50 ± 0.05 To complete the part number, replace "xx" with number of contacts. The 3rd letter in the part number designates plating. Insert:
 P = Gold flash all over
 Z = 10u" selective Gold / Tin on Tail
 W = Selective Gold Flash / Tin on tail
 X = A30u" selective gold / Tin on tail

Added information notes

SULLINS 801 E. MISSION RD. SAN MARCOS, CA 92069		11-27-02		A		GENERAL TOLERANCE		SCALE 6:1		DRAWN		DATE		DWG. NO. T0016		TITLE		REV. A	
XX. +	.XXX. +	X. +	0.20	.XXX. +	MM	CHECK	DATE	PARTS NO. PR_Nxx1PAEN		DATE		DATE		DATE		DATE		SHEET	
.X +	0.10	X.β +	A4	APPROVE															
.XX +	0.05	.Xβ +																	