



MOTOROLA

OCTAL BUS TRANSCEIVER WITH 3-STATE OUTPUTS (INVERTING AND NONINVERTING)


The MC74F620 is an octal bus transceiver featuring inverting 3-state bus-compatible outputs in both send and receive directions. The B_N outputs are capable of sinking 64 mA and sourcing up to 15 mA, providing very good capacitive drive characteristics. The MC74F623 is a non-inverting version of the MC74F620. These octal bus transceivers are designed for asynchronous two-way communication between data busses. The control function implementation allows for maximum flexibility in timing. These devices allow data transmission from the A bus to the B bus or from B bus to A bus, depending upon the logic levels at the Enable inputs (\overline{OEBA} and \overline{OEAB}). The Enable inputs can be used to disable the device so that the busses are effectively isolated. The dual-enable configuration gives the MC74F620 and MC74F623 the capability to store data by the simultaneous enabling of \overline{OEBA} and \overline{OEAB} . Each output reinforces its input in this transceiver configuration. Thus, when both control inputs are enabled and all other data sources to the two sets of the bus lines are at high impedance, both sets of bus lines (16 in all) will remain at their last states.

- 4
- High Impedance NPN base inputs for reduced loading (70 μ A in High and Low states)
 - Ideal for Applications which Require High Output drive and minimal bus loading
 - Octal Bidirectional Bus Interface
 - 3-State Buffer Outputs Sink 64 mA and Source 15 mA
 - F620 Inverting
 - F623 Noninverting
 - ESD Protection > 4000 Volts

**MC74F620
MC74F623**

**OCTAL BUS TRANSCEIVER
WITH 3-STATE OUTPUTS
(INVERTING AND NONINVERTING)**



FAST™ SCHOTTKY TTL

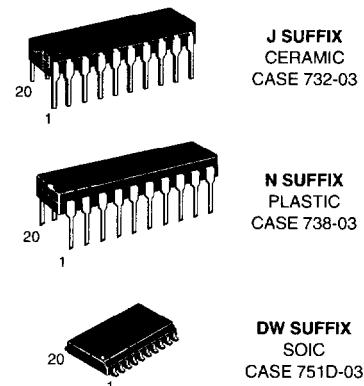

ORDERING INFORMATION


MC74FXXXJ Ceramic
MC74FXXXN Plastic
MC74FXXXDW SOIC

PIN ASSIGNMENTS

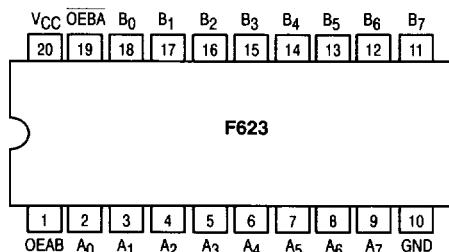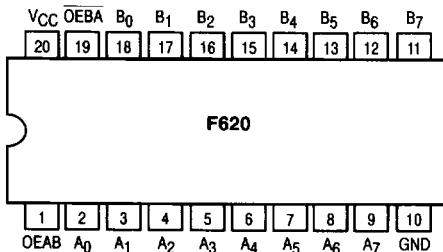

MC74F620 • MC74F623

LOGIC SYMBOLS

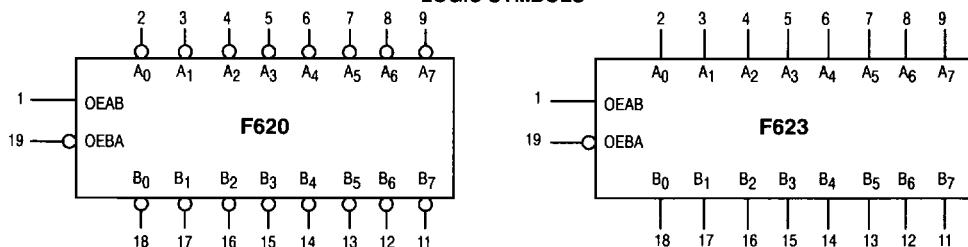

FUNCTION TABLE

| Inputs | | Operating Modes | |
|--------|------|-------------------------------------|------------------------------------|
| OEBA | OEAB | F620 | F623 |
| L | L | ̄B data to A bus | B data to A bus |
| H | H | ̄A data to B bus | A data to B bus |
| H | L | Z | Z |
| L | H | ̄B data to A bus A data to B bus | B data to A bus A data to B bus |

H = HIGH voltage level; L = LOW voltage level; X = Don't care; Z = High impedance "off" state

GUARANTEED OPERATING RANGES

| Symbol | Parameter | Limits | | | Unit | |
|-----------------|-------------------------------------|------------------------|-----|-----|------|----|
| | | Min | Typ | Max | | |
| V _{CC} | DC Supply Voltage | 74 | 4.5 | 5.0 | 5.5 | V |
| T _A | Operating Ambient Temperature Range | 74 | 0 | 25 | 70 | °C |
| I _{OH} | Output Current — High | A _n Outputs | 74 | — | -3.0 | mA |
| I _{OH} | Output Current — High | B _n Outputs | 74 | — | -15 | mA |
| I _{OL} | Output Current — Low | A _n Outputs | 74 | — | 24 | mA |
| I _{OL} | Output Current — Low | B _n Outputs | 74 | — | 64 | mA |

MC74F620 • MC74F623

DC CHARACTERISTICS OVER OPERATING TEMPERATURE RANGE (unless otherwise specified)



| Symbol | Parameter | Limits | | | Unit | Test Conditions (Note 1) | |
|------------------------------------|--|--------------------------------|------------------|------|------|---|--|
| | | Min | Typ | Max | | | |
| V _{IH} | Input HIGH Voltage | 2.0 | — | — | V | Guaranteed as a HIGH Signal | |
| V _{IL} | Input LOW Voltage | — | — | 0.8 | V | Guaranteed as a LOW Signal | |
| V _{IK} | Input Clamp Diode Voltage | — | — | -1.2 | V | V _{CC} = MIN, I _{IN} = -18 mA | |
| V _{OH} | Output HIGH Voltage | A _n | 74 | 2.4 | 3.3 | — | V I _{OH} = -3.0 mA V _{CC} = 4.5 V |
| | | | 74 | 2.7 | 3.3 | — | V I _{OH} = -3.0 mA V _{CC} = 4.75 V |
| | | B _n | 74 | 2.4 | 3.4 | — | V I _{OH} = -3.0 mA V _{CC} = 4.5 V |
| | | | 74 | 2.7 | 3.4 | — | V I _{OH} = -3.0 mA V _{CC} = 4.75 V |
| | | | 74 | 2.0 | — | — | V I _{OH} = -15.0 mA V _{CC} = 4.5 V |
| V _{OL} | Output LOW Voltage | A _n | 74 | — | 0.35 | 0.50 | V I _{OL} = 24 mA V _{CC} = MIN |
| V _{OL} | Output LOW Voltage | B _n | 74 | — | — | 0.55 | V I _{OL} = 64 mA V _{CC} = MIN |
| I _{OZH} + I _{IH} | Output Off Current HIGH | | | — | — | 70 | μA V _{CC} = MAX V _{OUT} = 2.7 V |
| I _{OZL} + I _{IL} | Output Off Current LOW | | | — | — | -70 | μA V _{CC} = MAX V _{OUT} = 0.5 V |
| I _{IH} | Input HIGH Current | OEBA, OEAB | | — | — | 20 | μA V _{CC} = MAX, V _{IN} = 2.7 V |
| | | OEBA, OEAB | | — | — | 100 | μA V _{CC} = 0 V, V _{IN} = 7.0 V |
| | | Others | | — | — | 1.0 | mA V _{CC} = MAX, V _{IN} = 5.5 V |
| I _{IL} | Input LOW Current | | Non I/O Pins | — | — | -20 | μA V _{CC} = MAX, V _{IN} = 0.5 V |
| I _{OS} | Output Short Circuit Current (Note 2) | A ₀ -A ₇ | | -60 | — | -150 | mA V _{CC} = MAX, V _{OUT} = GND |
| | | B ₀ -B ₇ | | -100 | — | -225 | |
| I _{CC} | Power Supply Current | F620 | I _{CCH} | — | — | 92 | V _{out} = HIGH V _{out} = LOW V _{out} = HIGH Z |
| | | | I _{CCL} | — | — | 110 | |
| | | | I _{CCZ} | — | — | 92 | |
| I _{CC} | Power Supply Current | F623 | — | — | 120 | mA | V _{CC} = MAX |

NOTES:

1. For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable device type.
2. Not more than one output should be shorted at a time, nor for more than 1 second.

MC74F620 • MC74F623

LOGIC DIAGRAMS

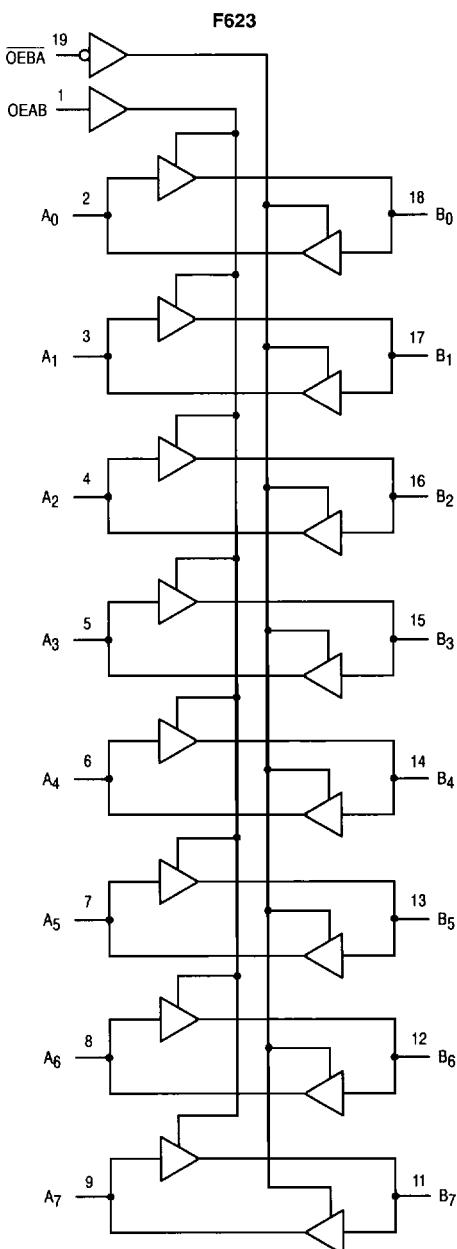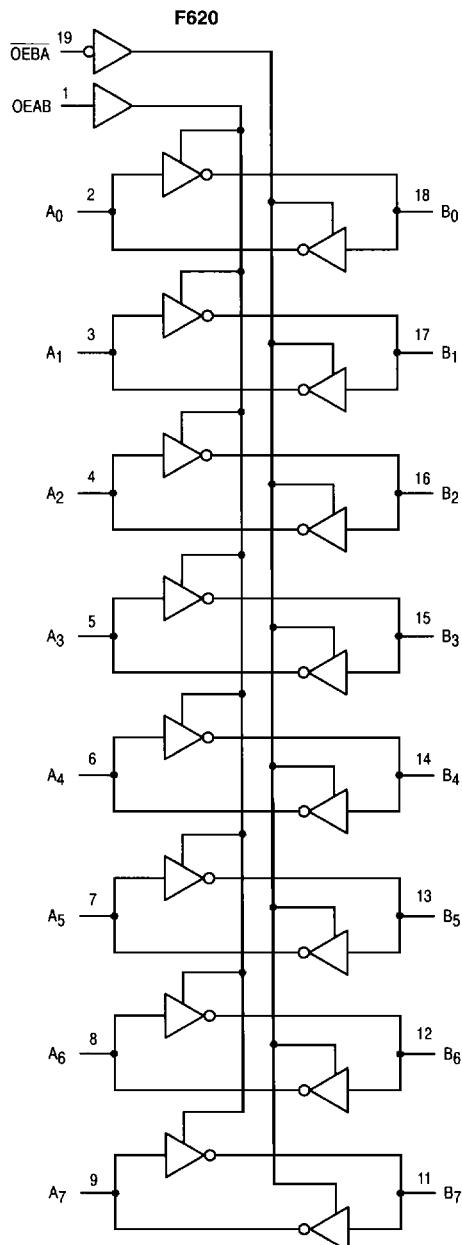

4

MC74F620 • MC74F623

AC ELECTRICAL CHARACTERISTICS For F620

| Symbol | Parameter | 74F | | | 74F | | | Unit | |
|-----------|---|---|--------|--------------|--|--------|--------------|------|--|
| | | $T_A = +25^\circ C$ $V_{CC} = +5.0 V$ $C_L = 50 pF$ | | | $T_A = 0^\circ C \text{ to } +70^\circ C$ $V_{CC} = +5.0 V \pm 10\%$ $C_L = 50 pF$ | | | | |
| | | Min | Typ | Max | Min | Typ | Max | | |
| t_{PLH} | Propagation Delay A_n to B_n and B_n to A_n | 2.5 1.0 | — — | 6.5 4.5 | 2.0 1.0 | — — | 7.5 5.0 | ns | |
| t_{PZH} | Output Enable Time to High or Low level, \overline{OEBA} to A_n | 3.0 4.0 | — — | 10.5 10.5 | 2.5 3.5 | — — | 11.5 11.5 | ns | |
| t_{PHZ} | Output Disable Time to High or Low level, \overline{OEBA} to A_n | 2.5 1.5 | — — | 7.5 7.0 | 2.0 1.0 | — — | 8.0 7.5 | ns | |
| t_{PZH} | Output Enable Time to High or Low level, $OEAB$ to B_n | 3.5 4.5 | — — | 10.5 10.0 | 3.5 4.0 | — — | 11.5 11.0 | ns | |
| t_{PHZ} | Output Disable Time to High or Low level, $OEAB$ to B_n | 3.0 3.0 | — — | 9.5 9.5 | 2.5 1.5 | — — | 10.5 10.5 | ns | |

AC ELECTRICAL CHARACTERISTICS For F623

| Symbol | Parameter | 74F | | | 74F | | | Unit | |
|-----------|---|---|--------|-------------|--|--------|--------------|------|--|
| | | $T_A = +25^\circ C$ $V_{CC} = +5.0 V$ $C_L = 50 pF$ | | | $T_A = 0^\circ C \text{ to } +70^\circ C$ $V_{CC} = +5.0 V \pm 10\%$ $C_L = 50 pF$ | | | | |
| | | Min | Typ | Max | Min | Typ | Max | | |
| t_{PLH} | Propagation Delay A_n to B_n | 2.0 3.0 | — — | 5.5 7.0 | 2.0 2.5 | — — | 6.5 7.5 | ns | |
| t_{PLH} | Propagation Delay B_n to A_n | 2.0 3.0 | — — | 6.0 7.0 | 2.0 2.5 | — — | 6.5 7.5 | ns | |
| t_{PZH} | Output Enable Time to High or Low level, \overline{OEBA} to A_n | 3.5 5.0 | — — | 10.5 9.5 | 3.5 5.0 | — — | 12.0 10.0 | ns | |
| t_{PHZ} | Output Disable Time to High or Low level, \overline{OEBA} to A_n | 1.5 1.5 | — — | 6.5 6.5 | 1.5 1.5 | — — | 7.5 7.0 | ns | |
| t_{PZH} | Output Enable Time to High or Low level, $OEAB$ to B_n | 3.5 4.5 | — — | 10.0 9.0 | 3.5 4.5 | — — | 11.5 9.5 | ns | |
| t_{PHZ} | Output Disable Time to High or Low level, $OEAB$ to B_n | 3.0 4.0 | — — | 8.5 9.0 | 3.0 2.0 | — — | 10.0 10.0 | ns | |