


**SSF-LXH4RA5XX SERIES P.C. LED RE-LAMPABLE INDICATOR**

LUMEX PART NBR	EMITTED COLOR		OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS TYP (mCD) @	LED SERIES USED		
	RED	GREEN					PEAK(nm)	mA
SSF-LXH4RASID	RED		635	10-25	2.1	14	20	SSL-LX5093XX
SSF-LXH4RASRD	RED		660	10-25	1.7	70	20	SSL-LX5093XX
SSF-LXH4RASGD	GREEN		565	10-25	2.1	14	20	SSL-LX5093XX
SSF-LXH4RASD	YELLOW		585	10-25	2.1	14	20	SSL-LX5093XX
<b>BI-COLOR OPTION</b>								
SSF-LXH4RASGHW	RED/GREEN		695/565	10-25	2.1	6/6	20	SSL-LX5093HGW
<b>LOW CURRENT OPTIONS</b>								
SSF-LXH4RASLID	RED		635	1-5	1.8	1.4	2	SSL-LX5093LXX
SSF-LXH4RASLGD	GREEN		565	1-5	1.8	1.4	2	SSL-LX5093LXX
SSF-LXH4RASLYD	YELLOW		585	1-5	1.8	1.4	2	SSL-LX5093LXX
<b>BLINKING OPTIONS</b>								
SSF-LXH4RASBID	RED		635	10-20	3-15V	8	9V	SSL-LX5093LXX

See pages 8 - 14 for Max. operating limits and operating curves

**DIMENSIONS (mm) ±.2mm**

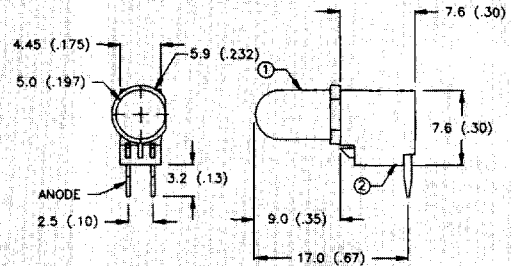


**SSF-LXH100MXX SERIES P.C. LED MATING SINGLE HOLDER**

LUMEX PART NBR	EMITTED COLOR		OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS TYP (mCD) @	LED SERIES USED		
	RED	GREEN					PEAK(nm)	mA
SSF-LXH100MID	RED		635	10-25	2.1	9	20	SSL-LX509F3XX
SSF-LXH100MSRD	RED		660	10-25	1.7	40	20	SSL-LX509F3XX
SSF-LXH100MGD	GREEN		565	10-25	2.1	9	20	SSL-LX509F3XX
SSF-LXH100MYD	YELLOW		585	10-25	2.1	9	20	SSL-LX509F3XX
<b>BI-COLOR OPTION</b>								
SSF-LXH100MHGW	RED/GREEN		695/565	10-25	2.1	6/6	20	SSL-LX407F3HGW
<b>LOW CURRENT OPTIONS</b>								
SSF-LXH100MLID	RED		635	1-5	1.8	1.2	2	SSL-LX509F3XX
SSF-LXH100MLGD	GREEN		565	1-5	1.8	1.2	2	SSL-LX509F3XX
SSF-LXH100LYD	YELLOW		585	1-5	1.8	1.2	2	SSL-LX509F3XX

See pages 8-14 for Max. operating limits and operating curves

**DIMENSIONS (mm) ±.2mm**

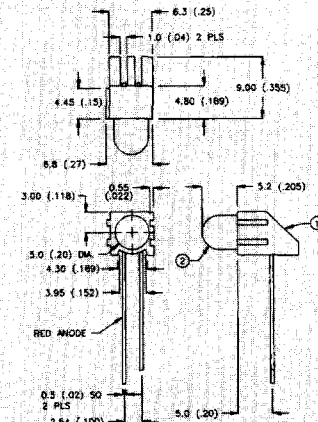

**SSF-LXH101MXX SERIES P.C. MOUNT LED FLAT BACK HOLDER**

LUMEX PART NBR	EMITTED COLOR		OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS TYP (MRD) @	LED SERIES USED		
	RED	GREEN					PEAK(nm)	mA
SSF-LXH101ID	RED		635	10-25	2.1	8	20	SSL-LX507F3XX
SSF-LXH101SRD	RED		660	10-25	1.7	40	20	SSL-LX507F3XX
SSF-LXH101GD	GREEN		565	10-25	2.1	8	20	SSL-LX507F3XX
SSF-LXH101YD	YELLOW		585	10-25	2.1	8	20	SSL-LX507F3XX
<b>BI-COLOR OPTION</b>								
SSF-LXH101HGW	RED GREEN		695/565	10-25	2.1	6/6	20	SSL-LX507F3HGW
<b>LOW CURRENT OPTIONS</b>								
SSF-LXH101LID	RED		635	1-5	1.8	1.2	2	SSL-LX507F3LXX
SSF-LXH101LGD	GREEN		565	1-5	1.8	1.2	2	SSL-LX507F3LXX
SSF-LXH101LYD	YELLOW		585	1-5	1.8	1.2	2	SSL-LX507F3LXX

See pages 8-14 for Max. operating limits and operating curves

**DIMENSIONS (mm) ±.2mm**

