

NUMBER OF CONTACT	A±0.2	B+0.1/-0.3
4	2	4.6
6	4	6.6
8	6	8.6
10	8	10.6
12	10	12.6
14	12	14.6
16	14	16.6
18	16	18.6
20	18	20.6
22	20	22.6
24	22	24.6
26	24	26.6
28	26	28.6
30	28	30.6
32	30	32.6
34	32	34.6
36	34	36.6
38	36	38.6
40	38	40.6
42	40	42.6
44	42	44.6
46	44	46.6
48	46	48.6
50	48	50.6


NOTES.

1. PLATING

CONTACT ZONE: GOLD 0.38 μm

SOLDERING ZONE: TIN/LEAD 1 μm

2. "n" SHOWS NUMBER OF CONTACT

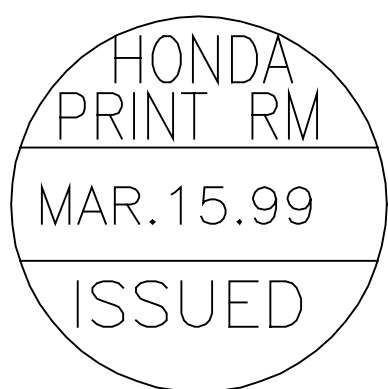

△3										
△2				2	CONTACT	PHOSPHOR BRONZE	n	NOTE.1		
△1				1	INSULATOR	PBT	1		UL94V-0 BLACK	
LTR.	DATE	BY	REV.	DESCRIPT	NO.	PART NAME	MATERIAL	QTY	FINISH	NOTE
DATE MAR.15.99		SCALE 2 / 1		UNIT mm(INCH)	3RD . A . P		HONDA TSUSHIN KOGYO., LTD.			
DR	DE	CHK	CHK	APP	NAME		FEMALE CONNECTOR			
					PART NO.		LPC-(n)FDG4			