

**AMP Mini-Tandem Spring Housings, Double-Row**

**.100 [2.54] Centerline**

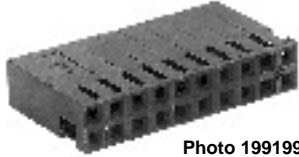




Photo 199199

**Material**—Black glass-filled polyester, 94V-0 rated\*

**Technical Documents** (page 294):

**Product Specification** 108-25031

**Application Specification** 114-25021

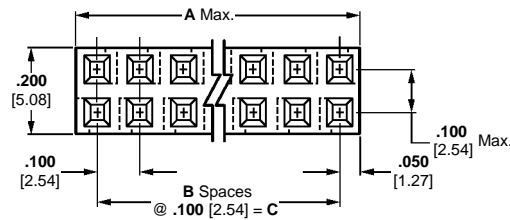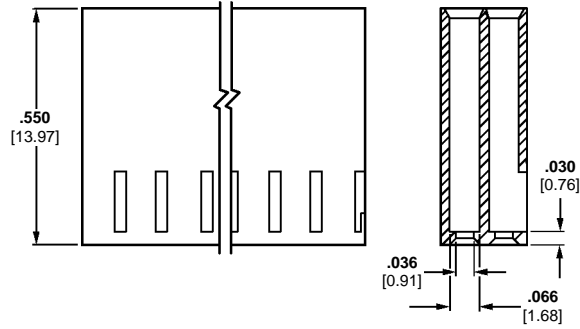

Minimum mating post length is .140 [3.55].

**Material**—Natural color nylon, 94V-2 rated



**Keying Plug**  
Part No. 531226-1  
(Plugs directly into housing)

No. of Pos.	Dimensions			Housing Part No.
	A	B	C	
4	.200 [5.08]	1	.100 [2.54]	530902-5
6	.300 [7.62]	2	.200 [5.08]	530902-1
8	.400 [10.16]	3	.300 [7.62]	530902-6
10	.500 [12.70]	4	.400 [10.16]	530902-2
12	.600 [15.24]	5	.500 [12.70]	2-530902-0
16	.800 [20.32]	7	.700 [17.78]	3-530902-0
20	1.000 [25.40]	9	.900 [22.86]	530902-8

**Note:** AMP Mini-Tandem Spring contacts for use in these housings are shown on page 288.

\*Consult Tyco Electronics for specific UL recognition.