


**SN74ALS874B, SN74ALS876A, SN74AS874, SN74AS876**  
**SN54ALS874B, SN54AS874**  
**DUAL 4-BIT D-TYPE EDGE-TRIGGERED FLIP-FLOPS**

D2681, APRIL 1982 - REVISED MAY 1986

- 3-State Buffer-Type Outputs Drive Bus-Lines Directly
- Bus-Structured Pinout
- Choice of True or Inverting Logic  
 'ALS874B, 'AS874 True Outputs  
 'ALS876A, 'AS876 Inverting Outputs
- Asynchronous Clear
- Package Options Include Plastic "Small Outline" Packages, Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs
- Dependable Texas Instruments Quality and Reliability

SN54ALS874B, SN54AS874 ... JT PACKAGE  
 SN74ALS874B, SN74AS874 ... DW OR NT PACKAGE

(TOP VIEW)



**description**


These dual four-bit registers feature three-state outputs designed specifically for bus driving. This makes these devices particularly suitable for implementing buffer registers, I/O ports, bidirectional bus drivers, and working registers.

The edge-triggered flip-flops enter data on the low-to-high transition of the clock. The 'ALS874B and 'AS874 have CLR inputs and noninverting Q outputs; the 'ALS876A and 'AS876 have PRE inputs and inverting Q outputs. In each case, taking this input low causes the four Q or Q outputs to go low independently of the clock.

The SN54ALS' and SN54AS' devices are characterized for operation over the full military temperature range of -55°C to 125°C. The SN74ALS' and SN74AS' devices are characterized for operation from 0°C to 70°C.


SN54ALS874B, SN54AS874 ... FK PACKAGE

(TOP VIEW)



SN74ALS876A, SN74AS876 ... DW OR NT PACKAGE

(TOP VIEW)



PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



Copyright © 1982, Texas Instruments Incorporated

**SN74ALS874B, SN74ALS876A, SN74AS874, SN74AS876**  
**SN54ALS874B, SN54AS874**  
**DUAL 4-BIT D-TYPE EDGE-TRIGGERED FLIP-FLOPS**

FUNCTION TABLES



'ALS874B, 'AS874 (EACH FLIP-FLOP)

INPUTS				OUTPUT
$\overline{OC}$	CLR	CLK	D	Q
L	L	X	X	L
L	H	↑	H	H
L	H	↑	L	L
L	H	L	X	$Q_0$
H	X	X	X	Z

'ALS876A, 'AS876 (EACH FLIP-FLOP)

INPUTS				OUTPUT
$\overline{OC}$	PRE	CLK	D	$\overline{Q}$
L	L	X	X	L
L	H	↑	H	L
L	H	↑	L	H
L	H	L	X	$\overline{Q}_0$
H	X	X	X	Z


logic symbols†

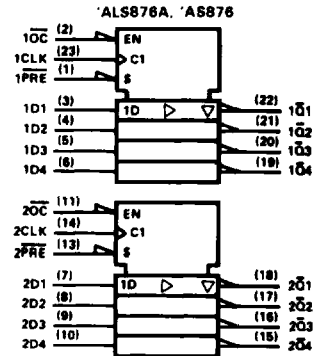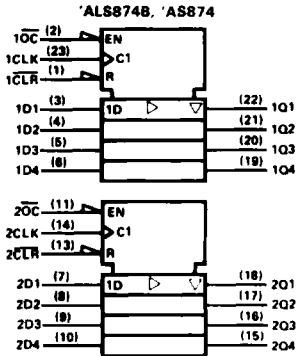


†These symbols are in accordance with ANSI/IEEE Std 91 1984 and IEC Publication 617.12.

logic diagrams (positive logic)

'ALS874B, 'AS874 (EACH QUAD FLIP-FLOP)

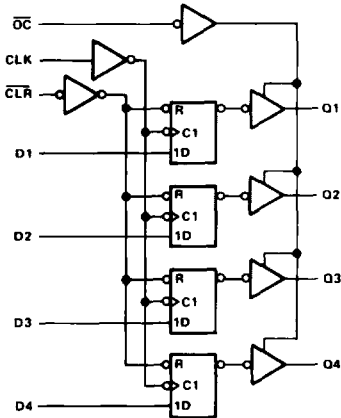

'ALS876A, 'AS876 (EACH QUAD FLIP-FLOP)

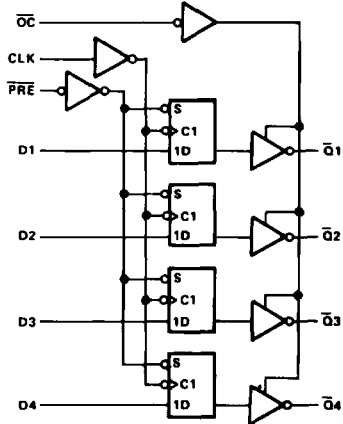

Pin numbers shown are for DW, JT, and NT packages.

**SN74ALS874B, SN74ALS876A**  
**SN54ALS874B**  
**DUAL 4-BIT D-TYPE EDGE-TRIGGERED FLIP-FLOPS**

**absolute maximum ratings over operating free-air temperature range (unless otherwise noted)**

Supply voltage, $V_{CC}$ .....	7 V
Input voltage .....	7 V
Voltage applied to a disabled 3-state output .....	5.5 V
Operating free-air temperature range: SN54ALS874B .....	-55°C to 125°C
SN74ALS874B, SN74ALS876A .....	0°C to 70°C
Storage temperature range .....	-65°C to 150°C

**recommended operating conditions**

		SN54ALS874B			SN74ALS874B SN74ALS876A			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
$V_{CC}$	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
$V_{IH}$	High-level input voltage	2			2			V
$V_{IL}$	Low-level input voltage			0.7			0.8	V
$I_{OH}$	High-level output current			-1			-2.6	mA
$I_{OL}$	Low-level output current			12			24	mA
$f_{clock}$	Clock frequency	0		25	0		30	MHz
$t_w$	Pulse duration	PRE or CLR low		10		10		ns
		CLK high		20		16.5		
		CLK low		20		16.5		
$t_{su}$	Setup time before CLK <sup>1</sup>	Data		15		15		ns
		PRE or CLR inactive		10		10		
				4		0		
$t_h$	Hold time, data after CLK <sup>1</sup>			4		0		ns
$T_A$	Operating free-air temperature	-55		125	0		70	°C

**electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)**

PARAMETER	TEST CONDITIONS	SN54ALS874B			SN74ALS874B SN74ALS876A			UNIT	
		MIN	TYP <sup>†</sup>	MAX	MIN	TYP <sup>†</sup>	MAX		
$V_{IK}$	$V_{CC} = 4.5$ V, $I_I = -18$ mA			-1.2			-1.2	V	
$V_{OH}$	$V_{CC} = 4.5$ V to 5.5 V, $I_{OH} = -0.4$ mA	$V_{CC} - 2$			$V_{CC} - 2$			V	
	$V_{CC} = 4.5$ V, $I_{OH} = -1$ mA	2.4	3.3						
	$V_{CC} = 4.5$ V, $I_{OH} = -2.6$ mA				2.4	3.2			
$V_{OL}$	$V_{CC} = 4.5$ V, $I_{OL} = 12$ mA		0.25	0.4		0.25	0.4	V	
	$V_{CC} = 4.5$ V, $I_{OL} = 24$ mA					0.35	0.5		
$I_{OZH}$	$V_{CC} = 5.5$ V, $V_O = 2.7$ V			20			20	μA	
$I_{OZL}$	$V_{CC} = 5.5$ V, $V_O = 0.4$ V			-20			-20	μA	
$I_I$	$V_{CC} = 5.5$ V, $V_I = 7$ V			0.1			0.1	mA	
$I_{IH}$	$V_{CC} = 5.5$ V, $V_I = 2.7$ V			20			20	μA	
$I_{IL}$	$V_{CC} = 5.5$ V, $V_I = 0.4$ V			-0.2			-0.2	mA	
$I_O^{\ddagger}$	$V_{CC} = 5.5$ V, $V_O = 2.25$ V			-30		-112	-30		
$I_{CC}$	'ALS874B $V_{CC} = 5.5$ V	Output high		14	21		14	21	mA
		Outputs low		19	30		19	30	
		Outputs disabled		20	32		20	32	
		Outputs high					14	21	
		Outputs low					18	29	
		Outputs disabled					20	31	

<sup>†</sup>All typical values are at  $V_{CC} = 5$  V,  $T_A = 25$  °C.

<sup>‡</sup>The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current,  $I_{OS}$ .

**SN74ALS874B, SN74ALS876A**  
**SN54ALS874B**  
**DUAL 4-BIT D-TYPE EDGE-TRIGGERED FLIP-FLOPS**

'ALS874B switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V <sub>CC</sub> = 5 V, C <sub>L</sub> = 50 pF, R <sub>1</sub> = 500 Ω, R <sub>2</sub> = 500 Ω, T <sub>A</sub> = 25°C			V <sub>CC</sub> = 4.5 V to 5.5 V, C <sub>L</sub> = 50 pF, R <sub>1</sub> = 500 Ω, R <sub>2</sub> = 500 Ω, T <sub>A</sub> = MIN to MAX			UNIT	
			'ALS874B			SN54ALS874B		SN74ALS874B		
			MIN	TYP	MAX	MIN	MAX	MIN		MAX
f <sub>max</sub>			40	50	25		30		MHz	
t <sub>PLH</sub>	CLK	Any Q		8	10	4	15	4	14	ns
t <sub>PHL</sub>				8	13	4	15	4	14	
t <sub>PHL</sub>	CLR	Any Q		11	14	5	20	5	17	ns
t <sub>PZH</sub>	OC	Any Q		9	12	4	21	4	18	ns
t <sub>PZL</sub>				11	15	4	21	4	18	
t <sub>PHZ</sub>	OC	Any Q		6	8	2	12	2	10	ns
t <sub>PLZ</sub>				5.7	8	3	15	3	12	

'ALS876A switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V <sub>CC</sub> = 5 V, C <sub>L</sub> = 50 pF, R <sub>1</sub> = 500 Ω, R <sub>2</sub> = 500 Ω, T <sub>A</sub> = 25°C			V <sub>CC</sub> = 4.5 V to 5.5 V, C <sub>L</sub> = 50 pF, R <sub>1</sub> = 500 Ω, R <sub>2</sub> = 500 Ω, T <sub>A</sub> = MIN to MAX			UNIT
			'ALS876A			SN74ALS876A			
			MIN	TYP	MAX	MIN	MAX		
f <sub>max</sub>			40	50		30			MHz
t <sub>PLH</sub>	CLK	Any Q		8	11	4	14		ns
t <sub>PHL</sub>				9	12	4	14		
t <sub>PHL</sub>	PRE	Any Q		10	16	6	19		ns
t <sub>PZH</sub>	OC	Any Q		10	13	4	18		ns
t <sub>PZL</sub>				11	15	4	18		
t <sub>PHZ</sub>	OC	Any Q		6	8	2	10		ns
t <sub>PLZ</sub>				7	10	3	13		

NOTE 1: Load circuit and voltage waveforms are shown in Section 1.

## SN74AS874, SN74AS876, SN54AS874 DUAL 4-BIT D-TYPE EDGE-TRIGGERED FLIP-FLOPS

### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, $V_{CC}$ .....	7 V
Input voltage .....	7 V
Operating free-air temperature range: SN54AS874 .....	-55°C to 125°C
SN74AS874, SN74AS876 .....	0°C to 70°C
Storage temperature range .....	-65°C to 150°C

### recommended operating conditions

		SN54AS874			SN74AS874 SN74AS876			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
$V_{CC}$	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
$V_{IH}$	High-level input voltage	2			2			V
$V_{IL}$	Low-level input voltage			0.8			0.8	V
$I_{OH}$	High-level output current			-12			-15	mA
$I_{OL}$	Low-level output current			32			48	mA
$f_{clock}$	Clock frequency	0		100	0		125	MHz
$t_w$	Pulse duration	PRE or CLR low		4		2		ns
		CLK high		4		3		
		CLK low		5		4		
$t_{su}$	Setup time before CLK†	Data		2.5		2		ns
		PRE or CLR inactive		5		4		
$t_h$	Hold time, data after CLK†			1		1		ns
$T_A$	Operating free-air temperature	-55		125	0		70	°C

### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	SN54AS874			SN74AS874 SN74AS876			UNIT
			MIN	TYP†	MAX	MIN	TYP†	MAX	
$V_{IK}$		$V_{CC} = 4.5\text{ V}$ , $I_I = -18\text{ mA}$			-1.2			-1.2	V
$V_{OH}$		$V_{CC} = 4.5\text{ V to } 5.5\text{ V}$ , $I_{OH} = -2\text{ mA}$			$V_{CC} - 2$			$V_{CC} - 2$	V
		$V_{CC} = 4.5\text{ V}$ , $I_{OH} = -12\text{ mA}$			2.4	3.2			
		$V_{CC} = 4.5\text{ V}$ , $I_{OH} = -15\text{ mA}$			.		2.4	3.3	
$V_{OL}$		$V_{CC} = 4.5\text{ V}$ , $I_{OL} = 32\text{ mA}$			0.25	0.4			V
		$V_{CC} = 4.5\text{ V}$ , $I_{OL} = 48\text{ mA}$					0.35	0.5	
$I_{OZH}$		$V_{CC} = 5.5\text{ V}$ , $V_O = 2.7\text{ V}$			50		50	50	μA
$I_{OZL}$		$V_{CC} = 5.5\text{ V}$ , $V_O = 0.4\text{ V}$			-50		-50	-50	μA
$I_I$		$V_{CC} = 5.5\text{ V}$ , $V_I = 7\text{ V}$			0.1		0.1	0.1	mA
$I_{IH}$		$V_{CC} = 5.5\text{ V}$ , $V_I = 2.7\text{ V}$			20		10	10	μA
$I_{IL}$	D	$V_{CC} = 5.5\text{ V}$ , $V_I = 0.4\text{ V}$			-3		-2	-2	mA
	All other				-0.5		-0.5		
$I_{O}^{\ddagger}$		$V_{CC} = 5.5\text{ V}$ , $V_O = 2.25\text{ V}$			-30	-112	-30	-112	mA
$I_{CC}$	'AS874	$V_{CC} = 5.5\text{ V}$	Output high	82	133	82	133	mA	
			Outputs low	92	149	92	149		
			Outputs disabled	100	160	100	160		
	'AS876		Outputs high			88	142		
			Outputs low			94	150		
			Outputs disabled			100	160		

† All typical values are at  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$ .

‡ The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current,  $I_{OS}$ .

**SN74AS874, SN74AS876, SN54AS874**  
**DUAL 4-BIT D-TYPE EDGE-TRIGGERED FLIP-FLOPS**

**'AS874 switching characteristics (see Note 1)**

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V,}$ $C_L = 50 \text{ pF,}$ $R_1 = 500 \Omega,$ $R_2 = 500 \Omega,$ $T_A = \text{MIN to MAX}$				UNIT
			SN54AS874		SN74AS874		
			MIN	MAX	MIN	MAX	
$f_{max}$			100		125		MHz
$t_{PLH}$	CLK	Any Q	3	11.5	3	8.5	ns
$t_{PHL}$			4	12.5	4	10.5	
$t_{PHL}$	CLR	Any Q	4	11	4	9.5	ns
$t_{PZH}$	$\overline{OC}$	Any Q	2	8	2	7	ns
$t_{PZL}$			3	11.5	3	10.5	
$t_{PHZ}$	$\overline{OC}$	Any Q	2	7	2	6	ns
$t_{PLZ}$			2	8.5	2	7.5	

**'AS876 switching characteristics (see Note 1)**

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V,}$ $C_L = 50 \text{ pF,}$ $R_1 = 500 \Omega,$ $R_2 = 500 \Omega,$ $T_A = \text{MIN to MAX}$		UNIT
			SN74AS876		
			MIN	MAX	
$f_{max}$			125		MHz
$t_{PLH}$	CLK	Any $\overline{Q}$	3	8.5	ns
$t_{PHL}$			4	10.5	
$t_{PHL}$	PRE	Any $\overline{Q}$	4	9.5	ns
$t_{PZH}$	$\overline{OC}$	Any $\overline{Q}$	2	7	ns
$t_{PZL}$			3	10.5	
$t_{PHZ}$	$\overline{OC}$	Any $\overline{Q}$	2	6	ns
$t_{PLZ}$			2	6	

NOTE 1: Load circuit and voltage waveforms are shown in Section 1.