

CONNECTORS MANUFACTURER






Box Header 2.0mm H=6.05mm SMT/Straight Type

Specifications





Current Rate: 2.0 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

Material



Insulator: Polyester, UL 94V-0
 ©Standard: Nylon 6T
 Terminal: Copper Alloy
 Plating: Gold Plated

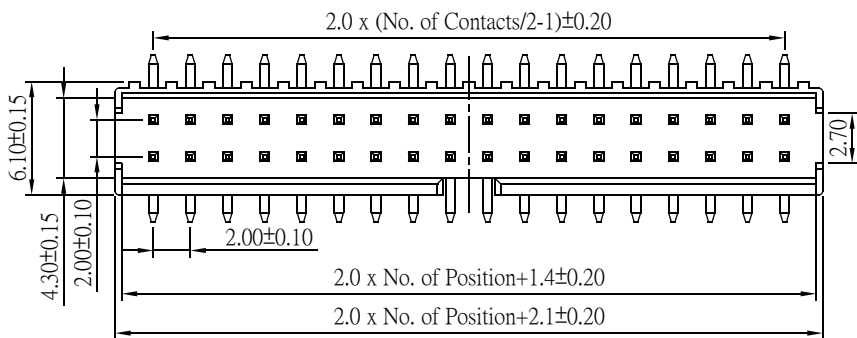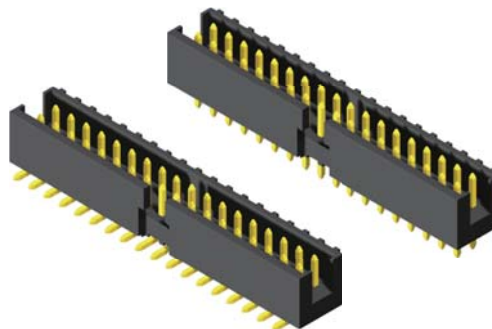


Recommended PCB Layout
(PCB TOLERANCE ±0.05)

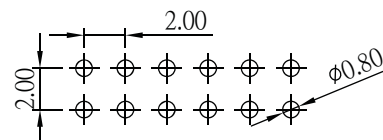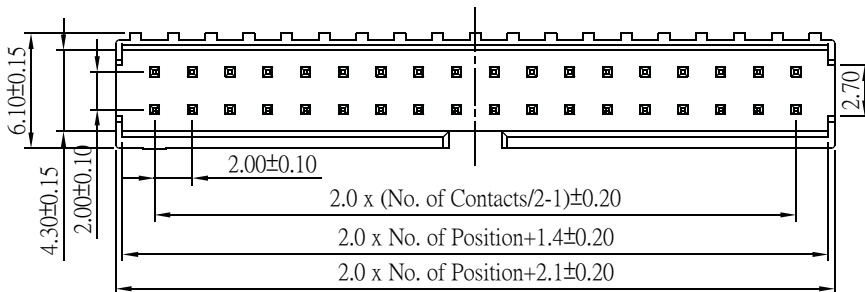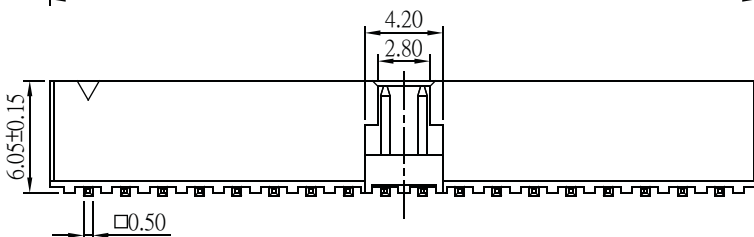

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

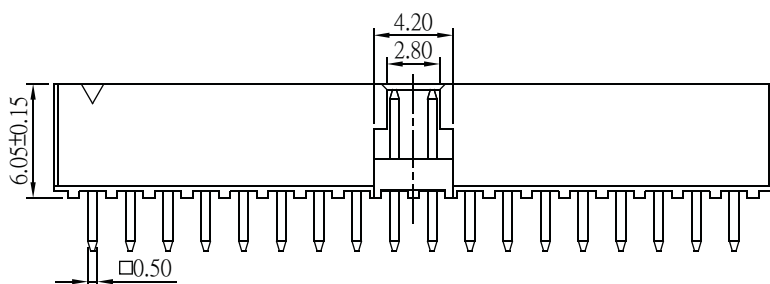

ORDER INFORMATION

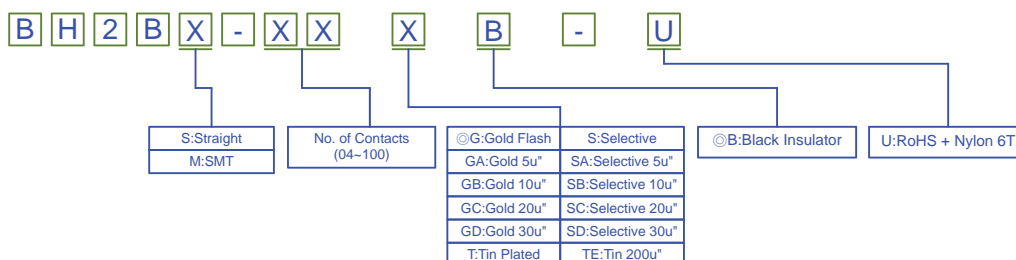

©Standard Recommended