



Micro Commercial Components

Micro Commercial Components  
 20736 Marilla Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

**BAS40-04T**  
**BAS40-05T**  
**BAS40-06T**

**Features**

- Pow Dissipation PD=150mW Tamb=25°C
- Forward Current I<sub>F</sub>=200mA
- Reverse Voltage V<sub>R</sub>=40V
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0

**150mW 40Volt**  
**Plastic-Encapsulate**  
**Diode**



**Maximum Ratings**

- Operating Temperature: -65°C to +150°C
- Storage Temperature: -65°C to +150°C

**Electrical Characteristics @ 25°C Unless Otherwise Specified**

Reverse Breakdown Voltage	V <sub>(BR)R</sub>	40V	I <sub>R</sub> =10μA
Maximum Instantaneous Forward Voltage	V <sub>F</sub>	380mV 1000mV	I <sub>FM</sub> = 1mA; I <sub>FM</sub> = 40mA;
Maximum DC Reverse Current At Rated DC Blocking Voltage	I <sub>R</sub>	200nA	V <sub>R</sub> =30Volts
Total Capacitance	C <sub>T</sub>	5pF	Measured at 1.0MHz, V <sub>R</sub> =0V
Reverse Recovery Time	T <sub>rr</sub>	5nS	I <sub>F</sub> =I <sub>R</sub> =10mA, I <sub>rr</sub> =1mA,R <sub>L</sub> =100Ω

**SOT-523**



DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.059	.067	1.50	1.70	
B	.030	.033	0.75	0.85	
C	.057	.069	1.45	1.75	
D	.020 Nominal		0.50Nominal		
E	.035	.043	0.90	1.10	
G	.000	.004	.000	.100	
H	.028	.031	.70	0.80	
J	.004	.008	.100	.200	
K	.010	.014	.25	.35	

# BAS40T/-04T/-05T/-06T



Micro Commercial Components

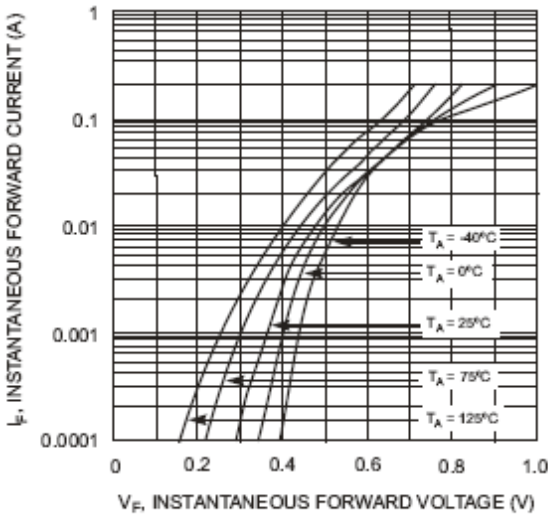


Fig. 1 Typical Forward Voltage

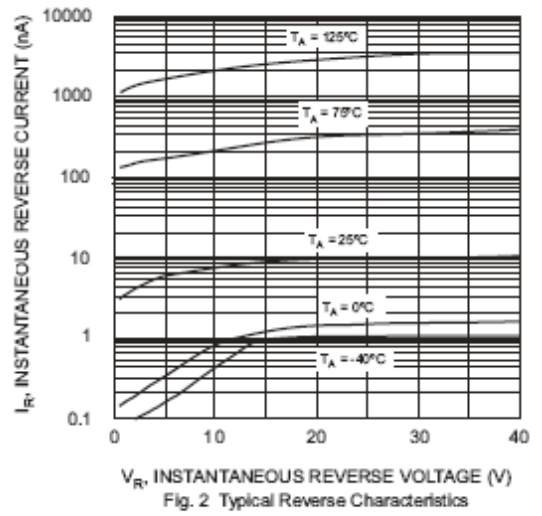


Fig. 2 Typical Reverse Characteristics

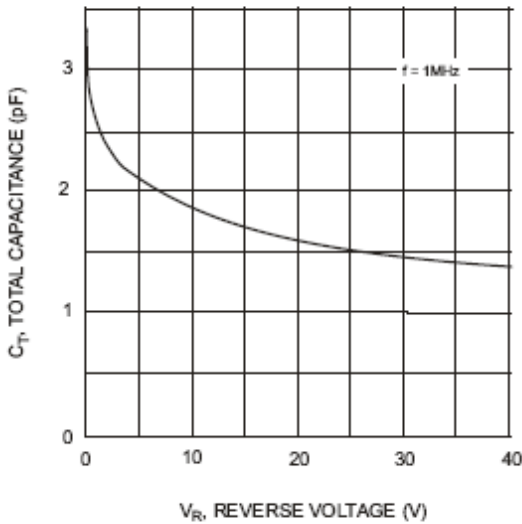


Fig. 3 Typical Capacitance





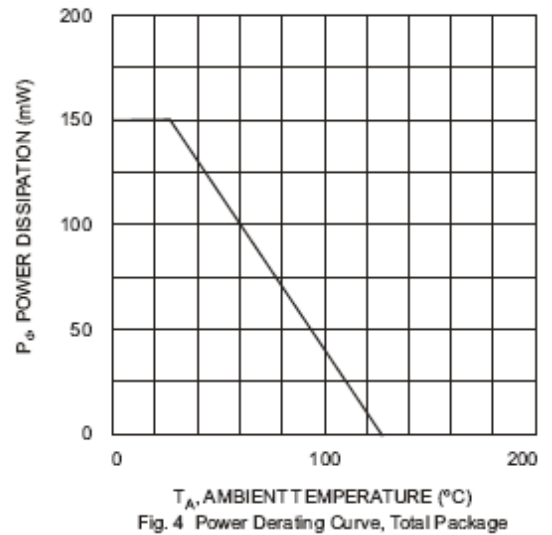


Fig. 4 Power Derating Curve, Total Package

## Marking:





TM

Micro Commercial Components

**\*\*\*IMPORTANT NOTICE\*\*\***

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

**\*\*\*APPLICATIONS DISCLAIMER\*\*\***

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.