



BC846APN

DUAL SURFACE MOUNT NPN/PNP TRANSISTORS (COMPLIMENTARY)

This device contains two electrically-isolated complimentary pair (NPN and PNP) general-purpose transistors. This device is ideal for portable applications where board space is at a premium

VOLTAGE 65 Volts **POWER** 225 mWatts

SOT-363 Unit : inch(mm)

FEATURES

- Electrically-Isolated Complimentary Transistor Pairs
- V_{CE0} 65V
- V_{CB0} 80V
- V_{EB0} 6.0V
- I_C 100mA

MECHANICAL DATA

Case: SOT-363, Plastic

Terminals: Solderable per MIL-STD-750, Method 2026

Approx. Weight: 0.006 gram

Marking : 46N





Fig.55

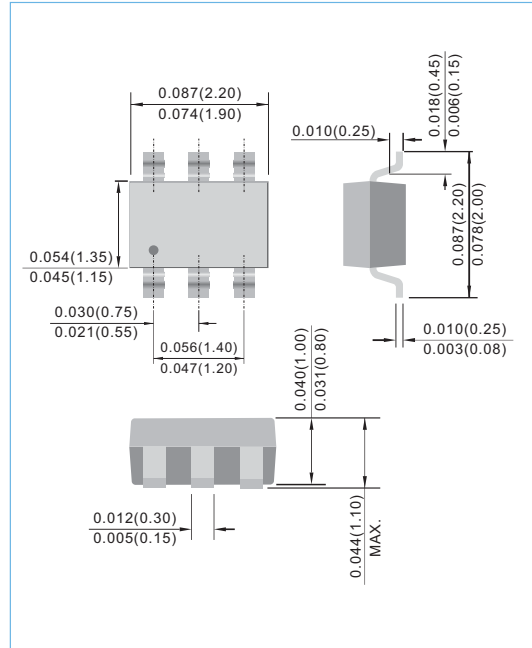

ABSOLUTE RATINGS-NPN

PARAMETER	SYMBOL	VALUE	UNITS
Collector - Emitter Voltage	V_{CE0}	65	V
Collector - Base Voltage	V_{CB0}	80	V
Emitter - Base Voltage	V_{EB0}	6.0	V
Collector Current - Continuous	I_C	100	mA

ABSOLUTE RATINGS-PNP

PARAMETER	SYMBOL	VALUE	UNITS
Collector - Emitter Voltage	V_{CE0}	-65	V
Collector - Base Voltage	V_{CB0}	-80	V
Emitter - Base Voltage	V_{EB0}	-5	V
Collector Current - Continuous	I_C	-100	mA

PAN JIT RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN,FUNCTIONS AND RELIABILITY WITHOUT NOTICE



BC846APN

THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	VALUE	UNITS
Max Power Dissipation (Note 1)	P_{TOT}	225	mW
Thermal Resistance , Junction to Ambient	$R_{\theta JA}$	556	°C/W
Junction Temperature	T_J	-55 to 150	°C
Storage Temperature	T_{STG}	-55 to 150	°C

Note 1: Transistor mounted on FR-4 board 70 x 60 x 1mm.

NPN ELECTRICAL CHARACTERISTICS (Note 2) $T_J=25^{\circ}\text{C}$ Unless otherwise noted

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Collector - Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=10\text{mA}, I_B=0$	65	-	-	V
Collector - Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=10\mu\text{A}, I_E=0$	80	-	-	V
Emitter - Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=10\mu\text{A}, I_C=0$	6.0	-	-	V
Emitter-Base Cutoff Current	I_{EBO}	$V_{EB}=5\text{V}$	-	-	100	nA
Collector-Base Cutoff Current	I_{CBO}	$V_{CB}=30\text{V}, I_E=0$ $V_{CB}=30\text{V}, I_E=0, T_J=150^{\circ}\text{C}$	-	-	15 5.0	nA uA
DC Current Gain	h_{FE}	$I_C=10\mu\text{A}, V_{CE}=5\text{V}$	-	90	-	-
DC Current Gain	h_{FE}	$I_C=2.0\text{mA}, V_{CE}=5\text{V}$	110	180	220	-
Collector - Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=10\text{mA}, I_B=0.5\text{mA}$ $I_C=100\text{mA}, I_B=5.0\text{mA}$	-	-	0.25 0.6	V
Base - Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=10\text{mA}, I_B=0.5\text{mA}$ $I_C=100\text{mA}, I_B=5.0\text{mA}$	-	0.7 0.9	-	V
Base - Emitter Voltage	$V_{CE(SAT)}$	$I_C=2\text{mA}, V_{CE}=5.0\text{V}$ $I_C=10\text{mA}, V_{CE}=5.0\text{V}$	0.58 -	0.660 -	0.70 0.77	V
Collector - Base Capacitance	C_{CBO}	$V_{CB}=10\text{V}, I_E=0, f=1\text{MH}$	-	-	4.5	pF



BC846APN

PNP ELECTRICAL CHARACTERISTICS (Note 2) $T_J=25^{\circ}\text{C}$ Unless otherwise noted

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Collector - Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=-10\text{mA}$, $I_B=0$	-65	-	-	V
Collector - Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=-10\mu\text{A}$, $I_E=0$	-80	-	-	V
Emitter - Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=-1\mu\text{A}$, $I_C=0$	-5.0	-	-	V
Emitter-Base Cutoff Current	I_{EBO}	$V_{EB}=-5\text{V}$	-	-	-100	nA
Collector-Base Cutoff Current	I_{CBO}	$V_{CB}=-30\text{V}$, $I_E=0$ $V_{CB}=-30\text{V}$, $I_E=0$, $T_J=150^{\circ}\text{C}$	-	-	-15 -4.0	nA uA
DC Current Gain	h_{FE}	$I_C=-10\mu\text{A}$, $V_{CE}=-5\text{V}$	-	90	-	-
DC Current Gain	h_{FE}	$I_C=-2.0\text{mA}$, $V_{CE}=-5\text{V}$	110	180	220	-
Collector - Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=-10\text{mA}$, $I_B=-0.5\text{mA}$ $I_C=-100\text{mA}$, $I_B=-5.0\text{mA}$	-	-	-0.30 -0.65	V
Base - Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=-10\text{mA}$, $I_B=-0.5\text{mA}$ $I_C=-100\text{mA}$, $I_B=-5.0\text{mA}$	-	-0.7 -0.9	-	V
Base - Emitter Voltage	$V_{CE(SAT)}$	$I_C=-2\text{mA}$, $V_{CE}=-5.0\text{V}$ $I_C=-10\text{mA}$, $V_{CE}=-5.0\text{V}$	-0.60 -	- -	-0.75 -0.82	V
Collector - Base Capacitance	C_{CBO}	$V_{CB}=-10\text{V}$, $I_E=0$, $f=1\text{MH}$	-	-	4.5	pF



BC846APN

NPN ELECTRICAL CHARACTERISTICS CURVE

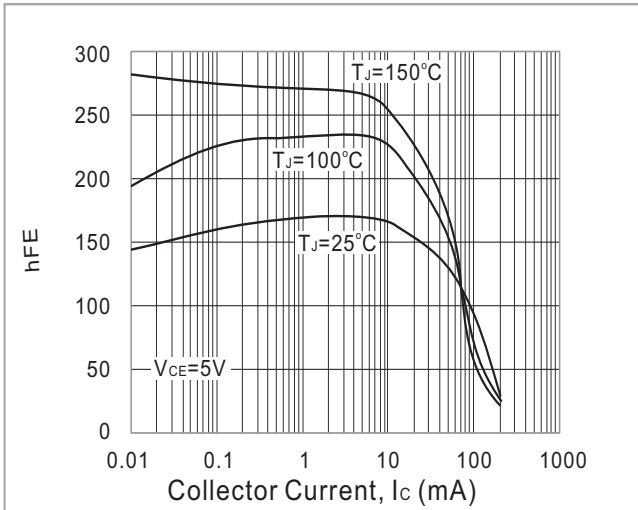


Fig.1- TYPICAL h_{FE} vs. Collector Current

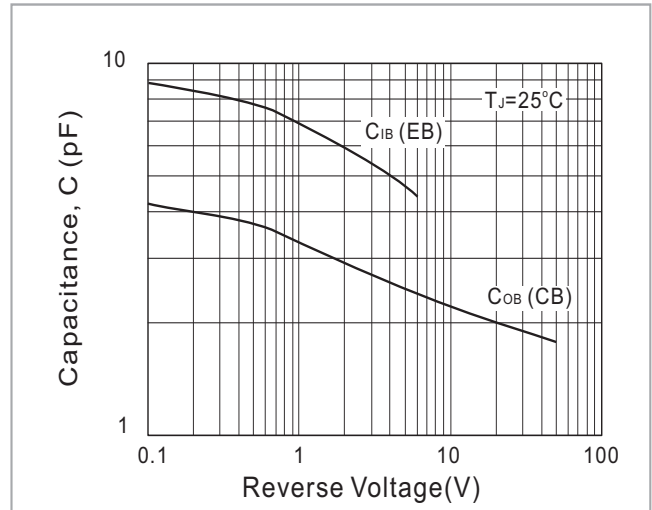


Fig.2- TYPICAL CAPACITANCES vs. REVERSE VOLTAGE

PNP ELECTRICAL CHARACTERISTICS CURVE

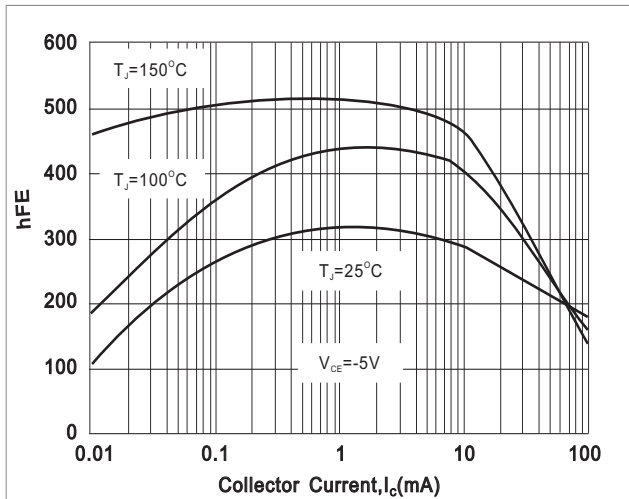


Fig.1- TYPICAL h_{FE} vs. Collector Current


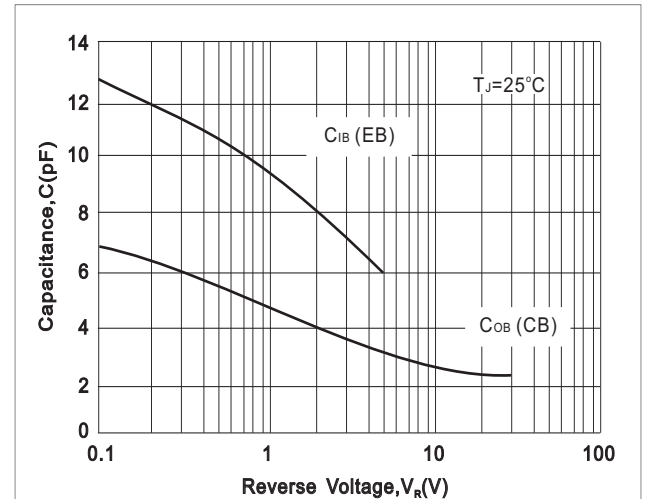


Fig.2- TYPICAL CAPACITANCES vs. REVERSE VOLTAGE



BC846APN

MOUNTING PAD LAYOUT

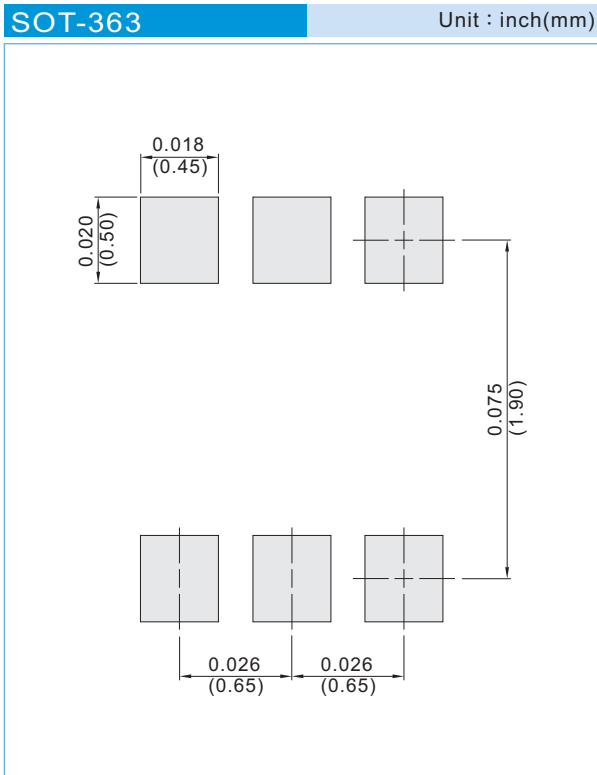

ORDER INFORMATION

- Packing information
 - T/R - 10K per 13" plastic Reel
 - T/R - 3K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2012

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.