

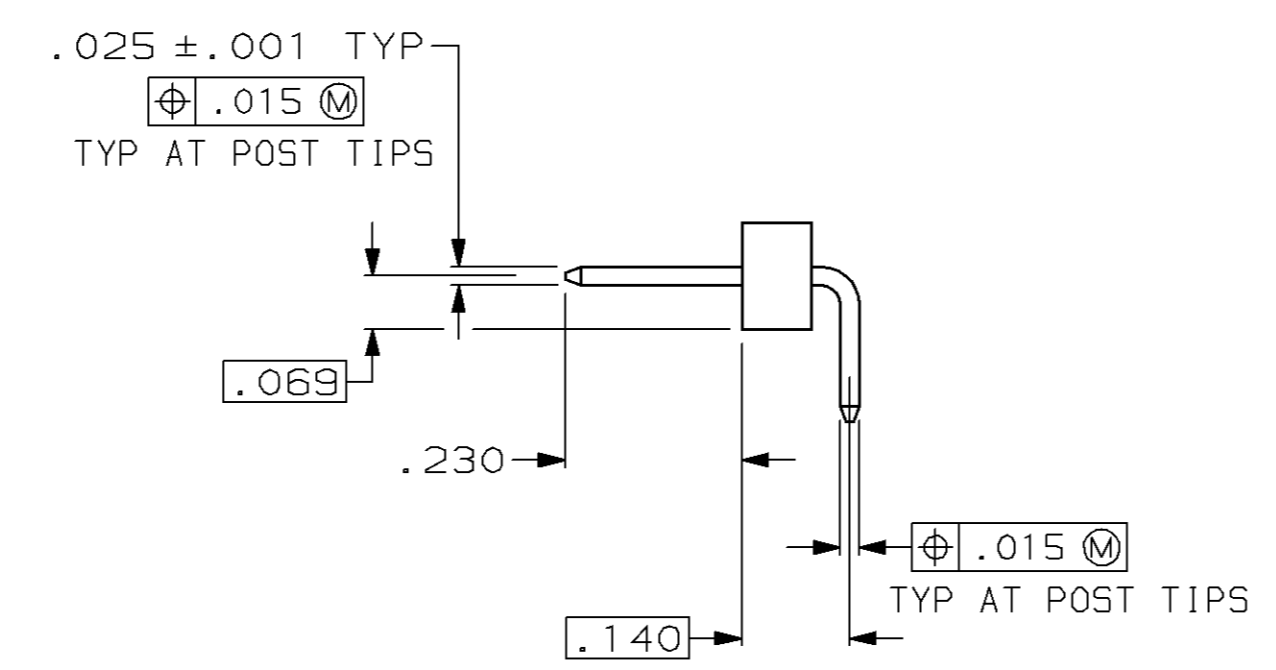
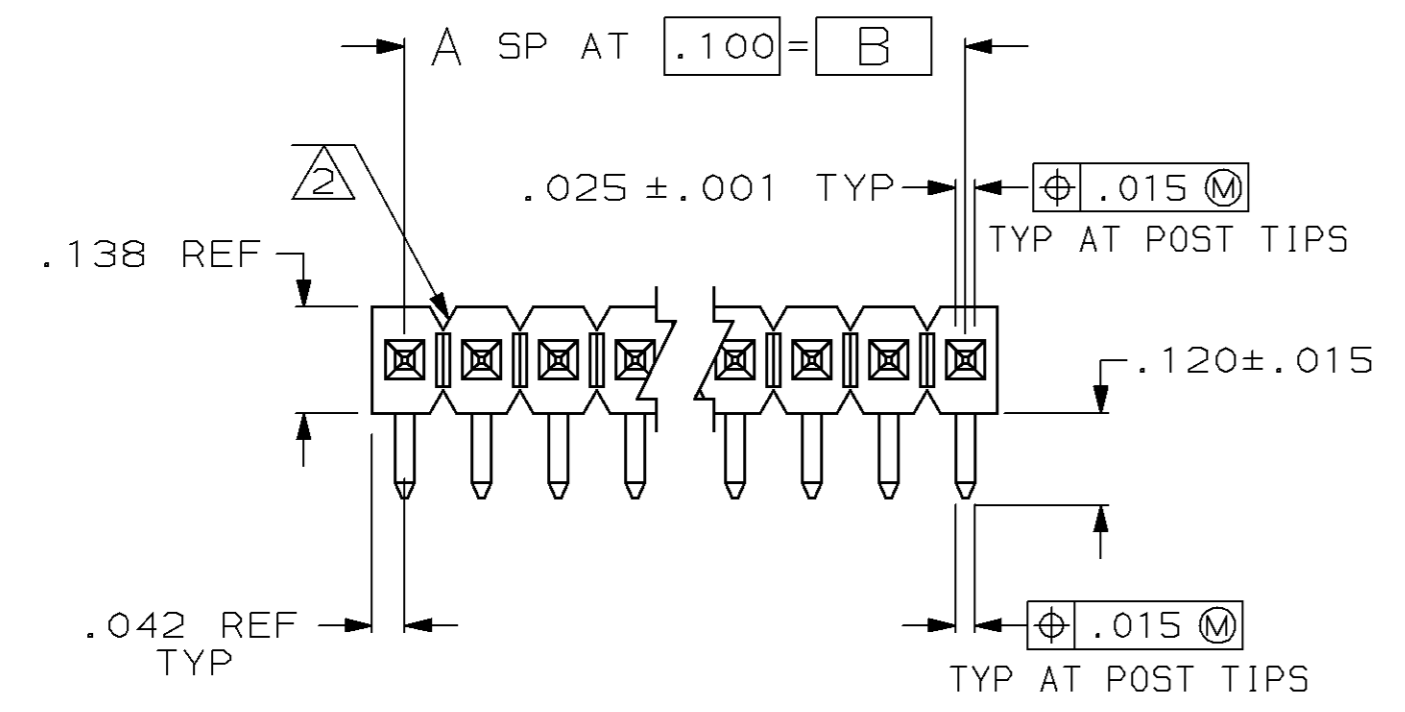


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AD	39							
				C		REV PER ECN 0010-0187-92	11/23/92	JK
				D		REV PER 0010-1752-93 TT	12-08-93	GD
				E		EC 0010-1601-95	2/20/97	GD

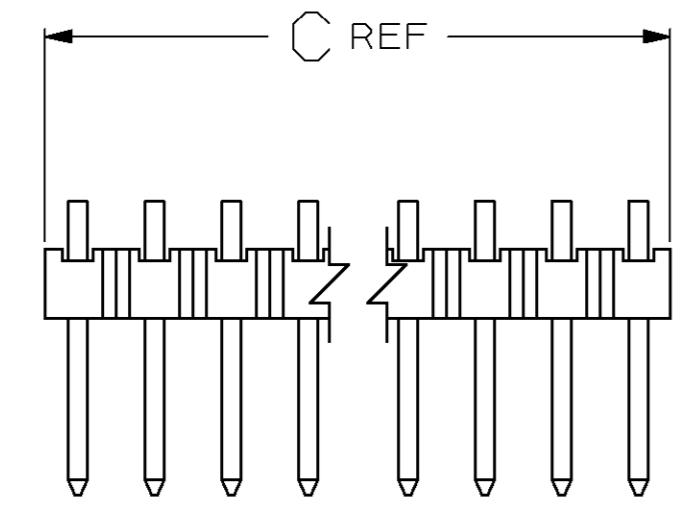

- ASSEMBLIES MAY BE BROKEN TO DESIRED NO OF POSITIONS.
- BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT

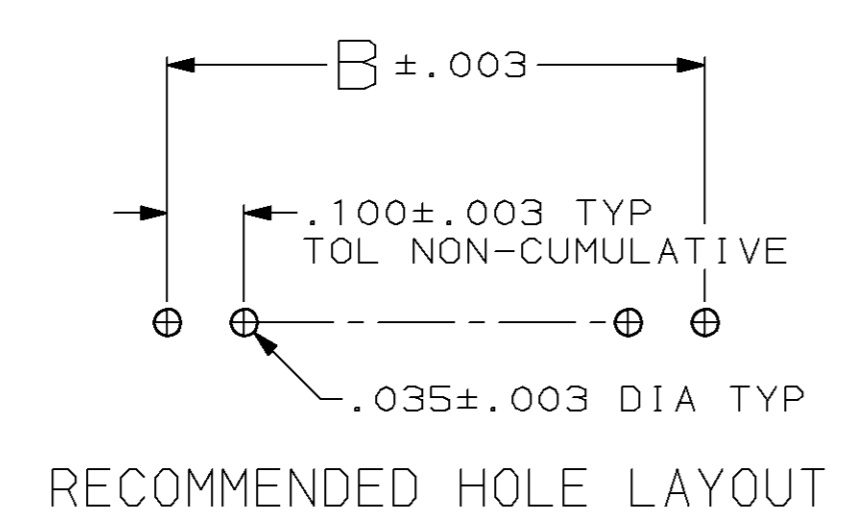

3.984	3.900	39	40	4-103329-0
3.884	3.800	38	39	3-103329-9
3.784	3.700	37	38	3-103329-8
3.684	3.600	36	37	3-103329-7
3.584	3.500	35	36	3-103329-6
3.484	3.400	34	35	3-103329-5
3.384	3.300	33	34	3-103329-4
3.284	3.200	32	33	3-103329-3
3.184	3.100	31	32	3-103329-2
3.084	3.000	30	31	3-103329-1
2.984	2.900	29	30	3-103329-0
2.884	2.800	28	29	2-103329-9
2.784	2.700	27	28	2-103329-8
2.684	2.600	26	27	2-103329-7
2.584	2.500	25	26	2-103329-6
2.484	2.400	24	25	2-103329-5
2.384	2.300	23	24	2-103329-4
2.284	2.200	22	23	2-103329-3
2.184	2.100	21	22	2-103329-2
2.084	2.000	20	21	2-103329-1
1.984	1.900	19	20	2-103329-0
1.884	1.800	18	19	1-103329-9
1.784	1.700	17	18	1-103329-8
1.684	1.600	16	17	1-103329-7
1.584	1.500	15	16	1-103329-6
1.484	1.400	14	15	1-103329-5
1.384	1.300	13	14	1-103329-4
1.284	1.200	12	13	1-103329-3
1.184	1.100	11	12	1-103329-2
1.084	1.000	10	11	1-103329-1
.984	.900	9	10	1-103329-0
.884	.800	8	9	103329-9
.784	.700	7	8	103329-8
.684	.600	6	7	103329-7
.584	.500	5	6	103329-6
.484	.400	4	5	103329-5
.384	.300	3	4	103329-4
.284	.200	2	3	103329-3
.184	.100	1	2	103329-2
.084	—	—	1	103329-1
C	B	A	NO OF POSN	PART NUMBER

PART NO			
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm (INCHES) TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± .005 ANGLES ± -	DR 10/16/92 J. MARTINELLI CHK 11/23/92 JOHN KNITTLE APPD 11/23/92 JOHN KNITTLE	AMP AMP Incorporated Harrisburg, PA 17105-3608	
MATERIAL HOUSING, FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK POSTS: PHOS BRONZE FINISH POSTS: .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL	APPD 11/23/92 B. FLINCHBAUGH PRODUCT SPEC - APPLICATION SPEC - WEIGHT -	NAME ASSEMBLY, HEADER, BREAKAWAY, MOD II, SINGLE ROW, .100¢, RIGHT ANGLE, WITH .025 SQUARE POSTS	
	SIZE D	CAGE CODE 00779	DRAWING NO 103329
	SCALE 4:1		SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

- [Home](#)
- [Part Number Search](#)
- [Text Search](#)
- [Alternate Part Search](#)
- [Multiple Part Comparison](#)
- [Alphabetical Search](#)
- [Brand Search](#)
- [Industry Product Search](#)
- [Product Type Search](#)
- [Product Family Search](#)
- [Competitor Cross Reference](#)
- [Document Number Search](#)
- [Lead Free Solutions](#)
- [Help/Glossary](#)

Current Brand View

[View All Tyco Electronics Brands](#)

Click to activate links to all other products

AMP

AMPMODU

.100 Centerline Through Hole Headers

AMP

103329-1 -- 8 of 9 products

Active

[Active](#)

(Tyco Electronics P/N: 103329-1)

Previous	Next	Sales Information	AMP ACES	Step Search Screen
		Related CAD Geometry	Related Documents	General Information
			Pricing	Product Availability

Please use the customer drawing for all design activity.

- **Customer Drawing: 103329, Rev. E**
Document Title: ASSEMBLY, HEADER, BREAKAWAY, MOD II, SINGLE ROW, .100@22, RIGHT ANGLE, WITH .025 SQUARE POSTS

[163550.pdf](#) [163550.pdf](#) (63K)

The photographs and/or line drawings below are representative images of a product for viewing purposes only.

[Product Photo](#)

Searchable Features:

Brand:	AMP
Header Type:	Breakaway
No. of Rows:	Single
No. of Positions:	1
Mount Angle:	Right Angle
PCB Retention Feature:	Without
Surface Mount Compatible:	No
Contact Mating Area Plating:	Tin-Lead
Board Standoff:	Without
Mounting Ears:	Without
Panel Attachment:	No
Mating Connector Lock:	Without
High Temperature Housing:	No
High Speed Serial Data Connector:	No
Termination Post Length (mm [in]):	3.05 [.120]

Other Properties:

Centerline Spacing (mm [in]):	2.54 [.100]
Post Size (mm [in]):	0.64 [.025] Sq.
Mating Post Length (mm [in]):	5.84 [.230]
Contact Material:	Phosphor Bronze
Solder Tail Plating:	Tin-Lead over Nickel
Housing Material:	Thermoplastic
Housing Flammability Rating:	UL 94V-0
Comment:	Headers may be broken to desired number of positions using Hand Tool No. 91406-1, or Tool Kit No. 314818-1. Other tail lengths are available, consult AMP Incorporated.

[Copyright](#) and [Privacy Statement](#)

Visit [Tyco International, Ltd.](#)

[Products](#) | [Brands](#) | [Industries](#) | [Customer Service](#) | [About](#) | [Home](#)