
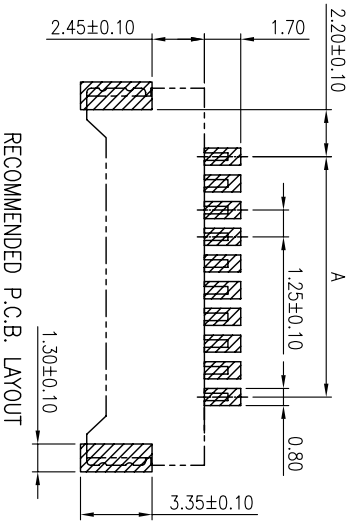
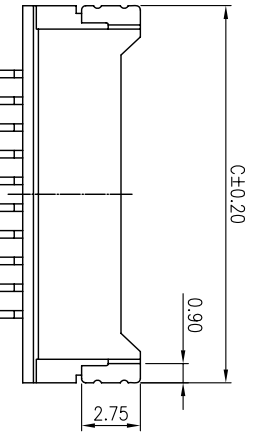

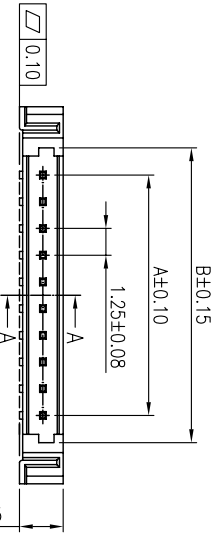


SYMBOL		DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE	APPROVED
Δ	Δ				Δ			
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!								008

PART NO.	CIRCUITS	DIMENSIONS			
		A	B	C	D
MCu006-Rt02T	1X2	1.25	3.80	7.65	-
MCu006-Rt03T	1X3	2.50	5.05	8.90	-
MCu006-Rt04T	1X4	3.75	6.30	10.15	2.50
MCu006-Rt05T	1X5	5.00	7.55	11.40	3.75
MCu006-Rt06T	1X6	6.25	8.80	12.65	5.00
MCu006-Rt07T	1X7	7.50	10.05	13.90	6.25
MCu006-Rt08T	1X8	8.75	11.30	15.15	7.50
MCu006-Rt09T	1X9	10.00	12.55	16.40	8.75
MCu006-Rt10T	1X10	11.25	13.80	17.65	10.00
MCu006-Rt11T	1X11	12.50	15.05	18.90	11.25
MCu006-Rt12T	1X12	13.75	16.30	20.15	12.50
MCu006-Rt13T	1X13	15.00	17.55	21.40	13.75
MCu006-Rt14T	1X14	16.25	18.80	22.65	15.00
MCu006-Rt15T	1X15	17.50	20.05	23.90	16.25
MCu006-Rt16T	1X16	18.75	21.30	25.15	17.50
MCu006-Rt17T	1X17	20.00	22.55	26.40	18.75
MCu006-Rt18T	1X18	21.25	23.80	27.65	20.00
MCu006-Rt19T	1X19	22.50	25.05	28.90	21.25
MCu006-Rt20T	1X20	23.75	26.30	30.15	
MCu006-Rt21T	1X21	25.00	27.55	31.40	
MCu006-Rt22T	1X22	26.25	28.80	32.65	
MCu006-Rt23T	1X23	27.50	30.05	33.90	
MCu006-Rt24T	1X24	28.75	31.30	35.15	
MCu006-Rt25T	1X25	30.00	32.55	36.40	22.50
MCu006-Rt26T	1X26	31.25	33.80	37.65	
MCu006-Rt27T	1X27	32.50	35.05	38.90	
MCu006-Rt28T	1X28	33.75	36.30	40.15	
MCu006-Rt29T	1X29	35.00	37.55	41.40	
MCu006-Rt30T	1X30	36.25	38.80	42.65	


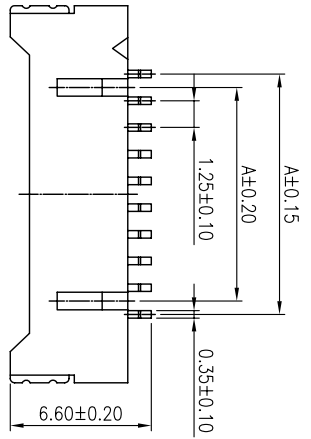


**SPECIFICATIONS**  
 VOLTAGE RATING: 125V AC/DC  
 CURRENT RATING: 1A AC/DC  
 WITHSTAND VOLTAGE : 250V AC/MINUTE  
 INSULATION RESISTANCE: 100MΩ MIN.  
 TEMPERATURE RANGE: -25°C ~ +85°C  
 CONTACT RESISTANCE: 20mΩ MAX.

**MATERIAL**  
 CONTACT: COPPER ALLOY, TIN PLATED  
 MOUNTED EAR: BRASS, TIN PLATED  
 BASE: NYLON UL94V-0

**ORDER INFORMATION**  
 MCu006-RtXXT  
 MC: WAFER SERIES  
 u: PITCH, 1.25X1.25mm  
 006: SERIES NO.  
 Rt: PCB TYPE, R/A SURFACE MOUNT  
 XX: NO. OF CONTACTS  
 T: CONTACT PLATING, TIN PLATED OVER ALL

MATING		HOUSING		TERMINAL		MODEL	
TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.25		MCu006-__-H		MCu006-T			
SYMBOL	UNIT	SCALE	CHECKED	WENDY	03/MAR/08	TITLE	WAFER
Δ	mm	4/1	APPROVALS			NO.	MCu006-Rt__T



MMT CORPORATION