



MBRB30..CTPbF MBR30..CT-1PbF

SCHOTTKY RECTIFIER

30 Amp

$I_{F(AV)} = 30\text{Amp}$
 $V_R = 35 - 45\text{V}$

Major Ratings and Characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform (Per Device)	30	A
I_{FRM} @ $T_C = 123^\circ\text{C}$ (PerLeg)	30	A
V_{RRM}	35-45	V
I_{FSM} @ $t_p = 5\mu\text{s}$ sine	1020	A
V_F @ 20Apk, $T_J = 125^\circ\text{C}$	0.6	V
T_J range	-65 to 150	$^\circ\text{C}$


Description/ Features

This center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150° C T_J operation
- Center tap TO-220, D²Pak and TO-262 packages
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Lead-Free ("PbF" suffix)


Case Styles

MBRB30..CTPbF



D²PAK

MBR30..CT-1PbF



TO-262

MBRB30..CTPbF, MBR30..CT-1PbF Series

Bulletin PD-21046 rev. A 07/06



Voltage Ratings

Parameters	MBRB3035CTPbF MBR3035CT-1PbF	MBRB3045CTPbF MBR3045CT-1PbF
V _R Max. DC Reverse Voltage (V)	35	45
V _{RRM} Max. Working Peak Reverse Voltage (V)		

Absolute Maximum Ratings

Parameters	Values	bits	Conditions
I _{F(AV)} Max. Average Forward Current (Per Leg) (Per Device)	15 30	A	@ T _C = 123° C, (Rated V _R)
I _{FRM} Peak Repetitive Forward Current (Per Leg)	30	A	Rated V _R , square wave, 20kHz T _C = 123° C
I _{FSM} 10µs Repetitive Peak Surge Current	1020 200	A	5µs Sine or 3µs Rect. pulse Following any rated load condition and with rated V _{RRM} applied Surge applied at rated load conditions halfwave, single phase, 60Hz
E _{AS} 10µs Repetitive Avalanche Energy	10	mJ	(Per Leg) T _J = 25° C, I _{AS} = 2 Amps, L = 5 mH
I _{AR} Repetitive Avalanche Current (Per Leg)	2	A	Current decaying linearly to zero in 1µsec Frequency limited by T _J , max. V _A = 1.5 x V _R typical

Electrical Specifications

Parameters	Values	bits	Conditions
V _{FM} Max. Forward Voltage Drop (1)	0.76 0.6 0.72	V	@ 30A T _J = 25° C @ 20A @ 30A T _J = 125° C
I _{RM} Max. Instantaneous Reverse Current (1)	1 100	mA	T _J = 25° C T _J = 125° C Rated DC voltage
V _{F(TO)} Threshold Voltage	0.29	V	T _J = T _J max.
r _t Forward Slope Resistance	13.6	mΩ	
C _T Max. Junction Capacitance	80	pF	V _R = 5V _{DC} (test signal range 100Khz to 1Mhz) 25° C
L _S Typical Series Inductance	80	nH	Measured from top of terminal to mounting plane
dv/dt Max. Voltage Rate of Change	10000	V/µs	(Rated V _R)

Thermal-Mechanical Specifications

(1) Pulse width < 300 µs, Duty Cycle < 2%

Parameters	Values	bits	Conditions
T _J Max. Junction Temperature Range	-65 to 150	°C	
T _{stg} Max. Storage Temperature Range	-65 to 175	°C	
R _{thJC} Max. Thermal Resistance Junction to Case (Per Leg)	1.5	°C/WDC	operation
R _{thCS} Typical Thermal Resistance Case to Heatsink	0.50	°C/W	Mounting surface, smooth and greased Only for TO-220
R _{thJA} Max. Thermal Resistance Junction to Ambient	50	°C/WDC	operation For D ² Pak and TO-262
wt Approximate Weight	2 (0.07)	g(oz.)	
T Mounting Torque	Min. 6 (5) Max. 12 (10)	Kg-cm (lbf-in)	lubricated threads
Device Marking	MBRB30..CT MBR30..CT-1		Case style D ² Pak Case style TO-262

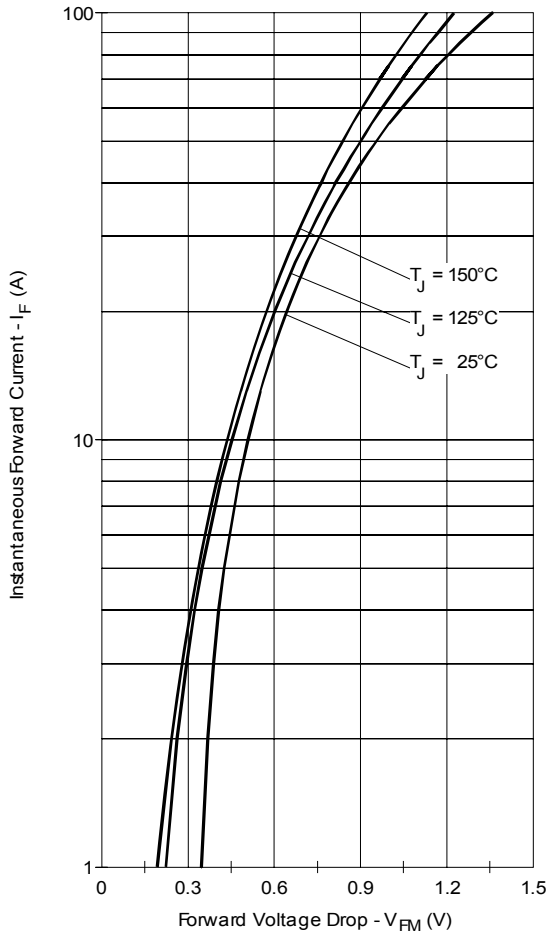


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

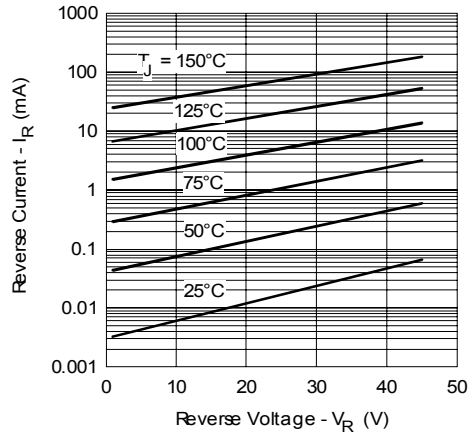


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

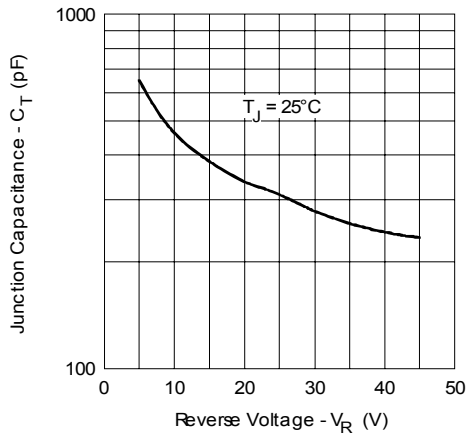


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

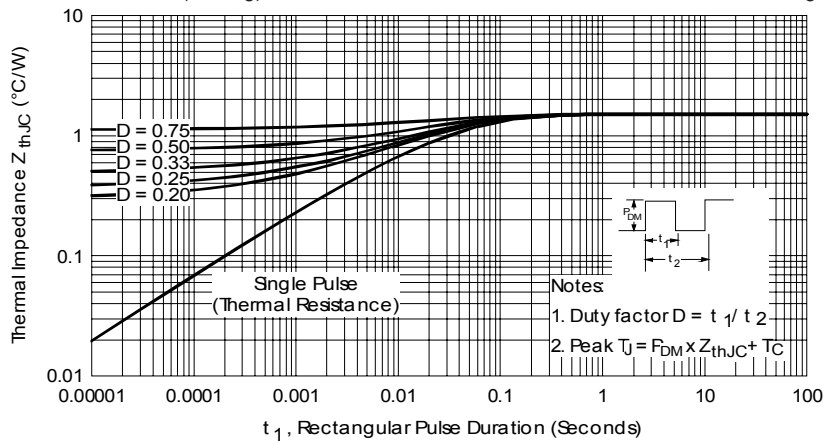


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

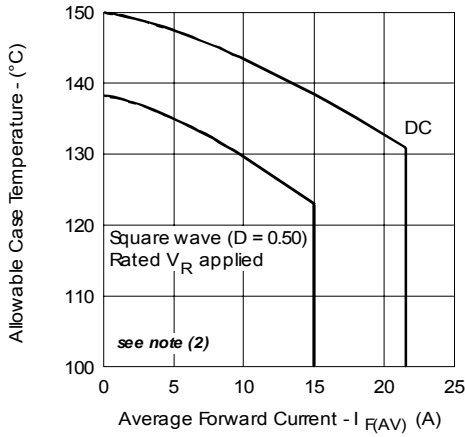


Fig. 5- Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

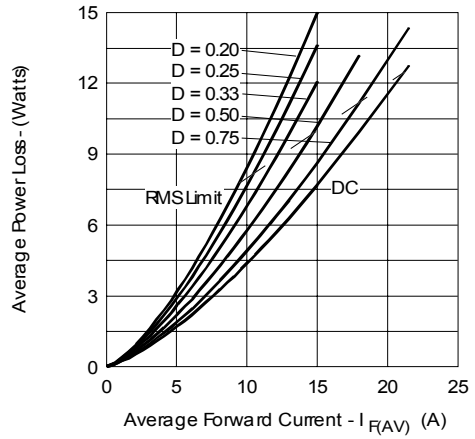


Fig. 6- Forward Power Loss Characteristics (Per Leg)

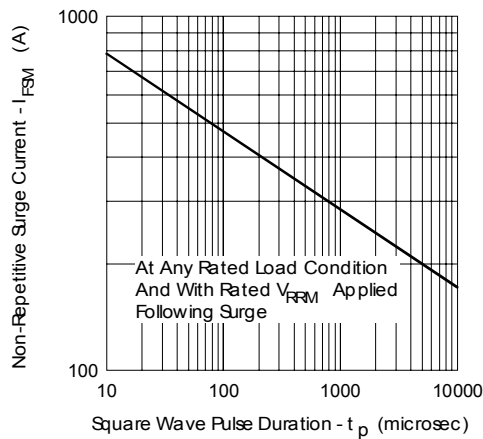




Fig. 7- Max. Non-Repetitive Surge Current (Per Leg)

(2) Formula used: $T_c = T_j - (P_d + P_{d_{REV}}) \times R_{thJC}$

P_d = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

$P_{d_{REV}}$ = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1}$ = rated V_R

Outlines Table

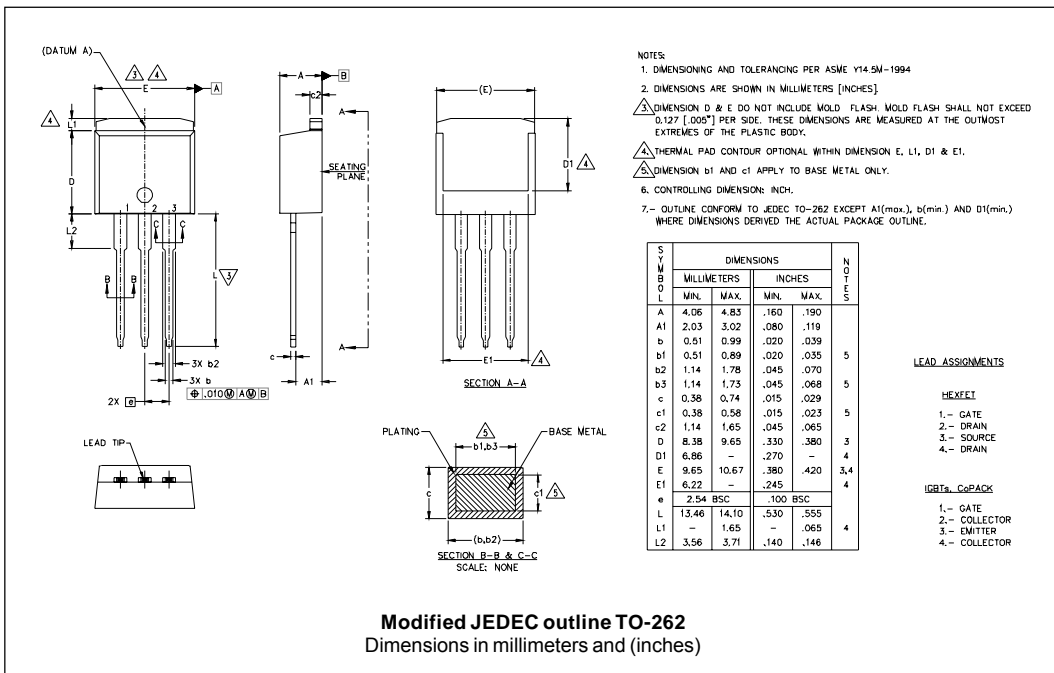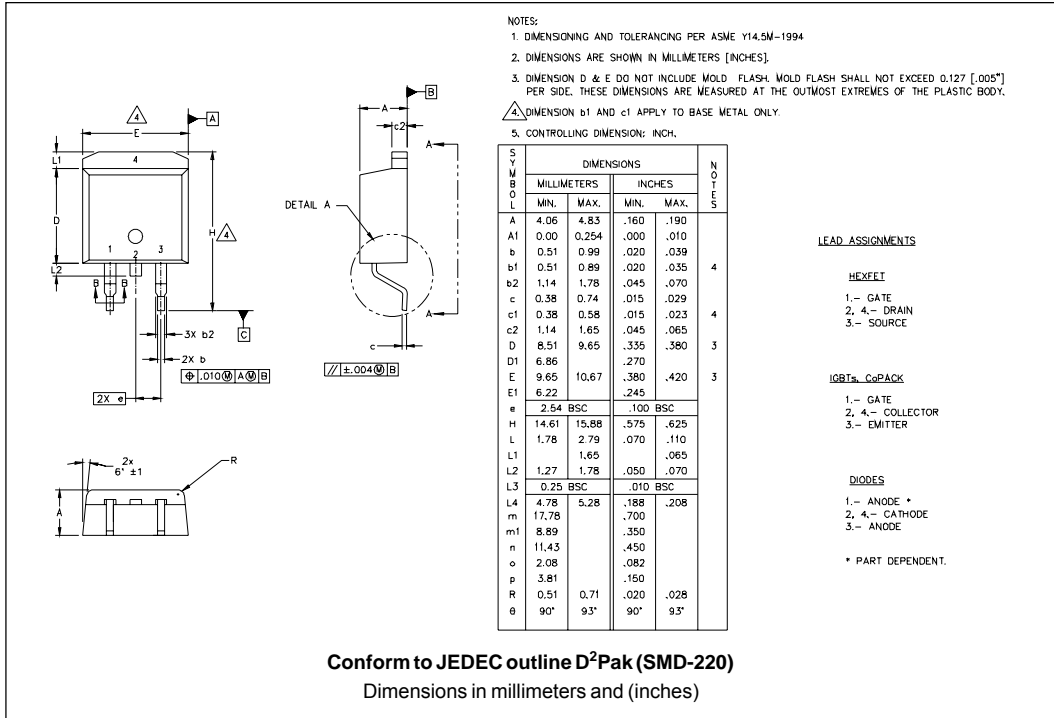

Part Marking Information

D²PAK

EXAMPLE: THIS IS A MBRB3045CT
 LOT CODE 8024
 ASSEMBLED ON WW 02, 2000

Note: "P" in assembly line position indicates "Lead-Free"

INTERNATIONAL RECTIFIER LOGO

PART NUMBER

DATE CODE

ASSEMBLY LOT CODE

YEAR 0 = 2000
 WEEK 02
 P = LEAD-FREE

TO-262

EXAMPLE: THIS IS A MBR3045CT-1
 LOT CODE 1789
 ASSEMBLED ON WW 19, 2002

Note: "P" in assembly line position indicates "Lead-Free"

INTERNATIONAL RECTIFIER LOGO

PART NUMBER

DATE CODE

ASSEMBLY LOT CODE

YEAR 2 = 2002
 WEEK 19
 P = LEAD-FREE

Tape & Reel Information

SECTION Y-Y

Ao	10.50	+/- 0.1
Bo	15.80	+/- 0.1
B2	10.25	+/- 0.1
Ko	4.90	+/- 0.1
F	11.50	+/- 0.1
P1	16.00	+/- 0.1
W	24.00	+/- 0.3

NOTES:

- 1.0 SPROCKET HOLE PITH CUMULATIVE TOLERANCE ±.02
- 2.0 CAMBER NOT TO EXCEED 1mm in 100mm
- 3.0 MATERIAL: CONDUCTIVE BLACK STYRENIC ALLOY
- 4.0 K₀ MEASURED FROM A PLANE ON THE INSIDE BOTTOM OF THE POCKET TO THE TOP SURFACE OF THE CARRIER
- 5.0 MEASURED FROM CENTRELINE OF SPROCKET HOLE TO CENTRELINE OF POCKET
- 6.0 VENDOR: (OPTIONAL)
- 7.0 MUST ALSO MEET REQUIREMENTS OF EIA STANDAR #EIA-481A TAPING OF SURFACE MOUNT COMPONENTS FOR AUTOMATIC PLACEMENT
- 8.0 SURFACE RESISTIVITY OF MOLDED MATL. MUST MEASURE LESS OR EQUAL TO 10⁶ OHMS PER SQUARE. MEASURED IN ACCORDANCE TO PROCEDURE GIVEN IN ASTM D-257 & ASTM D-991
- 9.0 TOTAL LENGTH PER REEL MUST BE 45 METERS
- 10.0 Ⓢ CRITICAL

Dimensions in millimeters and (inches)

Ordering Information Table

Device Code																	
	<table border="1" style="margin: auto;"> <tr> <td style="padding: 5px;">MBR</td> <td style="padding: 5px;">B</td> <td style="padding: 5px;">30</td> <td style="padding: 5px;">45</td> <td style="padding: 5px;">CT</td> <td style="padding: 5px;">-1</td> <td style="padding: 5px;">TRL</td> <td style="padding: 5px;">PbF</td> </tr> <tr> <td style="text-align: center;">①</td> <td style="text-align: center;">②</td> <td style="text-align: center;">③</td> <td style="text-align: center;">④</td> <td style="text-align: center;">⑤</td> <td style="text-align: center;">⑥</td> <td style="text-align: center;">⑦</td> <td style="text-align: center;">⑧</td> </tr> </table>	MBR	B	30	45	CT	-1	TRL	PbF	①	②	③	④	⑤	⑥	⑦	⑧
MBR	B	30	45	CT	-1	TRL	PbF										
①	②	③	④	⑤	⑥	⑦	⑧										
1	- Essential Part Number																
2	- B = Surface Mount None = TO-220																
3	- Current Rating (30A)																
4	- Voltage code: Code = V_{RRM}																
5	- CT = Essential Part Number																
6	- "-1" = TO-262																
7	- <ul style="list-style-type: none"> • none = Tube (50 pieces) • TRL = Tape & Reel (Left Oriented - for D²Pak only) • TRR = Tape & Reel (Right Oriented - for D²Pak only) 																
8	- <ul style="list-style-type: none"> • none = Standard Production • PbF = Lead-Free 																

35 = 35V
45 = 45V

Data and specifications subject to change without notice.
 This product has been designed and qualified for Industrial Level and Lead-Free.
 Qualification Standards can be found on IR's Web site.



Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.